

AZ-500.prepaway.premium.exam.207q

Number: AZ-500
Passing Score: 800
Time Limit: 120 min
File Version: 12.0



AZ-500

Microsoft Azure Security Technologies

Version 12.0

Manage identity and access

Testlet 1

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://www.litwareinc.com and http://www.litwareinc.com.
RG1	Resource group	RG1 is a resource group that contains VNet1, VM0, and VM1.
RG2	Resource group	RG2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Standard tier.

Requirements

Planned Changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Identity and Access Requirements

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to RG2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- Microsoft Antimalware must be installed on the virtual machines in RG1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role.
- Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in RG1. Role1 must be available only for RG1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

Data and Application Requirements

Litware identifies the following data and applications requirements:

- The users in Group2 must be able to authenticate to SQLDB1 by using their Azure AD credentials.
- WebApp1 must enforce mutual authentication.

General Requirements

Litware identifies the following general requirements:

- Whenever possible, administrative effort must be minimized.
- Whenever possible, use of automation must be maximized.

QUESTION 1

You need to meet the identity and access requirements for Group1.

What should you do?

- A. Add a membership rule to Group1.
- B. Delete Group1. Create a new group named Group1 that has a group type of Office 365. Add users and devices to the group.
- C. Modify the membership rule of Group1.
- D. Change the membership type of Group1 to **Assigned**. Create two groups that have dynamic memberships. Add the new groups to Group1.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Incorrect Answers:

A, C: You can create a dynamic group for devices or for users, but you can't create a rule that contains both users and devices.

D: For assigned group you can only add individual members.

Scenario:

Litware identifies the following identity and access requirements: All San Francisco users and their devices must be members of Group1.

The tenant currently contain this group:

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/users-groups-roles/groups-dynamic-membership>

<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-groups-create-azure-portal>

QUESTION 2

HOTSPOT

You need to ensure that the Azure AD application registration and consent configurations meet the identity and access requirements.

What should you use in the Azure portal? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

To configure the registration settings:

	▼
Azure AD – User settings	
Azure AD – App registrations settings	
Enterprise Applications – User settings	

To configure the consent settings:

	▼
Azure AD – User settings	
Azure AD – App registrations settings	
Enterprise Applications – User settings	

Correct Answer:

Answer Area

To configure the registration settings:

	▼
Azure AD – User settings	
Azure AD – App registrations settings	
Enterprise Applications – User settings	

To configure the consent settings:

	▼
Azure AD – User settings	
Azure AD – App registrations settings	
Enterprise Applications – User settings	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/manage-apps/configure-user-consent>

Manage identity and access

Testlet 2

Case Study

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Contoso, Ltd. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The company hosts its entire server infrastructure in Azure.

Contoso has two Azure subscriptions named Sub1 and Sub2. Both subscriptions are associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

Existing Environment

Azure AD

Contoso.com contains the users shown in the following table.

Name	City	Role
User1	Montreal	Global administrator
User2	MONTREAL	Security administrator
User3	London	Privileged role administrator
User4	Ontario	Application administrator
User5	Seattle	Cloud application administrator
User6	Seattle	User administrator
User7	Sydney	Reports reader
User8	Sydney	None
User9	Sydney	Owner

Contoso.com contains the security groups shown in the following table.

Name	Membership type	Dynamic membership rule
Group1	Dynamic user	user.city -contains "ON"
Group2	Dynamic user	user.city -match "**on"

Sub1

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6.

User9 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

Sub1 contains the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Allowed resource types	networkSecurityGroups	RG4
Not allowed resource types	virtualNetworks/subnets	RG5
Not allowed resource types	networkSecurityGroups	RG5
Not allowed resource types	virtualNetworks/virtualNetworkPeerings	RG6

Sub2

Sub2 contains the virtual networks shown in the following table.

Name	Subnet
VNetwork1	Subnet11, Subnet12, and Subnet13
VNetwork2	Subnet21

Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet11
VM2	NIC2	ASG2	Subnet11
VM3	NIC3	<i>None</i>	Subnet12
VM4	NIC4	ASG1	Subnet13
VM5	NIC5	<i>None</i>	Subnet21

All virtual machines have public IP addresses and the Web Server (IIS) role installed. The firewalls for each virtual machine allow ping requests and web requests.

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet11
NSG3	Subnet13
NSG4	Subnet21

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG3 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	TCP	ASG1	ASG1	Allow
150	Any	Any	ASG2	VirtualNetwork	Allow
200	Any	Any	Any	Any	Deny
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG4 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	Any	Any	Any	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG1, NSG2, NSG3, and NSG4 have the outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	Any	Internet	Allow
65500	Any	Any	Any	Any	Deny

Technical requirements

Contoso identifies the following technical requirements:

- Deploy Azure Firewall to VNetwork1 in Sub2.
- Register an application named App2 in contoso.com.
- Whenever possible, use the principle of least privilege.
- Enable Azure AD Privileged Identity Management (PIM) for contoso.com.

QUESTION 1

You need to ensure that User2 can implement PIM.

What should you do first?

- A. Assign User2 the Global administrator role.
- B. Configure authentication methods for contoso.com.
- C. Configure the identity secure score for contoso.com.
- D. Enable multi-factor authentication (MFA) for User2.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To start using PIM in your directory, you must first enable PIM.

1. Sign in to the Azure portal as a Global Administrator of your directory.

You must be a Global Administrator with an organizational account (for example, @yourdomain.com), not a Microsoft account (for example, @outlook.com), to enable PIM for a directory.

Scenario: Technical requirements include: Enable Azure AD Privileged Identity Management (PIM) for contoso.com

References:

<https://docs.microsoft.com/bs-latn-ba/azure/active-directory/privileged-identity-management/pim-getting-started>

Manage identity and access

Question Set 3

QUESTION 1

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Sub1.

You have an Azure Storage account named sa1 in a resource group named RG1.

Users and applications access the blob service and the file service in sa1 by using several shared access signatures (SASs) and stored access policies.

You discover that unauthorized users accessed both the file service and the blob service.

You need to revoke all access to sa1.

Solution: You create a new stored access policy.

Does this meet the goal?

A. Yes

B. No

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To revoke a stored access policy, you can either delete it, or rename it by changing the signed identifier. Changing the signed identifier breaks the associations between any existing signatures and the stored access policy. Deleting or renaming the stored access policy immediately effects all of the shared access signatures associated with it.

References:

<https://docs.microsoft.com/en-us/rest/api/storageservices/Establishing-a-Stored-Access-Policy>

QUESTION 2

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (Azure AD).

You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials.

You need to configure the environment to support the planned authentication.

Solution: You deploy the On-premises data gateway to the on-premises network.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead, you connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions:

- Create Azure Virtual Network.
- Create a custom DNS server in the Azure Virtual Network.
- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver.
- Configure forwarding between the custom DNS server and your on-premises DNS server.

References:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

QUESTION 3

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (Azure AD).

You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials.

You need to configure the environment to support the planned authentication.

Solution: You create a site-to-site VPN between the virtual network and the on-premises network.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You can connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions:

- Create Azure Virtual Network.
- Create a custom DNS server in the Azure Virtual Network.
- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver.
- Configure forwarding between the custom DNS server and your on-premises DNS server.

References:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

QUESTION 4

Your network contains an Active Directory forest named contoso.com. The forest contains a single domain.

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

You plan to deploy Azure AD Connect and to integrate Active Directory and the Azure AD tenant.

You need to recommend an integration solution that meets the following requirements:

- Ensures that password policies and user logon restrictions apply to user accounts that are synced to the tenant
- Minimizes the number of servers required for the solution.

Which authentication method should you include in the recommendation?

- A. federated identity with Active Directory Federation Services (AD FS)
- B. password hash synchronization with seamless single sign-on (SSO)
- C. pass-through authentication with seamless single sign-on (SSO)

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Password hash synchronization requires the least effort regarding deployment, maintenance, and infrastructure. This level of effort typically applies to organizations that only need their users to sign in to Office 365, SaaS apps, and other Azure AD-based resources. When turned on, password hash synchronization is part of the Azure AD Connect sync process and runs every two minutes.

Incorrect Answers:

A: A federated authentication system relies on an external trusted system to authenticate users. Some companies want to reuse their existing federated system investment with their Azure AD hybrid identity solution. The maintenance and management of the federated system falls outside the control of Azure AD. It's up to the organization by using the federated system to make sure it's deployed securely and can handle the authentication load.

C: For pass-through authentication, you need one or more (we recommend three) lightweight agents installed on existing servers. These agents must have access to your on-premises Active Directory Domain Services, including your on-premises AD domain controllers. They need outbound access to the Internet and access to your domain controllers. For this reason, it's not supported to deploy the agents in a perimeter network.

Pass-through Authentication requires unconstrained network access to domain controllers. All network traffic is encrypted and limited to authentication requests.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/hybrid/how-to-connect-pta>

QUESTION 5

Your network contains an on-premises Active Directory domain named corp.contoso.com.

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

You sync all on-premises identities to Azure AD.

You need to prevent users who have a `givenName` attribute that starts with `TEST` from being synced to Azure AD. The solution must minimize administrative effort.

What should you use?

- A. Synchronization Rules Editor
- B. Web Service Configuration Tool
- C. the Azure AD Connect wizard
- D. Active Directory Users and Computers

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Use the Synchronization Rules Editor and write attribute-based filtering rule.

References:

<https://docs.microsoft.com/en-us/azure/active-directory/hybrid/how-to-connect-sync-change-the-configuration>

QUESTION 6

DRAG DROP

You are implementing conditional access policies.

You must evaluate the existing Azure Active Directory (Azure AD) risk events and risk levels to configure and implement the policies.

You need to identify the risk level of the following risk events:

- Users with leaked credentials
- Impossible travel to atypical locations
- Sign-ins from IP addresses with suspicious activity

Which level should you identify for each risk event? To answer, drag the appropriate levels to the correct risk events. Each level may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Levels	Answer Area	
High	Impossible travel to atypical locations:	
Low	Users with leaked credentials:	
Medium	Sign-ins from IP addresses with suspicious activity:	

Correct Answer:

Levels	Answer Area	
High	Impossible travel to atypical locations:	Medium
Low	Users with leaked credentials:	High
Medium	Sign-ins from IP addresses with suspicious activity:	Low

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure AD Identity protection can detect six types of suspicious sign-in activities:

- Users with leaked credentials
- Sign-ins from anonymous IP addresses
- Impossible travel to atypical locations
- Sign-ins from infected devices
- Sign-ins from IP addresses with suspicious activity
- Sign-ins from unfamiliar locations

These six types of events are categorized in to 3 levels of risks – High, Medium & Low:

Sign-in Activity	Risk Level
Users with leaked credentials	High
Sign-ins from anonymous IP addresses	Medium
Impossible travel to atypical locations	Medium
Sign-ins from infected devices	Medium
Sign-ins from IP addresses with suspicious activity	Low
Sign-ins from unfamiliar locations	Medium

References:

<http://www.rebeladmin.com/2018/09/step-step-guide-configure-risk-based-azure-conditional-access-policies/>

QUESTION 7

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table.

Name	Member of	Mobile phone	Multi-factor authentication (MFA) status
User1	Group1	123 555 7890	Disabled
User2	Group1, Group2	None	Enabled
User3	Group1	123 555 7891	Required

You create and enforce an Azure AD Identity Protection user risk policy that has the following settings:

- Assignment: Include Group1, Exclude Group2
- Conditions: Sign-in risk of Medium and above
- Access: Allow access, Require password change

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
If User1 signs in from an unfamiliar location, he must change his password.	☐	☐
If User2 signs in from an anonymous IP address, she must change her password.	☐	☐
If User3 signs in from a computer containing malware that is communicating with known bot servers, he must change his password.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
If User1 signs in from an unfamiliar location, he must change his password.	☒	☐
If User2 signs in from an anonymous IP address, she must change her password.	☒	☐
If User3 signs in from a computer containing malware that is communicating with known bot servers, he must change his password.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Yes

User1 is member of Group1. Sign in from unfamiliar location is risk level Medium.

Box 2: Yes

User2 is member of Group1. Sign in from anonymous IP address is risk level Medium.

Box 3: No

Sign-ins from IP addresses with suspicious activity is low.

Note:

Sign-in Activity	Risk Level
Users with leaked credentials	High
Sign-ins from anonymous IP addresses	Medium
Impossible travel to atypical locations	Medium
Sign-ins from infected devices	Medium
Sign-ins from IP addresses with suspicious activity	Low
Sign-ins from unfamiliar locations	Medium

Azure AD Identity protection can detect six types of suspicious sign-in activities:

- Users with leaked credentials
- Sign-ins from anonymous IP addresses
- Impossible travel to atypical locations
- Sign-ins from infected devices
- Sign-ins from IP addresses with suspicious activity
- Sign-ins from unfamiliar locations

These six types of events are categorized in to 3 levels of risks – High, Medium & Low:

References:

<http://www.rebeladmin.com/2018/09/step-step-guide-configure-risk-based-azure-conditional-access-policies/>

QUESTION 8

DRAG DROP

You need to configure an access review. The review will be assigned to a new collection of reviews and reviewed by resource owners.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Create an access review program.

Set Reviewers to Selected users.

Create an access review audit.

Create an access review control.

Set Reviewers to Group owners.

Set Reviewers to Members.

Answer Area



Correct Answer:

Actions

Create an access review program.

Set Reviewers to Selected users.

Create an access review audit.

Create an access review control.

Set Reviewers to Group owners.

Set Reviewers to Members.

Answer Area

Create an access review program.

Create an access review control.

Set Reviewers to Group owners.



Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Create an access review program

Step 2: Create an access review control

Step 3: Set Reviewers to Group owners

In the Reviewers section, select either one or more people to review all the users in scope. Or you can select to have the members review their own access. If the resource is a group, you can ask the group owners to review.



References:

<https://docs.microsoft.com/en-us/azure/active-directory/governance/create-access-review>

<https://docs.microsoft.com/en-us/azure/active-directory/governance/manage-programs-controls>

QUESTION 9

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Role	Sign in frequency
User1	Password administrator	Signs in every work day
User2	Password administrator	Signs in bi-weekly
User3	Global administrator, Password administrator	Signs in every month

You configure an access review named Review1 as shown in the following exhibit.

Create an access review

Access reviews allow reviewers to attest to whether users still need to be in a role. [Learn more about access reviews here.](#)

* Review name ✓

Description ⓘ

* Start date

Frequency ▼

Duration (in days) ⓘ ☐ ☐

End ⓘ

* Number of times

* End date

Users

Scope ☒ Everyone

* Review role membership >

Password Administrator

Reviewers

Reviewers ▼

^ Upon completion settings

Auto apply results to resource ⓘ

Should reviewer not respond ⓘ ▼

▼ Advanced settings

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User3 can perform Review1 for

	▼
User3 only	
User1 and User2 only	
User1, User2, and User3	

If User2 fails to complete Review1 by June 20, 2020

	▼
The Password administrator role will be revoked from User2	
User2 will retain the Password administrator role	
User3 will receive a confirmation request	

Correct Answer:

Answer Area

User3 can perform Review1 for

	▼
User3 only	
User1 and User2 only	
User1, User2, and User3	

If User2 fails to complete Review1 by June 20, 2020

	▼
The Password administrator role will be revoked from User2	
User2 will retain the Password administrator role	
User3 will receive a confirmation request	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: User3 only

Use the Members (self) option to have the users review their own role assignments.

Box 2: User3 will receive a confirmation request

Use the Should reviewer not respond list to specify what happens for users that are not reviewed by the reviewer within the review period. This setting does not impact users who have been reviewed by the reviewers manually. If the final reviewer's decision is Deny, then the user's access will be removed.

No change - Leave user's access unchanged

Remove access - Remove user's access

Approve access - Approve user's access

Take recommendations - Take the system's recommendation on denying or approving the user's continued access

Reference:

<https://docs.microsoft.com/bs-latn-ba/azure/active-directory/privileged-identity-management/pim-how-to-start-security-review>

QUESTION 10

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

An administrator named Admin1 has access to the following identities:

- An OpenID-enabled user account
- A Hotmail account
- An account in contoso.com
- An account in an Azure AD tenant named fabrikam.com

You plan to use Azure Account Center to transfer the ownership of Sub1 to Admin1.

To which accounts can you transfer the ownership of Sub1?

- A. contoso.com only
- B. contoso.com, fabrikam.com, and Hotmail only
- C. contoso.com and fabrikam.com only
- D. contoso.com, fabrikam.com, Hotmail, and OpenID-enabled user account

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

When you transfer billing ownership of your subscription to an account in another Azure AD tenant, you can move the subscription to the new account's tenant. If you do so, all users, groups, or service principals who had role based access (RBAC) to manage subscriptions and its resources lose their access. Only the user in the new account who accepts your transfer request will have access to manage the resources.

Reference:

<https://docs.microsoft.com/en-us/azure/billing/billing-subscription-transfer>

<https://docs.microsoft.com/en-us/azure/billing/billing-subscription-transfer#transferring-subscription-to-an-account-in-another-azure-ad-tenant>

QUESTION 11

HOTSPOT

Your company has two offices in Seattle and New York. Each office connects to the Internet by using a NAT device. The offices use the IP addresses shown in the following table.

Location	IP address space	Public NAT segment
Seattle	10.10.0.0/16	190.15.1.0/24
New York	172.16.0.0/16	194.25.2.0/24

The company has an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Multi-factor authentication (MFA) status
User1	Enabled
User2	Enforced

The MFA service settings are configured as shown in the exhibit. (Click the Exhibit tab.)

trusted ips [\(learn more\)](#)

☒ Skip multi-factor authentication for requests from federated users on my intranet

Skip multi-factor authentication for requests from following range of IP address subnets

10.10.0.0/16
194.25.2.0/24

verification options [\(learn more\)](#)

Methods available to users:

- ☒ Call to phone
- ☒ Text message to phone
- ☐ Notification through mobile app
- ☐ Verification code from mobile app or hardware token

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

	Yes	No
If User1 signs in to Azure from a device that uses an IP address of 134.18.14.10, User1 must be authenticated by using a phone.	☐	☐
If User2 signs in to Azure from a device in the Seattle office, User2 must be authenticated by using the Microsoft Authenticator app.	☐	☐
If User2 signs in to Azure from a device in the New York office, User1 must be authenticated by using a phone	☐	☐

Correct Answer:

Answer Area

	Yes	No
If User1 signs in to Azure from a device that uses an IP address of 134.18.14.10, User1 must be authenticated by using a phone.	☒	☐
If User2 signs in to Azure from a device in the Seattle office, User2 must be authenticated by using the Microsoft Authenticator app.	☐	☒
If User2 signs in to Azure from a device in the New York office, User1 must be authenticated by using a phone	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 2: No

Use of Microsoft Authenticator is not required.

Note: Microsoft Authenticator is a multifactor app for mobile devices that generates time-based codes used during the Two-Step Verification process.

Box 3: No

The New York IP address subnet is included in the "skip multi-factor authentication for request.

References:

<https://www.cayosoft.com/difference-enabling-enforcing-mfa/>

QUESTION 12

Your company plans to create separate subscriptions for each department. Each subscription will be associated to the same Azure Active Directory (Azure AD) tenant.

You need to configure each subscription to have the same role assignments.

What should you use?

- A. Azure Security Center
- B. Azure Policy
- C. Azure AD Privileged Identity Management (PIM)
- D. Azure Blueprints

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Just as a blueprint allows an engineer or an architect to sketch a project's design parameters, Azure Blueprints enables cloud architects and central information technology groups to define a repeatable set of Azure resources that implements and adheres to an organization's standards, patterns, and requirements.

Blueprints are a declarative way to orchestrate the deployment of various resource templates and other artifacts such as:

- Role Assignments
- Policy Assignments
- Azure Resource Manager templates

- Resource Groups

Reference:

<https://docs.microsoft.com/en-us/azure/governance/blueprints/overview>

QUESTION 13

HOTSPOT

You have an Azure Container Registry named Registry1.

You add role assignments for Registry1 as shown in the following table.

User	Role
User1	AcrPush
User2	AcrPull
User3	AcrImageSigner
User4	Contributor

Which users can upload images to Registry1 and download images from Registry1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Upload images: ▼

User1 only
User1 and User4 only
User1, User3, and User4
User1, User2, User3, and User4

Download images: ▼

User2 only
User1 and User2 only
User2 and User4 only
User1, User2, and User4
User1, User2, User3, and User4

Correct Answer:

Answer Area

Upload images:

▼

User1 only

User1 and User4 only

User1, User3, and User4

User1, User2, User3, and User4

Download images:

▼

User2 only

User1 and User2 only

User2 and User4 only

User1, User2, and User4

User1, User2, User3, and User4

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: User1 and User4 only

Owner, Contributor and AcrPush can push images.

Box 2: User1, User2, and User4

All, except AcrImagineSigner, can download/pull images.

Role/Permission	Access Resource Manager	Create/delete registry	Push image	Pull image	Delete image data	Change policies	Sign images
Owner	X	X	X	X	X	X	
Contributor	X	X	X	X	X	X	
Reader	X			X			
AcrPush			X	X			
AcrPull				X			
AcrDelete					X		
AcrImageSigner							X

References:

<https://docs.microsoft.com/bs-latn-ba/azure/container-registry/container-registry-roles>

QUESTION 14

You have an Azure subscription.

You create an Azure web app named Contoso1812 that uses an S1 App Service plan.

You plan to create a CNAME DNS record for www.contoso.com that points to Contoso1812.

You need to ensure that users can access Contoso1812 by using the https://www.contoso.com URL.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Turn on the system-assigned managed identity for Contoso1812.
- B. Add a hostname to Contoso1812.
- C. Scale out the App Service plan of Contoso1812.
- D. Add a deployment slot to Contoso1812.
- E. Scale up the App Service plan of Contoso1812.
- F. Upload a PFX file to Contoso1812.

Correct Answer: BF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

B: You can configure Azure DNS to host a custom domain for your web apps. For example, you can create an Azure web app and have your users access it using either www.contoso.com or contoso.com as a fully qualified domain name (FQDN).

To do this, you have to create three records:

A root "A" record pointing to contoso.com

A root "TXT" record for verification

A "CNAME" record for the www name that points to the A record

F: To use HTTPS, you need to upload a PFX file to the Azure Web App. The PFX file will contain the SSL certificate required for HTTPS.

References:

<https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain>

QUESTION 15

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named sub1.

You have an Azure Storage account named sa1 in a resource group named RG1.

Users and applications access the blob service and the file service in sa1 by using several shared access signatures (SASs) and stored access policies.

You discover that unauthorized users accessed both the file service and the blob service.

You need to revoke all access to sa1.

Solution: You create a lock on sa1.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To revoke a stored access policy, you can either delete it, or rename it by changing the signed identifier. Changing the signed identifier breaks the associations between any existing signatures and the stored access policy. Deleting or renaming the stored access policy immediately affects all of the shared access signatures associated with it.

References:

<https://docs.microsoft.com/en-us/rest/api/storageservices/Establishing-a-Stored-Access-Policy>

QUESTION 16

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (Azure AD).

You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials.

You need to configure the environment to support the planned authentication.

Solution: You deploy Azure Active Directory Domain Services (Azure AD DS) to the Azure subscription.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead, you connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions:

- Create Azure Virtual Network.

- Create a custom DNS server in the Azure Virtual Network.
- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver.
- Configure forwarding between the custom DNS server and your on-premises DNS server.

References:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

QUESTION 17

Your network contains an Active Directory forest named contoso.com. You have an Azure Directory (Azure AD) tenant named contoso.com.

You plan to configure synchronization by using the Express Settings installation option in Azure AD Connect.

You need to identify which roles and groups are required to perform the planned configuration. The solution must use the principle of least privilege.

Which two roles and groups should you identify? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. the Domain Admins group in Active Directory
- B. the Security administrator role in Azure AD
- C. the Global administrator role in Azure AD
- D. the User administrator role in Azure AD
- E. the Enterprise Admins group in Active Directory

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/active-directory/hybrid/reference-connect-accounts-permissions>

QUESTION 18

DRAG DROP

You create an Azure subscription with Azure AD Premium P2.

You need to ensure that you can use Azure Active Directory (Azure AD) Privileged Identity Management (PIM) to secure Azure AD roles.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Discover privileged roles.

Sign up PIM for Azure AD roles.

Consent to PIM.

Discover resources.

Verify your identity by using multi-factor authentication (MFA).

Answer Area**Correct Answer:****Actions**

Discover privileged roles.

Discover resources.

Answer Area

Consent to PIM.


Verify your identity by using multi-factor authentication (MFA).

Sign up PIM for Azure AD roles.

Section: (none)

Explanation**Explanation/Reference:**

Explanation:

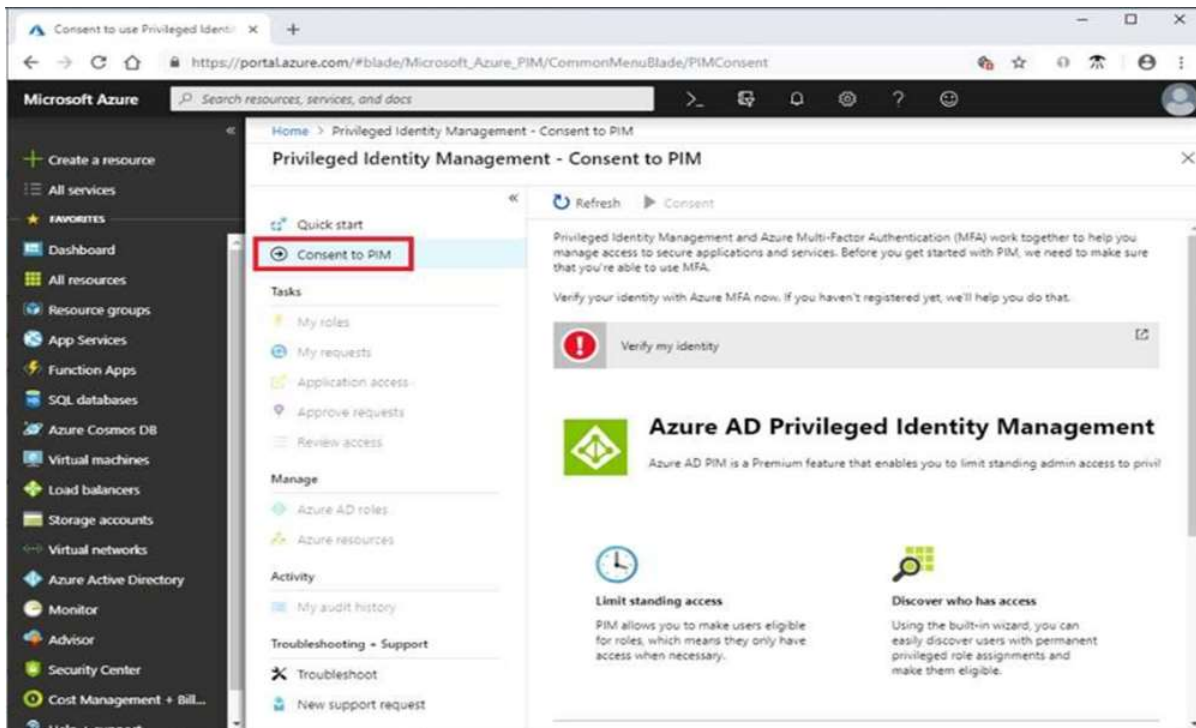

Step: 2 Verify your identity by using multi-factor authentication (MFA)
 Click Verify my identity to verify your identity with Azure MF
 You'll be asked to pick an account.

Step 3: Sign up PIM for Azure AD roles
 Once you have enabled PIM for your directory, you'll need to sign up PIM to manage Azure AD roles.

QUESTION 19

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a hybrid configuration of Azure Active Directory (Azure AD).

You have an Azure HDInsight cluster on a virtual network.

You plan to allow users to authenticate to the cluster by using their on-premises Active Directory credentials.

You need to configure the environment to support the planned authentication.

Solution: You deploy an Azure AD Application Proxy.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead, you connect HDInsight to your on-premises network by using Azure Virtual Networks and a VPN gateway.

Note: To allow HDInsight and resources in the joined network to communicate by name, you must perform the following actions:

- Create Azure Virtual Network.
- Create a custom DNS server in the Azure Virtual Network.
- Configure the virtual network to use the custom DNS server instead of the default Azure Recursive Resolver.
- Configure forwarding between the custom DNS server and your on-premises DNS server.

Reference:

<https://docs.microsoft.com/en-us/azure/hdinsight/connect-on-premises-network>

QUESTION 20

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Sub1.

You have an Azure Storage account named sa1 in a resource group named RG1.

Users and applications access the blob service and the file service in sa1 by using several shared access signatures (SASs) and stored access policies.

You discover that unauthorized users accessed both the file service and the blob service.

You need to revoke all access to sa1.

Solution: You regenerate the access keys.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead you should create a new stored access policy.

To revoke a stored access policy, you can either delete it, or rename it by changing the signed identifier. Changing the signed identifier breaks the associations between any existing signatures and the stored access policy. Deleting or renaming the stored access policy immediately affects all of the shared access signatures associated with it.

Reference:

<https://docs.microsoft.com/en-us/rest/api/storageservices/Establishing-a-Stored-Access-Policy>

QUESTION 21
HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table.

Name	Member of	Multi-factor authentication (MFA) status
User1	None	Disabled
User2	Group1	Disabled
user3	Group1	Enforced

Azure AD Privileged Identity Management (PIM) is enabled for the tenant.

In PIM, the Password Administrator role has the following settings:

- Maximum activation duration (hours): 2
- Send email notifying admins of activation: Disable
- Require incident/request ticket number during activation: Disable
- Require Azure Multi-Factor Authentication for activation: Enable
- Require approval to activate this role: Enable
- Selected approver: Group1

You assign users the Password Administrator role as shown in the following table.

Name	Assignment type
User1	Active
User2	Eligible
user3	Eligible

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer area	Statements	Yes	No
	When User1 signs in, the user is assigned the Password Administrator role automatically.	☐	☐
	User2 can request to activate the Password Administrator role.	☐	☐
	If User3 wants to activate the Password Administrator role, the user can approve their own request.	☐	☐

Correct Answer:

Answer area	Statements	Yes	No
	When User1 signs in, the user is assigned the Password Administrator role automatically.	☐	☒
	User2 can request to activate the Password Administrator role.	☒	☐
	If User3 wants to activate the Password Administrator role, the user can approve their own request.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Yes

Active assignments don't require the member to perform any action to use the role. Members assigned as active have the privileges assigned to the role at all times.

Box 2: No

MFA is disabled for User2 and the setting Require Azure Multi-Factor Authentication for activation is enabled.

Note: Eligible assignments require the member of the role to perform an action to use the role. Actions might include performing a multi-factor authentication (MFA) check, providing a business justification, or requesting approval from designated approvers.

Box 3: Yes

User3 is Group1, which is a Selected Approver Group

Reference:

<https://docs.microsoft.com/bs-latn-ba/azure/active-directory/privileged-identity-management/pim-resource-roles-assign-roles>

QUESTION 22

You have a hybrid configuration of Azure Active Directory (Azure AD). You have an Azure SQL Database instance that is configured to support Azure AD authentication.

Database developers must connect to the database instance and authenticate by using their on-premises Active Directory account.

You need to ensure that developers can connect to the instance by using Microsoft SQL Server Management Studio. The solution must minimize authentication prompts.

Which authentication method should you recommend?

- A. Active Directory - Password
- B. Active Directory - Universal with MFA support
- C. SQL Server Authentication
- D. Active Directory - Integrated

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Use Active Directory password authentication when connecting with an Azure AD principal name using the Azure AD managed domain.

Use this method to authenticate to SQL DB/DW with Azure AD for native or federated Azure AD users. A native user is one explicitly created in Azure AD and being authenticated using user name and password, while a federated user is a Windows user whose domain is federated with Azure AD. The latter method (using user & password) can be used when a user wants to use their windows credential, but their local machine is not joined with the domain (for example, using a remote access). In this case, a Windows user can indicate their domain account and password and can authenticate to SQL DB/DW using federated credentials.

Incorrect Answers:

D: Use Active Directory integrated authentication if you are logged in to Windows using your Azure Active Directory credentials from a federated domain.

References:

<https://docs.microsoft.com/en-us/azure/sql-database/sql-database-aad-authentication-configure>

QUESTION 23

You plan to use Azure Resource Manager templates to perform multiple deployments of identically configured Azure virtual machines. The password for the administrator account of each deployment is stored as a secret in different Azure key vaults.

You need to identify a method to dynamically construct a resource ID that will designate the key vault containing the appropriate secret during each deployment. The name of the key vault and the name of the secret will be provided as inline parameters.

What should you use to construct the resource ID?

- A. a key vault access policy
- B. a linked template
- C. a parameters file
- D. an automation account

Correct Answer: C


Section: (none)

Explanation

Explanation/Reference:

Explanation:

You reference the key vault in the parameter file, not the template. The following image shows how the parameter file references the secret and passes that value to the template.

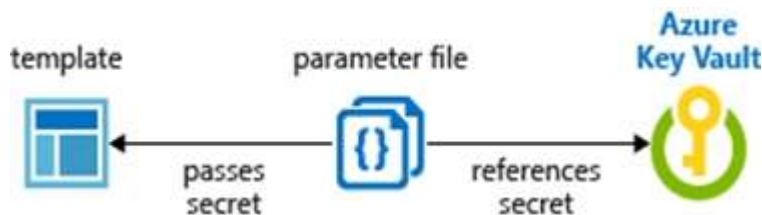

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-manager-keyvault-parameter>

QUESTION 24

HOTSPOT

You create a new Azure subscription that is associated to a new Azure Active Directory (Azure AD) tenant.

You create one active conditional access policy named Portal Policy. Portal Policy is used to provide access to the Microsoft Azure Management cloud app.

The Conditions settings for Portal Policy are configured as shown in the Conditions exhibit. (Click the **Conditions** tab.)

Portal Policy [X] [Info] [Delete]

* Name
Portal Policy

Assignments

Users and groups ⓘ
All users

Cloud apps ⓘ
1 app included

Conditions ⓘ
1 condition selected

Access controls

Grant ⓘ
2 controls selected

Session ⓘ
0 controls selected

Conditions [X] [Info]

Device platforms ⓘ
Not configured

Locations ⓘ
1 included

Client apps (preview) ⓘ
Not configured

Device state (preview) ⓘ
Not configured

Locations [X]

Control user access based on their physical location. [Learn more](#)

Configure ⓘ
Yes No

Include Exclude

☐ Any location
☐ All trusted locations
☒ Selected locations

Select
Contoso
Contoso ...

The Grant settings for Portal Policy are configured as shown in the Grant exhibit. (Click the **Grant** tab.)

Portal Policy [X] [Info] [Delete]

* Name
Portal Policy

Assignments

Users and groups ⓘ
All users

Cloud apps ⓘ
1 app included

Conditions ⓘ
1 condition selected

Access controls

Grant ⓘ
2 controls selected

Session ⓘ
0 controls selected

Grant [X]

Select the controls to be enforced.

☐ Block access
☒ Grant access

☒ Require multi-factor authentication ⓘ
☐ Require device to be marked as compliant ⓘ
☐ Require Hybrid Azure AD joined device ⓘ
☒ Require approved client app ⓘ
[See list of approved client apps](#)

For multiple controls

☐ Require all the selected controls
☒ Require one of the selected controls

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer area

Statements	Yes	No
Users from the Contoso named location must use multi-factor authentication (MFA) to access the Azure portal.	☐	☐
Users from the Contoso named location must use multi-factor authentication (MFA) to access the web services hosted in the Azure subscription.	☐	☐
Users external to the Contoso named location must use multi-factor authentication (MFA) to access the Azure portal.	☐	☐

Correct Answer:

Answer area

Statements	Yes	No
Users from the Contoso named location must use multi-factor authentication (MFA) to access the Azure portal.	☐	☒
Users from the Contoso named location must use multi-factor authentication (MFA) to access the web services hosted in the Azure subscription.	☒	☐
Users external to the Contoso named location must use multi-factor authentication (MFA) to access the Azure portal.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: No

The Contoso location is excluded

Box 2: Yes

Box 3: Yes

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/location-condition>

QUESTION 25

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant that contains the users shown in the following table.

Name	Member of	Multi-factor authentication (MFA) status
User1	Group1, Group2	Disabled
User2	Group2	Disabled

The tenant contains the named locations shown in the following table.

Name	IP address range	Trusted location
Seattle	193.77.10.0/24	Yes
Boston	154.12.18.0/24	No

You create the conditional access policies for a cloud app named App1 as shown in the following table.

Name	Include	Exclude	Condition	Grant
Policy1	Group1	Group2	Locations: Boston	Block access
Policy2	Group1	None	Locations: Any location	Grant access, Require multi-factor authentication
Policy3	Group2	Group1	Locations: Boston	Block access
Policy4	User2	None	Locations: Any location	Grant access, Require multi-factor authentication

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can access App1 from an IP address of 154.12.18.10.	☐	☐
User2 can access App1 from an IP address of 193.77.10.15.	☐	☐
User2 can access App1 from an IP address of 154.12.18.34.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
User1 can access App1 from an IP address of 154.12.18.10.	☐	☒
User2 can access App1 from an IP address of 193.77.10.15.	☒	☐
User2 can access App1 from an IP address of 154.12.18.34.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

QUESTION 26

HOTSPOT

You have an Azure subscription named Sub 1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Role
User1	Global administrator
User2	Security administrator
User3	Security reader
User4	License administrator

Each user is assigned an Azure AD Premium P2 license.

You plan to onboard and configure Azure AD Identity Protection.

Which users can onboard Azure AD Identity Protection, remediate users, and configure policies? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Users who can onboard Azure AD Identity Protection:

	▼
User1 only	
User1 and User2 only	
User1,User2, and User3 only	
User1,User2, User3, and User4 only	

Users who can remediate users and configure policies:

	▼
User1 and User2 only	
User1 and User3 only	
User1, User2, and User3 only	
User1, User2, User3, and User4	

Correct Answer:

Answer Area

Users who can onboard Azure AD Identity Protection:

	▼
User1 only	
User1 and User2 only	
User1,User2, and User3 only	
User1,User2, User3, and User4 only	

Users who can remediate users and configure policies:

	▼
User1 and User2 only	
User1 and User3 only	
User1, User2, and User3 only	
User1, User2, User3, and User4	

Section: (none)

Explanation

Explanation/Reference:

QUESTION 27

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant that contains the users shown in the following table.

Name	Member of
User1	Group1
User2	Group2
User3	Group1, Group2

From Azure AD Privileged Identity Management (PIM), you configure the settings for the Security Administrator role as shown in the following exhibit.

Settings



Assignment

☒ Allow permanent eligible assignment

Expire eligible assignments after

3 Months

☒ Allow permanent active assignment

Expire active assignments after

1 Month

☐ Require Azure Multi-Factor Authentication on active assignment

☒ Require justification on active assignment

Activation

Activation maximum duration (hours)



5

☐ Require Azure Multi-Factor Authentication on activation

☐ Require justification on activation

☐ Require ticket information on activation

☐ Require approval to activate

Select approvers

No member or group selected



From PIM, you assign the Security Administrator role to the following groups:

- Group1: Active assignment type, permanently assigned
- Group2: Eligible assignment type, permanently eligible

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can only activate the Security Administrator role in five hours.	☐	☐
If User2 activates the Security Administrator role, the user will be assigned the role immediately.	☐	☐
User3 can activate the Security Administrator role.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
User1 can only activate the Security Administrator role in five hours.	☒	☐
If User2 activates the Security Administrator role, the user will be assigned the role immediately.	☒	☐
User3 can activate the Security Administrator role.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Yes

Eligible Type: A role assignment that requires a user to perform one or more actions to use the role. If a user has been made eligible for a role, that means they can activate the role when they need to perform privileged tasks. There's no difference in the access given to someone with a permanent versus an eligible role assignment. The only difference is that some people don't need that access all the time.

You can choose from two assignment duration options for each assignment type (eligible and active) when you configure settings for a role. These options become the default maximum duration when a user is assigned to the role in Privileged Identity Management.

Use the Activation maximum duration slider to set the maximum time, in hours, that a role stays active before it expires. This value can be from one to 24 hours.

Box 2: Yes

Active Type: A role assignment that doesn't require a user to perform any action to use the role. Users assigned as active have the privileges assigned to the role

Box 3: Yes

User3 is member of Group2.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/privileged-identity-management/pim-configure>

<https://docs.microsoft.com/bs-cyrl-ba/azure/active-directory/privileged-identity-management/pim-resource-roles-configure-role-settings>

QUESTION 28

HOTSPOT

Your company has an Azure subscription named Subscription1 that contains the users shown in the following table.

Name	Role
User1	Global administrator
User2	Billing administrator
User3	Owner
User4	Account Admin

The company is sold to a new owner.

The company needs to transfer ownership of Subscription1.

Which user can transfer the ownership and which tool should the user use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User:

	▼
User1	
User2	
User3	
User4	

Tool:

	▼
Azure Account Center	
Azure Cloud Shell	
Azure PowerShell	
Azure Security Center	

Correct Answer:

Answer Area

User:

	▼
User1	
User2	
User3	
User4	

Tool:

	▼
Azure Account Center	
Azure Cloud Shell	
Azure PowerShell	
Azure Security Center	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1; User2
Billing Administrator

Select Transfer billing ownership for the subscription that you want to transfer.
Enter the email address of a user who's a billing administrator of the account that will be the new owner for the subscription.

Box 2: Azure Account Center
Azure Account Center can be used.

Reference:

<https://docs.microsoft.com/en-us/azure/billing/billing-subscription-transfer#transfer-billing-ownership-of-an-azure-subscription>

QUESTION 29 SIMULATION

The developers at your company plan to create a web app named App10598168 and to publish the app to <https://www.contoso.com>.

You need to perform the following tasks:

- Ensure that App10598168 is registered to Azure Active Directory (Azure AD).
- Generate a password for App10598168.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Register the Application

1. Sign in to your Azure Account through the Azure portal.
2. Select Azure Active Directory.
3. Select App registrations.
4. Select New registration.
5. Name the application App10598168 . Select a supported account type, which determines who can use the application. Under Redirect URI, select Web for the type of application you want to create. Enter the URI: <https://www.contoso.com> , where the access token is sent to.

Dashboard > Microsoft - App registrations > Register an application

Register an application

If you are building an application for external users that will be distributed by Microsoft, you must register as a first party application to meet all security, privacy, and compliance policies. [Read our decision guide](#)

*** Name**

The user-facing display name for this application (this can be changed later).

example-app ✓

Supported account types

Who can use this application or access this API?

☒ Accounts in this organizational directory only (Microsoft)

☐ Accounts in any organizational directory

☐ Accounts in any organizational directory and personal Microsoft accounts (e.g. Skype, Xbox, Outlook.com)

[Help me choose...](#)

Redirect URI (optional)

We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.

Web ▼ https://contoso.org/exampleapp ✓

By proceeding, you agree to the [Microsoft Platform Policies](#)

Register

6. Click Register

Step 2: Create a new application secret

If you choose not to use a certificate, you can create a new application secret.

- 7 Select Certificates & secrets.
8. Select Client secrets -> New client secret.
9. Provide a description of the secret, and a duration. When done, select Add.

After saving the client secret, the value of the client secret is displayed. Copy this value because you aren't able to retrieve the key later. You provide the key value with the application ID to sign in as the application. Store the key value where your application can retrieve it.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/howto-create-service-principal-portal>

QUESTION 30

SIMULATION

You need to create a new Azure Active Directory (Azure AD) directory named 11641655.onmicrosoft.com and a user named User1 in the new directory. The solution must ensure that User1 is enabled for Azure Multi-Factor Authentication (MFA).

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)


Explanation

Explanation/Reference:

Explanation:

Step 1: Create an Azure Active Directory tenant

1. Browse to the Azure portal and sign in with an account that has an Azure subscription.
2. Select the plus icon (+) and search for Azure Active Directory.

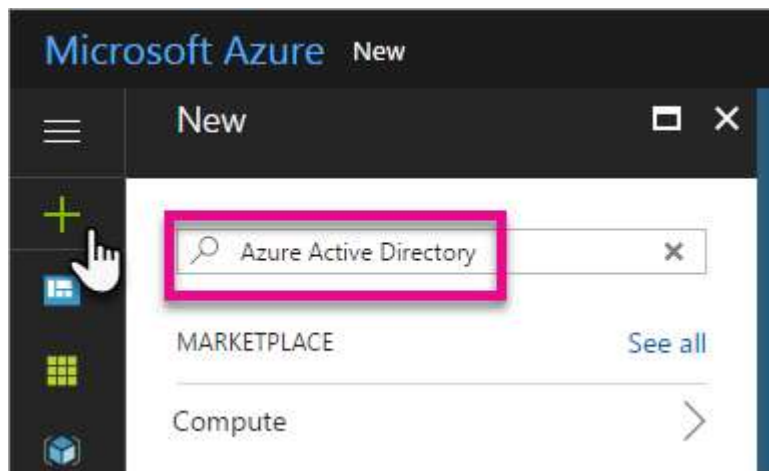

3. Select Azure Active Directory in the search results.




4. Select Create.

5. Provide an Organization name and an Initial domain name (10598168). Then select Create. Your directory is created.


6. After directory creation is complete, select the information box to manage your new directory. Next, you're going to add tenant users.

Step 2: Create an Azure Active Directory tenant user

7. In the Azure portal, make sure you are on the Azure Active Directory fly out.

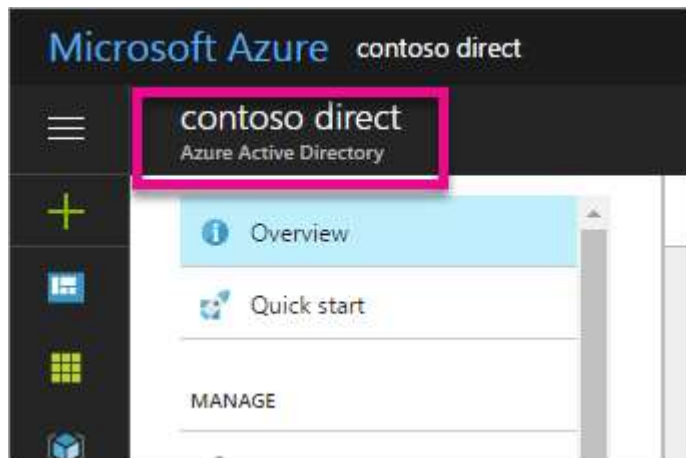

8. Under Manage, select Users.

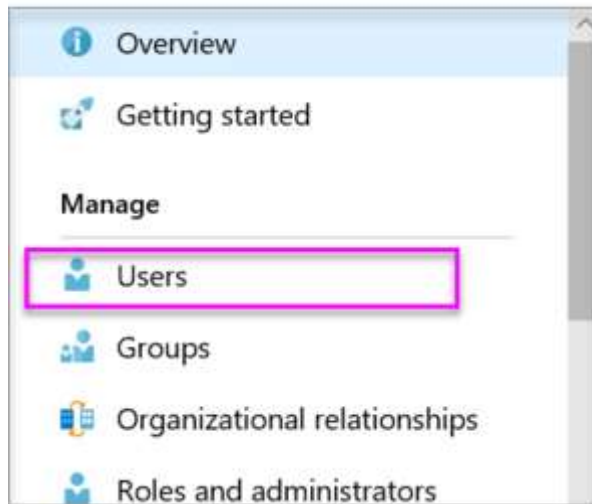

9. Select All users and then select + New user.

10. Provide a Name and User name (user1) for the regular user tenant. You can also show the temporary password. When you're done, select Create.

Name: user1

User name: user1@11641655.onmicrosoft.com

User
contoso direct

* Name ⓘ
PBI Embed ✓

* User name ⓘ
pbiembed@contosodirect.onmicrosoft.com ✓

Profile ⓘ
Not configured >

Properties ⓘ
Default >

Groups ⓘ
0 groups selected >

Directory role ⓘ
User >

Password
[Redacted]
☐ Show Password

Reference:

<https://docs.microsoft.com/en-us/power-bi/developer/create-an-azure-active-directory-tenant>

QUESTION 31 HOTSPOT

You have an Azure Active Directory (Azure AD) tenant that contains the users shown in the following table.

Name	Member of	Multi-factor authentication (MFA) status
User1	Group1, Group2	Enabled
User2	Group1	Disabled
User3	Group1	Disabled

You create and enforce an Azure AD Identity Protection sign-in risk policy that has the following settings:

- Assignments: Include Group1, exclude Group2
- Conditions: Sign-in risk level: Medium and above
- Access Allow access, Require multi-factor authentication

You need to identify what occurs when the users sign in to Azure AD.

What should you identify for each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

When User1 signs in from an anonymous IP address, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

When User2 signs in from an unfamiliar location, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

When User3 signs in from an infected device, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

Correct Answer:

Answer Area

When User1 signs in from an anonymous IP address, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

When User2 signs in from an unfamiliar location, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

When User3 signs in from an infected device, the user will:

	▼
Be blocked	
Be prompted for MFA	
Sign in by using a username and password only	

Section: (none)

Explanation

Explanation/Reference:

References:

<http://www.rebeladmin.com/2018/09/step-step-guide-configure-risk-based-azure-conditional-access-policies/>

<https://docs.microsoft.com/en-us/azure/active-directory/identity-protection/concept-identity-protection-policies>

QUESTION 32
HOTSPOT

You have an Azure Active Directory (Azure AD) tenant that contains the users shown in the following table.

Name	Multi-factor authentication (MFA) status
User1	Disabled
User2	Disabled
User3	Enforced

In Azure AD Privileged Identity Management (PIM), the Role settings for the Contributor role are configured as shown in the exhibit. (Click the **Exhibit** tab.)

Role settings □ ×

Assignment

☐ Allow permanent eligible assignment

Expire eligible assignments after

3 Months ▾

☐ Allow permanent active assignment

Expire active assignments after

1 Month ▾

☒ Require Multi-Factor Authentication on active assignment

☒ Require justification on active assignment

Activation

Activation maximum duration (hours)

8

☒ Require Multi-Factor Authentication on activation

☒ Require justification on activation

☐ Require ticket information on activation

☐ Require approval to activate

Select approvers

No member or group selected >

You assign users the Contributor role on May 1, 2019 as shown in the following table.

Name	Assignment type
User1	Eligible
User2	Active
User3	Active

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On May 15, 2019, User1 can activate the Contributor role.	☐	☐
On May 15, 2019, User2 can use the Contributor role.	☐	☐
On June 15, 2019, User3 can activate the Contributor role.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
On May 15, 2019, User1 can activate the Contributor role.	☒	☐
On May 15, 2019, User2 can use the Contributor role.	☒	☐
On June 15, 2019, User3 can activate the Contributor role.	☒	☐

Section: (none)
Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/active-directory/privileged-identity-management/pim-resource-roles-assign-roles>

QUESTION 33**HOTSPOT**

You work at a company named Contoso, Ltd. that has the offices shown in the following table.

Name	IP address space
Boston	180.15.10.0/24
Seattle	132.32.15.0/24

Contoso has an Azure Active Directory (Azure AD) tenant named contoso.com. All contoso.com users have Azure Multi-Factor Authentication (MFA) enabled. The tenant contains the users shown in the following table.

Name	User device	Last sign-in	During last sign-in, user selected Don't ask again for 14 days
User1	Device1	June 1	Yes
User2	Device2	June 3	No

The multi-factor settings for contoso.com are configured as shown in the following exhibit.

multi-factor authentication

users service settings

app passwords [\(learn more\)](#)

- ☒ Allow users to create app passwords to sign in to non-browser apps
- ☐ Do not allow users to create app passwords to sign in to non-browser apps

trusted ips [\(learn more\)](#)

- ☐ Skip multi-factor authentication for requests from federated users on my intranet
- Skip multi-factor authentication for requests from following range of IP address subnets

180.15.10.0/24

verification options [\(learn more\)](#)

* Methods available to users:

- ☐ call to phone
- ☒ Text message to phone
- ☒ Notification through mobile app
- ☒ Verification code from mobile app or hardware token

remember multi-factor authentication [\(learn more\)](#)

- ☒ Allow users to remember multi-factor authentication on devices they trust
- Days before a device must re-authenticate (1-60):

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
When User1 signs in to Device1 from the Seattle office on June 10, the user will be prompted for MFA.	☐	☐
When User2 signs in to Device2 from the Boston office on June 5, the user will be prompted for MFA.	☐	☐
When User1 signs in to a new device from the Seattle office on June 7, the user will be prompted for MFA.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
When User1 signs in to Device1 from the Seattle office on June 10, the user will be prompted for MFA.	☐	☒
When User2 signs in to Device2 from the Boston office on June 5, the user will be prompted for MFA.	☒	☐
When User1 signs in to a new device from the Seattle office on June 7, the user will be prompted for MFA.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

QUESTION 34

You have an Azure subscription.

You configure the subscription to use a different Azure Active Directory (Azure AD) tenant.

What are two possible effects of the change? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Role assignments at the subscription level are lost.
- B. Virtual machine managed identities are lost.
- C. Virtual machine disk snapshots are lost.
- D. Existing Azure resources are deleted.

Correct Answer: AB

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/active-directory-how-subscriptions-associated-directory>

QUESTION 35

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Sub1.

You have an Azure Storage account named sa1 in a resource group named RG1.

Users and applications access the blob service and the file service in sa1 by using several shared access signatures (SASs) and stored access policies.

You discover that unauthorized users accessed both the file service and the blob service.

You need to revoke all access to sa1.

Solution: You generate new SASs.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead you should create a new stored access policy.

To revoke a stored access policy, you can either delete it, or rename it by changing the signed identifier. Changing the signed identifier breaks the associations between any existing signatures and the stored access policy. Deleting or renaming the stored access policy immediately affects all of the shared access signatures associated with it.

References:

<https://docs.microsoft.com/en-us/rest/api/storageservices/Establishing-a-Stored-Access-Policy>

QUESTION 36

You have an Azure subscription that contains virtual machines.

You enable just in time (JIT) VM access to all the virtual machines.

You need to connect to a virtual machine by using Remote Desktop.

What should you do first?

- A. From Azure Directory (Azure AD) Privileged Identity Management (PIM), activate the Security administrator user role.

- B. From Azure Active Directory (Azure AD) Privileged Identity Management (PIM), activate the Owner role for the virtual machine.
- C. From the Azure portal, select the virtual machine, select **Connect**, and then select **Request access**.
- D. From the Azure portal, select the virtual machine and add the Network Watcher Agent virtual machine extension.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/connect-logon>

QUESTION 37

HOTSPOT

Your network contains an on-premises Active Directory domain that syncs to an Azure Active Directory (Azure AD) tenant. The tenant contains the users shown in the following table.

Name	Source
User1	Azure AD
User2	Azure AD
User3	On-premises Active Directory

The tenant contains the groups shown in the following table.

Name	Members
Group1	User1, User2, User3
Group2	User2

You configure a multi-factor authentication (MFA) registration policy that has the following settings:

- Assignments:
 - Include: Group1
 - Exclude Group2
- Controls: Require Azure MFA registration
- Enforce Policy: On

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 will be prompted to configure MFA registration during the user's next Azure AD authentication.	☐	☐
User2 must configure MFA during the user's next Azure AD authentication.	☐	☐
User3 will be prompted to configure MFA registration during the user's next Azure AD authentication.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
User1 will be prompted to configure MFA registration during the user's next Azure AD authentication.	☒	☐
User2 must configure MFA during the user's next Azure AD authentication.	☐	☒
User3 will be prompted to configure MFA registration during the user's next Azure AD authentication.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

QUESTION 38

SIMULATION

The developers at your company plan to publish an app named App11641655 to Azure.

You need to ensure that the app is registered to Azure Active Directory (Azure AD). The registration must use the sign-on URLs of https://app.contoso.com.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Register the Application

1. Sign in to your Azure Account through the Azure portal.

2. Select Azure Active Directory.
3. Select App registrations.
4. Select New registration.
5. Name the application App11641655. Select a supported account type, which determines who can use the application. Under Redirect URI, select Web for the type of application you want to create. Enter the URI: <https://app.contoso.com> , where the access token is sent to.

Dashboard > Microsoft - App registrations > Register an application

Register an application

 If you are building an application for external users that will be distributed by Microsoft, you must register as a first party application to meet all security, privacy, and compliance policies. [Read our decision guide](#)

*** Name**
The user-facing display name for this application (this can be changed later).

Supported account types
Who can use this application or access this API?

☒ Accounts in this organizational directory only (Microsoft)

☐ Accounts in any organizational directory

☐ Accounts in any organizational directory and personal Microsoft accounts (e.g. Skype, Xbox, Outlook.com)

[Help me choose...](#)

Redirect URI (optional)
We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.

[By proceeding, you agree to the Microsoft Platform Policies](#)

Register

6. Click Register

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/howto-create-service-principal-portal>

QUESTION 39

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com.

The User administrator role is assigned to a user named Admin1.

An external partner has a Microsoft account that uses the user1@outlook.com sign in.

Admin1 attempts to invite the external partner to sign in to the Azure AD tenant and receives the following error message: "Unable to invite user user1@outlook.com Generic authorization exception."

You need to ensure that Admin1 can invite the external partner to sign in to the Azure AD tenant.

What should you do?

- A. From the Roles and administrators blade, assign the Security administrator role to Admin1.
- B. From the Organizational relationships blade, add an identity provider.
- C. From the Custom domain names blade, add a custom domain.
- D. From the Users blade, modify the External collaboration settings.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to allow guest invitations in the External collaboration settings.

QUESTION 40

You have an Azure Active Directory (Azure AD) tenant.

You have the deleted objects shown in the following table.

Name	Type	Deleted on
Group1	Security group	April 5, 2020
Group2	Office 365 group	April 5, 2020
User1	User	March 25, 2020
User2	User	April 30, 2020

On May 4, 2020, you attempt to restore the deleted objects by using the Azure Active Directory admin center.

Which two objects can you restore? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Group1
- B. Group2
- C. User2
- D. User1

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Deleted users and deleted Office 365 groups are available for restore for 30 days.

You cannot restore a deleted security group.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/users-groups-roles/groups-restore-deleted>

QUESTION 41

HOTSPOT

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	In resource group
8372f433-2dcd-4361-b5ef-5b188fed87d0	Subscription ID	<i>Not applicable</i>
RG1	Resource group	<i>Not applicable</i>
VM1	Virtual machine	RG1
VNET1	Virtual network	RG1
storage	Storage account	RG1
User1	User account	<i>Not applicable</i>

You create an Azure role by using the following JSON file.

```
{
  "properties": {
    "roleName": "Role1",
    "description": "",
    "assignableScopes": [
      "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0",
      "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/RG1"
    ],
    "permissions": [
      {
        "actions": [
          "Microsoft.Compute/*"
        ],
        "notActions": [],
        "dataActions": [],
        "notDataActions": []
      }
    ]
  }
}
```

You assign Role1 to User1 for RG1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can create a new virtual machine in RG1.	☐	☐
User can modify the properties of storage1.	☐	☐
User1 can attach the network interface of VM1 to VNET1.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
User1 can create a new virtual machine in RG1.	☒	☐
User can modify the properties of storage1.	☐	☒
User1 can attach the network interface of VM1 to VNET1.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#compute>

QUESTION 42

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains a user named User1.

You plan to publish several apps in the tenant.

You need to ensure that User1 can grant admin consent for the published apps.

Which two possible user roles can you assign to User1 to achieve this goal? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Security administrator
- B. Cloud application administrator
- C. Application administrator
- D. User administrator
- E. Application developer

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/manage-apps/grant-admin-consent>

QUESTION 43

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant.

When a developer attempts to register an app named App1 in the tenant, the developer receives the error message shown in the following exhibit.

You do not have access



Access denied

You do not have access

You don't have permission to register applications in the sk200510outlook (Default Directory) directory. To request access, contact your administrator.

Summary 

Session ID	Resource ID
f8e55e67d10141b4bf0c7ac5115b3be7	Not available
Extension	Content
Microsoft_AAD_RegisteredApps	CreateApplicationBlade
Error code	
403	

You need to ensure that the developer can register App1 in the tenant.

What should you do for the tenant?

- A. Modify the Directory properties.
- B. Set Enable Security defaults to **Yes**.

- C. Configure the Consent and permissions settings for enterprise applications.
- D. Modify the User settings.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/active-directory-how-applications-are-added>

QUESTION 44

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant and a user named User1.

The App registrations settings for the tenant are configured as shown in the following exhibit.



You plan to deploy an app named App1.

You need to ensure that User1 can register App1 in Azure AD. The solution must use the principle of least privilege.

Which role should you assign to User1?

- A. App Configuration Data Owner for the subscription
- B. Managed Application Contributor for the subscription
- C. Cloud application administrator in Azure AD
- D. Application developer in Azure AD

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/roles/delegate-by-task>

QUESTION 45

You have the Azure virtual machines shown in the following table.

Name	Location	Connected to
VM1	West US 2	VNET1/Subnet1
VM2	West US 2	VNET1/Subnet1
VM3	West US 2	VNET1/Subnet2
VM4	East US	VNET2/Subnet3
VM5	West US 2	VNET5/Subnet5

Each virtual machine has a single network interface.

You add the network interface of VM1 to an application security group named ASG1.

You need to identify the network interfaces of which virtual machines you can add to ASG1.

What should you identify?

- A. VM2 only
- B. VM2 and VM3 only
- C. VM2, VM3, VM4, and VM5
- D. VM2, VM3, and VM5 only

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/application-security-groups>

QUESTION 46

SIMULATION

You need to create a new Azure Active Directory (Azure AD) directory named 10317806.onmicrosoft.com. The new directory must contain a user named user10317806 who is configured to sign in by using Azure Multi-Factor Authentication (MFA).

Correct Answer: See the explanation below.

Section: (none)


Explanation

Explanation/Reference:

Explanation:

To create a new Azure AD tenant:

1. Browse to the Azure portal and sign in with an account that has an Azure subscription.
2. Select the **plus icon (+)** and search for **Azure Active Directory**.

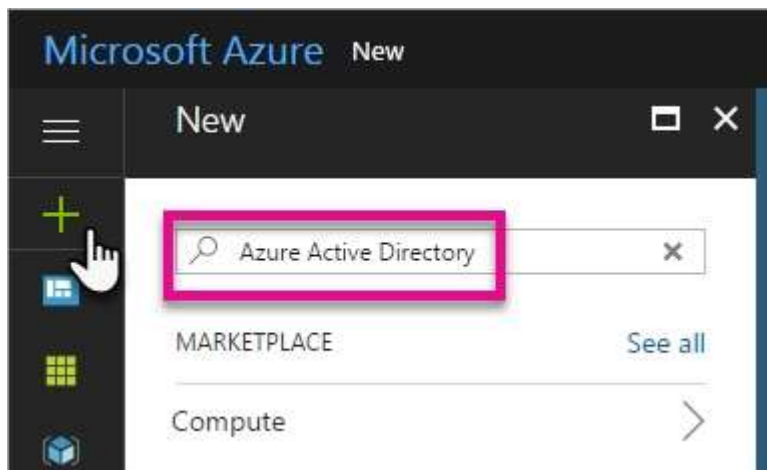

3. Select **Azure Active Directory** in the search results.




4. Select **Create**.

5. Provide an **Organization name** (10317806) and an **Initial domain name** (10317806). Then select **Create**. This will create the directory named 10317806.onmicrosoft.com.


6. After directory creation is complete, select the information box to manage your new directory.

To create the user:


1. In the Azure portal, make sure you are on the Azure Active Directory fly out.

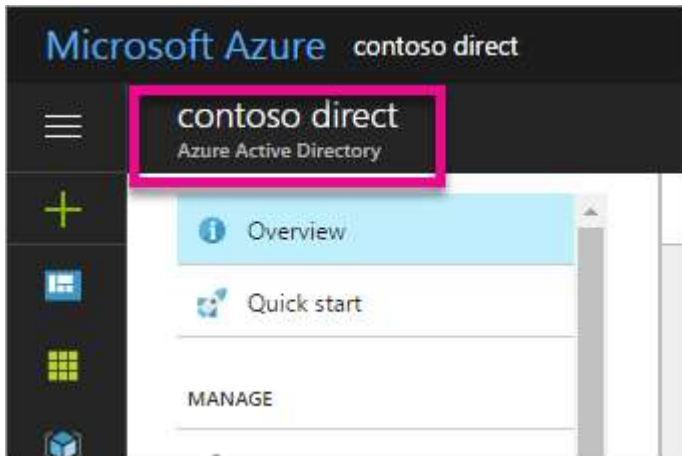

If not, select the Azure Active Directory icon from the left services navigation.

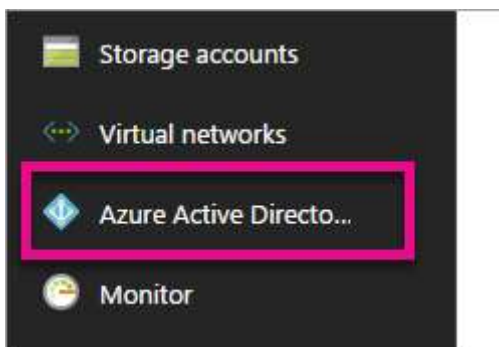

2. Under **Manage**, select **Users**.

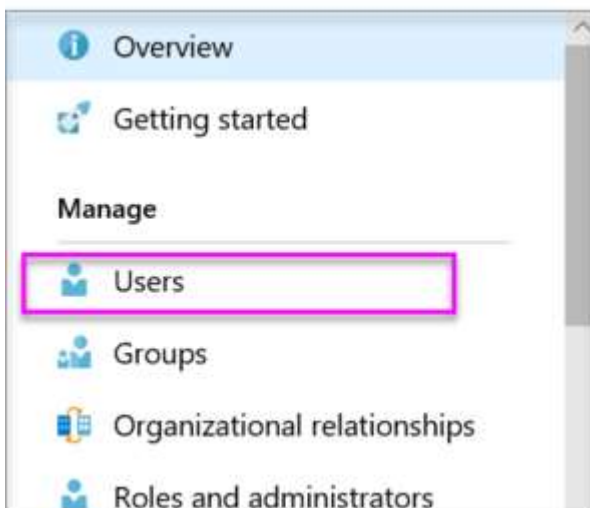


3. Select **All users** and then select **+ New user**.


4. Provide a **Name** and **User name** (user10317806) for the user. When you're done, select **Create**.

To enable MFA:


1. In the Azure portal, make sure you are on the Azure Active Directory fly out.

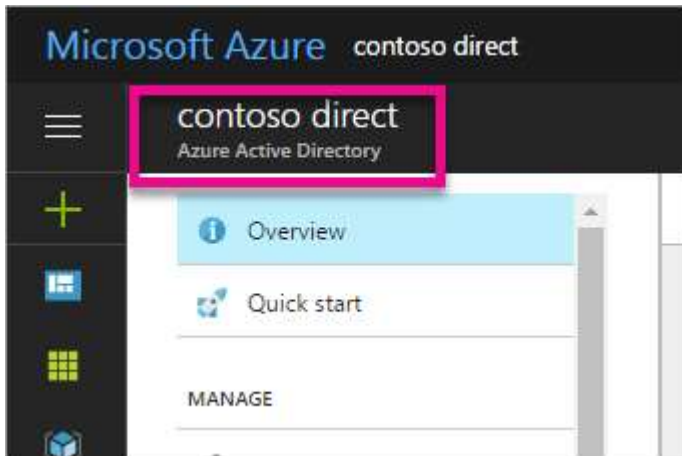

If not, select the Azure Active Directory icon from the left services navigation.

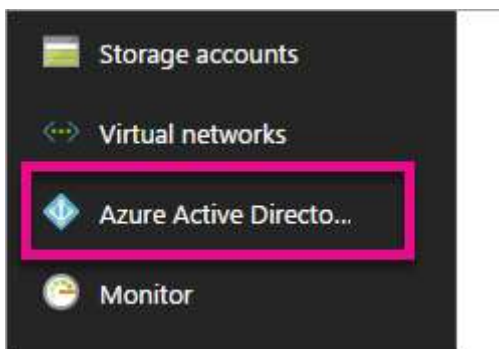

2. Under **Manage**, select **Users**.

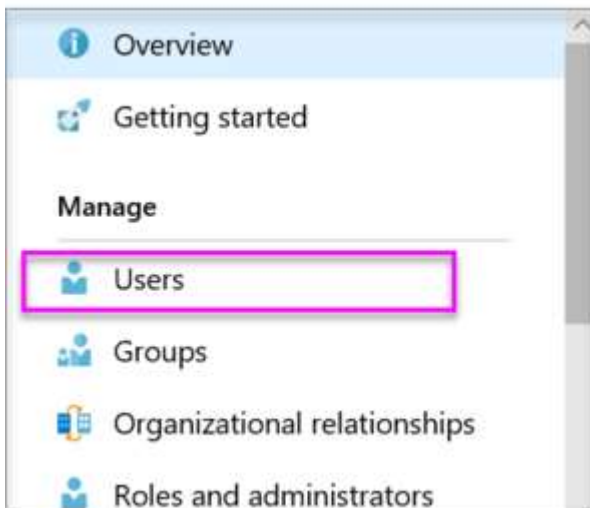

3. Click on the **Multi-Factor Authentication** link.

4. Tick the checkbox next to the user's name and click the **Enable** link.

Reference:

<https://docs.microsoft.com/en-us/power-bi/developer/create-an-azure-active-directory-tenant>

QUESTION 47

You have an Azure subscription named Subscription1 that contains an Azure Active Directory (Azure AD) tenant

named contoso.com and a resource group named RG1.

You create a custom role named Role1 for contoso.com.

You need to identify where you can use Role1 for permission delegation.

What should you identify?

- A. contoso.com only
- B. contoso.com and RG1 only
- C. contoso.com and Subscription1 only
- D. contoso.com, RG1, and Subscription1

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

QUESTION 48

You have an Azure subscription.

You enable Azure Active Directory (Azure AD) Privileged Identity Management (PIM).

Your company's security policy for administrator accounts has the following conditions:

- The accounts must use multi-factor authentication (MFA).
- The accounts must use 20-character complex passwords.
- The passwords must be changed every 180 days.
- The accounts must be managed by using PIM.

You receive multiple alerts about administrators who have not changed their password during the last 90 days.

You need to minimize the number of generated alerts.

Which PIM alert should you modify?

- A. Roles are being assigned outside of Privileged Identity Management
- B. Roles don't require multi-factor authentication for activation
- C. Administrators aren't using their privileged roles
- D. Potential stale accounts in a privileged role

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/privileged-identity-management/pim-how-to-configure-security-alerts?tabs=new>

Implement platform protection

Testlet 1

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://www.litwareinc.com and http://www.litwareinc.com.
RG1	Resource group	RG1 is a resource group that contains VNet1, VM0, and VM1.
RG2	Resource group	RG2 is a resource group that contains shared IT resources.

Identity and Access Requirements

Azure Security Center is set to the Standard tier.

Requirements

Planned Changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to RG2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- Microsoft Antimalware must be installed on the virtual machines in RG1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role.
- Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in RG1. Role1 must be available only for RG1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

Data and Application Requirements

Litware identifies the following data and applications requirements:

- The users in Group2 must be able to authenticate to SQLDB1 by using their Azure AD credentials.
- WebApp1 must enforce mutual authentication.

General Requirements

Litware identifies the following general requirements:

- Whenever possible, administrative effort must be minimized.
- Whenever possible, use of automation must be maximized.

QUESTION 1

DRAG DROP

You need to deploy AKS1 to meet the platform protection requirements.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Select and Place:

Actions	Answer Area
Deploy an AKS cluster.	
Create a client application.	
Create a server application.	
Create an RBAC binding.	
Create a custom RBAC role.	

Correct Answer:

Actions	Answer Area
	Create a server application.
	Create a client application.
	Deploy an AKS cluster.
	Create an RBAC binding.
Create a custom RBAC role.	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Scenario: Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.

Litware plans to deploy AKS1, which is a managed AKS (Azure Kubernetes Services) cluster.

Step 1: Create a server application

To provide Azure AD authentication for an AKS cluster, two Azure AD applications are created. The first application is a server component that provides user authentication.

Step 2: Create a client application

The second application is a client component that's used when you're prompted by the CLI for authentication. This client application uses the server application for the actual authentication of the credentials provided by the client.

Step 3: Deploy an AKS cluster.

Use the az group create command to create a resource group for the AKS cluster.

Use the az aks create command to deploy the AKS cluster.

Step 4: Create an RBAC binding.

Before you use an Azure Active Directory account with an AKS cluster, you must create role-binding or cluster role-binding. Roles define the permissions to grant, and bindings apply them to desired users. These assignments can be applied to a given namespace, or across the entire cluster.

Reference:

<https://docs.microsoft.com/en-us/azure/aks/azure-ad-integration>

QUESTION 2

You need to ensure that users can access VM0. The solution must meet the platform protection requirements.

What should you do?

A. Move VM0 to Subnet1.

- B. On Firewall, configure a network traffic filtering rule.
- C. Assign RT1 to AzureFirewallSubnet.
- D. On Firewall, configure a DNAT rule.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure Firewall has the following known issue:

Conflict with Azure Security Center (ASC) Just-in-Time (JIT) feature.

If a virtual machine is accessed using JIT, and is in a subnet with a user-defined route that points to Azure Firewall as a default gateway, ASC JIT doesn't work. This is a result of asymmetric routing – a packet comes in via the virtual machine public IP (JIT opened the access), but the return path is via the firewall, which drops the packet because there is no established session on the firewall.

Solution: To work around this issue, place the JIT virtual machines on a separate subnet that doesn't have a user-defined route to the firewall.

Scenario:

VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
-----	-----------------	--

Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.

References:

<https://docs.microsoft.com/en-us/azure/firewall/overview>

QUESTION 3

HOTSPOT

You need to deploy Microsoft Antimalware to meet the platform protection requirements.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Create a custom policy definition that has effect set to:

Append

Deny

DeployIfNotExists

Create a policy assignment and modify:

The Create a Managed Identity setting

The exclusion settings

The scope

Correct Answer:

Answer Area

Create a custom policy definition that has effect set to:

Append

Deny

DeployIfNotExists

Create a policy assignment and modify:

The Create a Managed Identity setting

The exclusion settings

The scope

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Scenario: Microsoft Antimalware must be installed on the virtual machines in RG1. RG1 is a resource group that contains Vnet1, VM0, and VM1.

Box 1: DeployIfNotExists

DeployIfNotExists executes a template deployment when the condition is met.

Azure policy definition Antimalware

Incorrect Answers:

Append:

Append is used to add additional fields to the requested resource during creation or update. A common example is adding tags on resources such as costCenter or specifying allowed IPs for a storage resource.

Deny:

Deny is used to prevent a resource request that doesn't match defined standards through a policy definition and fails the request.

Box 2: The Create a Managed Identity setting

When Azure Policy runs the template in the deployIfNotExists policy definition, it does so using a managed identity. Azure Policy creates a managed identity for each assignment, but must have details about what roles to grant the managed identity.

Reference:

<https://docs.microsoft.com/en-us/azure/governance/policy/concepts/effects>

Implement platform protection

Testlet 2

Case Study

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Contoso, Ltd. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The company hosts its entire server infrastructure in Azure.

Contoso has two Azure subscriptions named Sub1 and Sub2. Both subscriptions are associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

Existing Environment

Azure AD

Contoso.com contains the users shown in the following table.

Name	City	Role
User1	Montreal	Global administrator
User2	MONTREAL	Security administrator
User3	London	Privileged role administrator
User4	Ontario	Application administrator
User5	Seattle	Cloud application administrator
User6	Seattle	User administrator
User7	Sydney	Reports reader
User8	Sydney	None
User9	Sydney	Owner

Contoso.com contains the security groups shown in the following table.

Name	Membership type	Dynamic membership rule
Group1	Dynamic user	user.city -contains "ON"
Group2	Dynamic user	user.city -match "**on"

Sub1

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6.

User9 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

Sub1 contains the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Allowed resource types	networkSecurityGroups	RG4
Not allowed resource types	virtualNetworks/subnets	RG5
Not allowed resource types	networkSecurityGroups	RG5
Not allowed resource types	virtualNetworks/virtualNetworkPeerings	RG6

Sub2

Sub2 contains the virtual networks shown in the following table.

Name	Subnet
VNetwork1	Subnet11, Subnet12, and Subnet13
VNetwork2	Subnet21

Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet11
VM2	NIC2	ASG2	Subnet11
VM3	NIC3	<i>None</i>	Subnet12
VM4	NIC4	ASG1	Subnet13
VM5	NIC5	<i>None</i>	Subnet21

All virtual machines have public IP addresses and the Web Server (IIS) role installed. The firewalls for each virtual machine allow ping requests and web requests.

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet11
NSG3	Subnet13
NSG4	Subnet21

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG3 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	TCP	ASG1	ASG1	Allow
150	Any	Any	ASG2	VirtualNetwork	Allow
200	Any	Any	Any	Any	Deny
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG4 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	Any	Any	Any	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG1, NSG2, NSG3, and NSG4 have the outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	Any	Internet	Allow
65500	Any	Any	Any	Any	Deny

Technical requirements

Contoso identifies the following technical requirements:

- Deploy Azure Firewall to VNetwork1 in Sub2.
- Register an application named App2 in contoso.com.
- Whenever possible, use the principle of least privilege.
- Enable Azure AD Privileged Identity Management (PIM) for contoso.com.

QUESTION 1

HOTSPOT

What is the membership of Group1 and Group2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Group1:

	▼
No members	
Only User2	
Only User2 and User4	
User1, User2, User3, and User4	

Group2:

	▼
No members	
Only User3	
Only User1 and User3	
User1, User2, User3, and User4	

Correct Answer:

Answer Area

Group1:

	▼
No members	
Only User2	
Only User2 and User4	
User1, User2, User3, and User4	

Group2:

	▼
No members	
Only User3	
Only User1 and User3	
User1, User2, User3, and User4	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: User1, User2, User3, User4

Contains "ON" is true for Montreal (User1), MONTREAL (User2), London (User 3), and Ontario (User4) as string and regex operations are not case sensitive.

Box 2: Only User3

Match "*on" is only true for London (User3) as 'London' is the only word that ends with 'on'.

Scenario:

Contoso.com contains the users shown in the following table.

Name	City	Role
User1	Montreal	Global administrator
User2	MONTREAL	Security administrator
User3	London	Privileged role administrator
User4	Ontario	Application administrator
User5	Seattle	Cloud application administrator
User6	Seattle	User administrator
User7	Sydney	Reports reader
User8	Sydney	None

Contoso.com contains the security groups shown in the following table.

Name	Membership type	Dynamic membership rule
Group1	Dynamic user	user.city -contains "ON"
Group2	Dynamic user	user.city -match "*on"

References:

<https://docs.microsoft.com/en-us/azure/active-directory/users-groups-roles/groups-dynamic-membership>

QUESTION 2

HOTSPOT

You are evaluating the security of the network communication between the virtual machines in Sub2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From VM1, you can successfully ping the public IP address of VM2.	☐	☐
From VM1, you can successfully ping the private IP address of VM3.	☐	☐
From VM1, you can successfully ping the private IP address of VM5.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
From VM1, you can successfully ping the public IP address of VM2.	☒	☐
From VM1, you can successfully ping the private IP address of VM3.	☒	☐
From VM1, you can successfully ping the private IP address of VM5.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Yes. All traffic is allowed out to the Internet so you can ping the public IP.

NSG1, NSG2, NSG3, and NSG4 have the outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	Any	Internet	Allow
65500	Any	Any	Any	Any	Deny

Box 2: Yes. VM3 is on Subnet12. There is no NSG attached to Subnet12 so the traffic will be allowed by default.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet11
VM2	NIC2	ASG2	Subnet11
VM3	NIC3	<i>None</i>	Subnet12
VM4	NIC4	ASG1	Subnet13
VM5	NIC5	<i>None</i>	Subnet21

Name	Associated to
NSG1	NIC2
NSG2	Subnet11
NSG3	Subnet13
NSG4	Subnet21

Box 3: No (because VM5 is in a separate VNet).

Note: Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet11
VM2	NIC2	ASG2	Subnet11
VM3	NIC3	<i>None</i>	Subnet12
VM4	NIC4	ASG1	Subnet13
VM5	NIC5	<i>None</i>	Subnet21

Name	Subnet
VNetwork1	Subnet11, Subnet12, and Subnet13
VNetwork2	Subnet21

QUESTION 3

HOTSPOT

You are evaluating the effect of the application security groups on the network communication between the virtual machines in Sub2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer area

Statements	Yes	No
From VM1, you can successfully ping the private IP address of VM4.	☐	☐
From VM2, you can successfully ping the private IP address of VM4.	☐	☐
From VM1, you can connect to the web server on VM4.	☐	☐

Correct Answer:**Answer area**

Statements	Yes	No
From VM1, you can successfully ping the private IP address of VM4.	☐	☒
From VM2, you can successfully ping the private IP address of VM4.	☒	☐
From VM1, you can connect to the web server on VM4.	☒	☐

Section: (none)**Explanation****Explanation/Reference:**

Explanation:

Box 1: No. VM4 is in Subnet13 which has NSG3 attached to it.

VM1 is in ASG1. NSG3 would only allow ICMP pings from ASG2 but not ASG1. Only TCP traffic is allowed from ASG1.

NSG3 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	TCP	ASG1	ASG1	Allow
150	Any	Any	ASG2	VirtualNetwork	Allow
200	Any	Any	Any	Any	Deny
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

Box 2: Yes.

VM2 is in ASG2. Any protocol is allowed from ASG2 so ICMP ping would be allowed.

Box3. VM1 is in ASG1. TCP traffic is allowed from ASG1 so VM1 could connect to the web server as connections to the web server would be on ports TCP 80 or TCP 443.

QUESTION 4

You need to meet the technical requirements for VNetwork1.

What should you do first?

- A. Create a new subnet on VNetwork1.
- B. Remove the NSGs from Subnet11 and Subnet13.
- C. Associate an NSG to Subnet12.
- D. Configure DDoS protection for VNetwork1.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

From scenario: Deploy Azure Firewall to VNetwork1 in Sub2.

Azure firewall needs a dedicated subnet named AzureFirewallSubnet.

References:

<https://docs.microsoft.com/en-us/azure/firewall/tutorial-firewall-deploy-portal>

QUESTION 5

HOTSPOT

You are evaluating the security of VM1, VM2, and VM3 in Sub2.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer area

	Yes	No
From the Internet, you can connect to the web server on VM1 by using HTTP.	☐	☐
From the Internet, you can connect to the web server on VM2 by using HTTP.	☐	☐
From the Internet, you can connect to the web server on VM3 by using HTTP.	☐	☐

Correct Answer:

Answer area

	Yes	No
From the Internet, you can connect to the web server on VM1 by using HTTP.	☒	☐
From the Internet, you can connect to the web server on VM2 by using HTTP.	☐	☒
From the Internet, you can connect to the web server on VM3 by using HTTP.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

Explanation:

VM1: Yes. NSG2 applies to VM1 and this allows inbound traffic on port 80.

VM2: No. NSG2 and NSG1 apply to VM2. NSG2 allows the inbound traffic on port 80 but NSG1 does not allow it.

VM3: Yes. There are no NSGs applying to VM3 so all ports will be open.

Implement platform protection

Question Set 3

QUESTION 1

From Azure Security Center, you create a custom alert rule.

You need to configure which users will receive an email message when the alert is triggered.

What should you do?

- A. From Azure Monitor, create an action group.
- B. From Security Center, modify the Security policy settings of the Azure subscription.
- C. From Azure Active Directory (Azure AD), modify the members of the Security Reader role group.
- D. From Security Center, modify the alert rule.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/action-groups>

QUESTION 2

You are configuring and securing a network environment.

You deploy an Azure virtual machine named VM1 that is configured to analyze network traffic.

You need to ensure that all network traffic is routed through VM1.

What should you configure?

- A. a system route
- B. a network security group (NSG)
- C. a user-defined route

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Although the use of system routes facilitates traffic automatically for your deployment, there are cases in which you want to control the routing of packets through a virtual appliance. You can do so by creating user defined routes that specify the next hop for packets flowing to a specific subnet to go to your virtual appliance instead, and enabling IP forwarding for the VM running as the virtual appliance.

Note: User Defined Routes

For most environments you will only need the system routes already defined by Azure. However, you may need to create a route table and add one or more routes in specific cases, such as:

- Force tunneling to the Internet via your on-premises network.
- Use of virtual appliances in your Azure environment.
- In the scenarios above, you will have to create a route table and add user defined routes to it.

Reference:

<https://github.com/uqlide/azure-content/blob/master/articles/virtual-network/virtual-networks-udr-overview.md>

QUESTION 3

HOTSPOT

You have a network security group (NSG) bound to an Azure subnet.

You run `Get-AzNetworkSecurityRuleConfig` and receive the output shown in the following exhibit.

Name	: DenyStorageAccess
Description	:
Protocol	: *
SourcePortRange	: {*}
DestinationPortRange	: {*}
SourceAddressPrefix	: {*}
DestinationAddressPrefix	: {Storage}
SourceApplicationSecurityGroups	: []
DestinationApplicationSecurityGroups	: []
Access	: Deny
Priority	: 105
Direction	: Outbound
Name	: StorageEA2Allow
ProvisioningState	: Succeeded
Description	:
Protocol	: *
SourcePortRange	: {*}
DestinationPortRange	: {443}
SourceAddressPrefix	: {*}
DestinationAddressPrefix	: {Storage.EastUS2}
SourceApplicationSecurityGroups	: []
DestinationApplicationSecurityGroups	: []
Access	: Allow
Priority	: 104
Direction	: Outbound
Name	: Contoso_FTP
Description	:
Protocol	: TCP
SourcePortRange	: {*}
DestinationPortRange	: {21}
SourceAddressPrefix	: {1.2.3.4/32}
DestinationAddressPrefix	: {10.0.0.5/32}
SourceApplicationSecurityGroups	: []
DestinationApplicationSecurityGroups	: []
Access	: Allow
Priority	: 504
Direction	: Inbound

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Traffic destined for an Azure Storage account is [answer choice].

	▼
able to connect to East US	
able to connect to East US 2	
able to connect to West Europe	
prevented from connecting to all regions	

FTP connections from 1.2.3.4 to 10.0.0.10/32 are [answer choice].

	▼
allowed	
dropped	
forwarded	

Correct Answer:

Answer Area

Traffic destined for an Azure Storage account is [answer choice].

	▼
able to connect to East US	
able to connect to East US 2	
able to connect to West Europe	
prevented from connecting to all regions	

FTP connections from 1.2.3.4 to 10.0.0.10/32 are [answer choice].

	▼
allowed	
dropped	
forwarded	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: able to connect to East US 2

The StorageEA2Allow has DestinationAddressPrefix {Storage/EastUS2}

Box 2: allowed

TCP Port 21 controls the FTP session. Contoso_FTP has SourceAddressPrefix {1.2.3.4/32} and DestinationAddressPrefix {10.0.0.5/32}

Note:

The Get-AzureRmNetworkSecurityRuleConfig cmdlet gets a network security rule configuration for an Azure network security group.

Security rules in network security groups enable you to filter the type of network traffic that can flow in and out of virtual network subnets and network interfaces.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group>

QUESTION 4

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Region	Subnet
VNET1	West US	Subnet11 and Subnet12
VNET2	West US 2	Subnet21
VNET3	East US	Subnet31

The subscription contains the virtual machines shown in the following table.

Name	Network interface	Connected to
VM1	NIC1	Subnet11
VM2	NIC2	Subnet11
VM3	NIC3	Subnet12
VM4	NIC4	Subnet21
VM5	NIC5	Subnet31

On NIC1, you configure an application security group named ASG1.

On which other network interfaces can you configure ASG1?

- A. NIC2 only
- B. NIC2, NIC3, NIC4, and NIC5
- C. NIC2 and NIC3 only
- D. NIC2, NIC3, and NIC4 only

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Only network interfaces in VNET1, which consists of Subnet11 and Subnet12, can be configured in ASG1, as all network interfaces assigned to an application security group have to exist in the same virtual network that the first network interface assigned to the application security group is in.

Reference:

<https://azure.microsoft.com/es-es/blog/applicationsecuritygroups/>

QUESTION 5

You have 15 Azure virtual machines in a resource group named RG1.

All the virtual machines run identical applications.

You need to prevent unauthorized applications and malware from running on the virtual machines.

What should you do?

- A. Apply an Azure policy to RG1.
- B. From Azure Security Center, configure adaptive application controls.

- C. Configure Azure Active Directory (Azure AD) Identity Protection.
- D. Apply a resource lock to RG1.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Adaptive application control is an intelligent, automated end-to-end application whitelisting solution from Azure Security Center. It helps you control which applications can run on your Azure and non-Azure VMs (Windows and Linux), which, among other benefits, helps harden your VMs against malware. Security Center uses machine learning to analyze the applications running on your VMs and helps you apply the specific whitelisting rules using this intelligence.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-adaptive-application>

QUESTION 6

You plan to deploy Azure container instances.

You have a containerized application that validates credit cards. The application is comprised of two containers: an application container and a validation container.

The application container is monitored by the validation container. The validation container performs security checks by making requests to the application container and waiting for responses after every transaction.

You need to ensure that the application container and the validation container are scheduled to be deployed together. The containers must communicate to each other only on ports that are not externally exposed.

What should you include in the deployment?

- A. application security groups
- B. network security groups (NSGs)
- C. management groups
- D. container groups

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure Container Instances supports the deployment of multiple containers onto a single host using a container group. A container group is useful when building an application sidecar for logging, monitoring, or any other configuration where a service needs a second attached process.

Reference:

<https://docs.microsoft.com/en-us/azure/container-instances/container-instances-container-groups>

QUESTION 7

DRAG DROP

You are configuring network connectivity for two Azure virtual networks named VNET1 and VNET2.

You need to implement VPN gateways for the virtual networks to meet the following requirements:

- VNET1 must have six site-to-site connections that use BGP.

- VNET2 must have 12 site-to-site connections that use BGP.
- Costs must be minimized.

Which VPN gateway SKU should you use for each virtual network? To answer, drag the appropriate SKUs to the correct networks. Each SKU may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

SKUs		Answer Area	
Basic	VpnGw1	VNET1:	
VpnGw2	VpnGw3	VNET2:	

Correct Answer:

SKUs		Answer Area	
Basic	VpnGw1	VNET1:	VpnGw1
VpnGw2	VpnGw3	VNET2:	VpnGw1

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-about-vpngateways#gwsku>

QUESTION 8

You are securing access to the resources in an Azure subscription.

A new company policy states that all the Azure virtual machines in the subscription must use managed disks.

You need to prevent users from creating virtual machines that use unmanaged disks.

What should you use?

- A. Azure Monitor
- B. Azure Policy
- C. Azure Security Center
- D. Azure Service Health

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 9

You have an Azure Kubernetes Service (AKS) cluster that will connect to an Azure Container Registry.

You need to use automatically generated service principal for the AKS cluster to authenticate to the Azure Container Registry.

What should you create?

- A. a secret in Azure Key Vault
- B. a role assignment
- C. an Azure Active Directory (Azure AD) user
- D. an Azure Active Directory (Azure AD) group

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/aks/kubernetes-service-principal>

QUESTION 10

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You use Azure Security Center for the centralized policy management of three Azure subscriptions.

You use several policy definitions to manage the security of the subscriptions.

You need to deploy the policy definitions as a group to all three subscriptions.

Solution: You create an initiative and an assignment that is scoped to a management group.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/governance/policy/overview>

QUESTION 11

You have the Azure virtual machines shown in the following table.

Name	Operating system	State
VM1	Windows Server 2012	Running
VM2	Windows Server 2012 R2	Running
VM3	Windows Server 2016	Stopped
VM4	Ubuntu Server 18.04 LTS	Running

For which virtual machine can you enable Update Management?

- A. VM2 and VM3 only
- B. VM2, VM3, and VM4 only
- C. VM1, VM2, and VM4 only
- D. VM1, VM2, VM3, and VM4
- E. VM1, VM2, and VM3 only

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/automation/automation-update-management?toc=%2Fazure%2Fautomation%2Ftoc.json>

QUESTION 12

DRAG DROP

You have an Azure subscription named Sub1.

You have an Azure Active Directory (Azure AD) group named Group1 that contains all the members of your IT team.

You need to ensure that the members of Group1 can stop, start, and restart the Azure virtual machines in Sub1. The solution must use the principle of least privilege.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Create a JSON file.

Run the Update-AzManagementGroup cmdlet.

Create an XML file.

Run the New-AzRoleDefinition cmdlet.

Run the New-AzRoleAssignment cmdlet.

Answer Area

Correct Answer:

Actions	Answer Area
	Create a JSON file.
Run the Update-AzManagementGroup cmdlet.	Run the New-AzRoleDefinition cmdlet.
Create an XML file.	Run the New-AzRoleAssignment cmdlet.

Section: (none)

Explanation

Explanation/Reference:

References:

<https://www.petri.com/cloud-security-create-custom-rbac-role-microsoft-azure>

QUESTION 13

DRAG DROP

You have an Azure subscription that contains the following resources:

- A virtual network named VNET1 that contains two subnets named Subnet1 and Subnet2.
- A virtual machine named VM1 that has only a private IP address and connects to Subnet1.

You need to ensure that Remote Desktop connections can be established to VM1 from the internet.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Configure a network security group (NSG).	
Create a network rule collection.	
Create a NAT rule collection.	
Create a new subnet.	
Deploy Azure Application Gateway.	
Deploy Azure Firewall.	

Correct Answer:

Actions	Answer Area
Configure a network security group (NSG).	Create a new subnet.
Create a network rule collection.	Deploy Azure Firewall.
	Create a NAT rule collection.
Deploy Azure Application Gateway.	

Section: (none)
Explanation

Explanation/Reference:

QUESTION 14

You have an Azure subscription that contains a user named User1 and an Azure Container Registry named ConReg1.

You enable content trust for ConReg1.

You need to ensure that User1 can create trusted images in ConReg1. The solution must use the principle of least privilege.

Which two roles should you assign to User1? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. AcrQuarantineReader
- B. Contributor
- C. AcrPush
- D. AcrImageSigner
- E. AcrQuarantineWriter

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/container-registry/container-registry-content-trust>

<https://docs.microsoft.com/en-us/azure/container-registry/container-registry-roles>

QUESTION 15

You have an Azure Container Registry named ConReg1 that contains a container image named image1.

You enable content trust for ConReg1.

After content trust is enabled, you push two images to ConReg1 as shown in the following table.

Name	Details
image2	Image was pushed with client content trust enabled.
image3	Image was pushed with client content trust disabled.

Which images are trusted images?

- A. image1 and image2 only
- B. image2 only
- C. image1, image2, and image3

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure Container Registry implements Docker's content trust model, enabling pushing and pulling of signed images.

To push a trusted image tag to your container registry, enable content trust and push the image with docker push.

To work with trusted images, both image publishers and consumers need to enable content trust for their Docker clients. As a publisher, you can sign the images you push to a content trust-enabled registry.

Reference:

<https://docs.microsoft.com/en-us/azure/container-registry/container-registry-content-trust>

QUESTION 16

SIMULATION

You need to configure Azure to allow RDP connections from the Internet to a virtual machine named VM1. The solution must minimize the attack surface of VM1.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To enable the RDP port in an NSG, follow these steps:

1. Sign in to the Azure portal.
2. In Virtual Machines, select VM1
3. In Settings, select Networking.
4. In Inbound port rules, check whether the port for RDP is set correctly. The following is an example of the configuration:

Priority: 300

Name: Port_3389

Port(Destination): 3389

Protocol: TCP

Source: Any

Destinations: Any

Action: Allow

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/troubleshooting/troubleshoot-rdp-nsg-problem>

QUESTION 17

SIMULATION

You need to add the network interface of a virtual machine named VM1 to an application security group named ASG1.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In the Search resources, services, and docs box at the top of the portal, begin typing the name of a virtual machine, VM1 that has a network interface that you want to add to, or remove from, an application security group.
2. When the name of your VM appears in the search results, select it.
3. Under SETTINGS, select Networking. Select Configure the application security groups, select the application security groups that you want to add the network interface to, or unselect the application security groups that you want to remove the network interface from, and then select Save.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

QUESTION 18

SIMULATION

You need to perform a full malware scan every Sunday at 02:00 on a virtual machine named VM1 by using Microsoft Antimalware for Virtual Machines.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Deploy the Microsoft Antimalware Extension using the Azure Portal for single VM deployment

1. In Azure Portal, go to the Azure VM1's blade, navigate to the Extensions section and press Add.

Dashboard > Virtual machines > devrgvm > devrg > devrgvm - Extensions

devrgvm - Extensions

Virtual machine

Search (Ctrl+*/*)

« + Add

Search to filter items...

NAME	↑↓	TYPE
CustomScriptExtension		Microsoft.Compute.CustomScriptEx
DependencyAgentWindows		Microsoft.Azure.Monitoring.Depend
enablevmaccess		Microsoft.Compute.VMAccessAgen
IaaS.Diagnostics		Microsoft.Azure.Diagnostics.IaaS
MicrosoftMonitoringAgent		Microsoft.EnterpriseCloud.Monitori
SiteRecovery-Windows		Microsoft.Azure.RecoveryServices.S

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Settings

Networking

Disks

Size

Security

Extensions

2. Select the Microsoft Antimalware extension and press Create.

3. Fill the "Install extension" form as desired and press OK.

Scheduled: Enable

Scan type: Full

Scan day: Sunday

Install extension



Excluded files and locations ⓘ

Excluded file extensions ⓘ

Excluded processes ⓘ

Real-time protection ⓘ

Enable

Disable

Run a scheduled scan ⓘ

Enable

Disable

Scan type ⓘ

Quick

Full

Scan day ⓘ

Saturday



Scan time ⓘ

120

OK

Reference:

<https://www.e-apostolidis.gr/microsoft/azure/azure-vm-antimalware-extension-management/>

QUESTION 19

SIMULATION

You need to prevent administrative users from accidentally deleting a virtual network named VNET1. The administrative users must be allowed to modify the settings of VNET1.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation


Explanation/Reference:

Explanation:


Locking prevents other users in your organization from accidentally deleting or modifying critical resources, such as Azure subscription, resource group, or resource.

Note: In Azure, the term resource refers to an entity managed by Azure. For example, virtual machines, virtual networks, and storage accounts are all referred to as Azure resources.

1. In the Settings blade for virtual network VNET, select Locks.

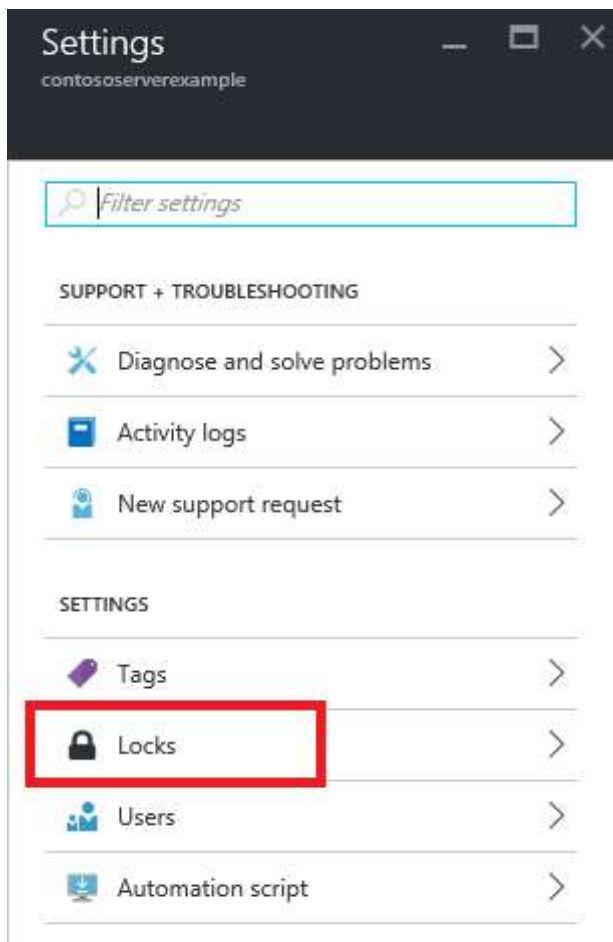

2. To add a lock, select Add.

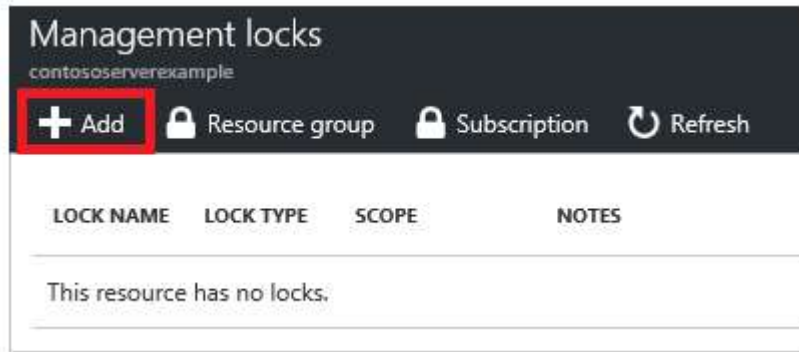

3. For Lock type select Delete lock, and click OK

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-lock-resources>

QUESTION 20

SIMULATION

You need to grant the required permissions to a user named User211641655 to manage the virtual networks in the RG1lod11641655 resource group. The solution must use the principle of least privilege.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.


Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In Azure portal, locate and select the RG1lod10598168 resource group.
2. Click Access control (IAM).
3. Click the Role assignments tab to view all the role assignments at this scope.
4. Click Add > Add role assignment to open the Add role assignment pane.

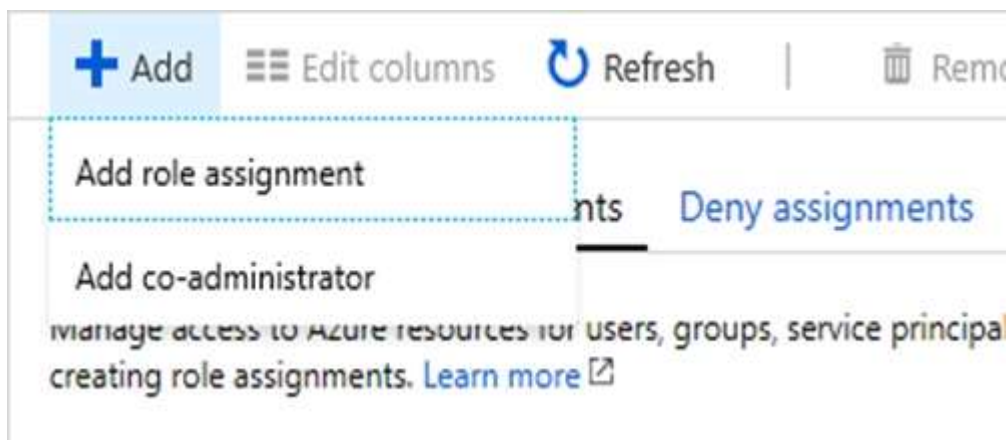

5. In the Role drop-down list, select the role Virtual Machine Contributor. Virtual Machine Contributor lets you manage virtual machines, but not access to them, and not the virtual network or storage account they're connected to.
6. In the Select list, select user user21059868
7. Click Save to assign the role.

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/role-assignments-portal>

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor>

QUESTION 21

SIMULATION

You need to ensure that only devices connected to a 131.107.0.0/16 subnet can access data in the rg1lod10598168 Azure Storage account.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1:

1. In Azure portal go to the storage account you want to secure. Here: rg1lod10598168
2. Click on the settings menu called Firewalls and virtual networks.
3. To deny access by default, choose to allow access from Selected networks. To allow traffic from all networks, choose to allow access from All networks.
4. Click Save to apply your changes.

Step 2:

1. Go to the storage account you want to secure. Here: rg1lod10598168
2. Click on the settings menu called Firewalls and virtual networks.
3. Check that you've selected to allow access from Selected networks.
4. To grant access to a virtual network with a new network rule, under Virtual networks, click Add existing virtual network, select Virtual networks and Subnets options. Enter the 131.107.0.0/16 subnet and then click Add.

Note: When network rules are configured, only applications requesting data over the specified set of networks can access a storage account. You can limit access to your storage account to requests originating from specified IP addresses, IP ranges or from a list of subnets in an Azure Virtual Network (VNet).

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security>

QUESTION 22

HOTSPOT

You create resources in an Azure subscription as shown in the following table.

Name	Type	Region
RG1	Resource group	West Europe
VNET1	Azure virtual network	West Europe
Contoso1901	Azure Storage account	West Europe

VNET1 contains two subnets named Subnet1 and Subnet2. Subnet1 has a network ID of 10.0.0.0/24. Subnet2 has a network ID of 10.1.1.0/24.

Contoso1901 is configured as shown in the exhibit. (Click the **Exhibit** tab.)

```

Administrator: Windows PowerShell

PS C:\> (Get-AzStorageAccount -ResourceGroupName RG1 -Name contoso1901).NetworkRuleSet

ByPass          : Logging, Metrics
DefaultAction    : Deny
IpRules          : [193.77.0.0/16,...]
VirtualNetworkRules : [/subscriptions/a90c8c8f-d8bc-4112-abfb-dac4906573dd/resourceGroups/RG1/providers/Microsoft.Network/virtualNetworks/VNET1/subnets/Subnet1,...]

PS C:\> (Get-AzStorageAccount -ResourceGroupName RG1 -Name contoso1901).NetworkRuleSet.
                                                    IpRules
Action  IPAddressOrRange
-----  -
Allow   193.77.0.0/16

PS C:\> (Get-AzStorageAccount -ResourceGroupName RG1 -Name contoso1901).NetworkRuleSet.
                                                    VirtualNetworkRules
Action  VirtualNetworkResourceId                               State
-----  -
Allow   /subscriptions/a90c8c8f-d8bc-4112-abfb-dac4906573dd/resourceGroups/RG1/providers/Microsoft.Network/virtualNetworks/VNET1/subnets/Subnet1 Succeeded

PS C:\> _

```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer area

Statements	Yes	No
An Azure virtual machine on Subnet1 can access data in Contoso1901.	☐	☐
An Azure virtual machine on Subnet2 can access data in Contoso1901.	☐	☐
A computer on the Internet that has an IP address of 193.77.10.2 can access data in Contoso1901.	☐	☐

Correct Answer:

Answer area

Statements	Yes	No
An Azure virtual machine on Subnet1 can access data in Contoso1901.	☒	☐
An Azure virtual machine on Subnet2 can access data in Contoso1901.	☐	☒
A computer on the Internet that has an IP address of 193.77.10.2 can access data in Contoso1901.	☒	☐

Section: (none)
Explanation

Explanation/Reference:

Explanation:

Box 1: Yes

Access from Subnet1 is allowed.

Box 2: No

No access from Subnet2 is allowed.

Box 3: Yes

Access from IP address 193.77.10.2 is allowed.

QUESTION 23

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You use Azure Security Center for the centralized policy management of three Azure subscriptions.

You use several policy definitions to manage the security of the subscriptions.

You need to deploy the policy definitions as a group to all three subscriptions.

Solution: You create a policy initiative and assignments that are scoped to resource groups.

Does this meet the goal?

A. Yes

B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Instead use a management group.

Management groups in Microsoft Azure solve the problem of needing to impose governance policy on more than one Azure subscription simultaneously.

Reference:

<https://4sysops.com/archives/apply-governance-policy-to-multiple-azure-subscriptions-with-management-groups/>

QUESTION 24

You have Azure Resource Manager templates that you use to deploy Azure virtual machines.

You need to disable unused Windows features automatically as instances of the virtual machines are provisioned.

What should you use?

A. device configuration policies in Microsoft Intune

B. Azure Automation State Configuration

- C. security policies in Azure Security Center
- D. device compliance policies in Microsoft Intune

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You can use Azure Automation State Configuration to manage Azure VMs (both Classic and Resource Manager), on-premises VMs, Linux machines, AWS VMs, and on-premises physical machines.

Note: Azure Automation State Configuration provides a DSC pull server similar to the Windows Feature DSC-Service so that target nodes automatically receive configurations, conform to the desired state, and report back on their compliance. The built-in pull server in Azure Automation eliminates the need to set up and maintain your own pull server. Azure Automation can target virtual or physical Windows or Linux machines, in the cloud or on-premises.

Reference:

<https://docs.microsoft.com/en-us/azure/automation/automation-dsc-getting-started>

QUESTION 25

You have an Azure subscription named Sub1. Sub1 contains a virtual network named VNet1 that contains one subnet named Subnet1.

Subnet1 contains an Azure virtual machine named VM1 that runs Ubuntu Server 18.04.

You create a service endpoint for MicrosoftStorage in Subnet1.

You need to ensure that when you deploy Docker containers to VM1, the containers can access Azure Storage resources by using the service endpoint.

What should you do on VM1 before you deploy the container?

- A. Create an application security group and a network security group (NSG).
- B. Edit the docker-compose.yml file.
- C. Install the container network interface (CNI) plug-in.

Correct Answer: C

Section: (none)

Explanation


Explanation/Reference:

Explanation:

The Azure Virtual Network container network interface (CNI) plug-in installs in an Azure Virtual Machine. The plug-in supports both Linux and Windows platform.

The plug-in assigns IP addresses from a virtual network to containers brought up in the virtual machine, attaching them to the virtual network, and connecting them directly to other containers and virtual network resources. The plug-in doesn't rely on overlay networks, or routes, for connectivity, and provides the same performance as virtual machines.

The following picture shows how the plug-in provides Azure Virtual Network capabilities to Pods:

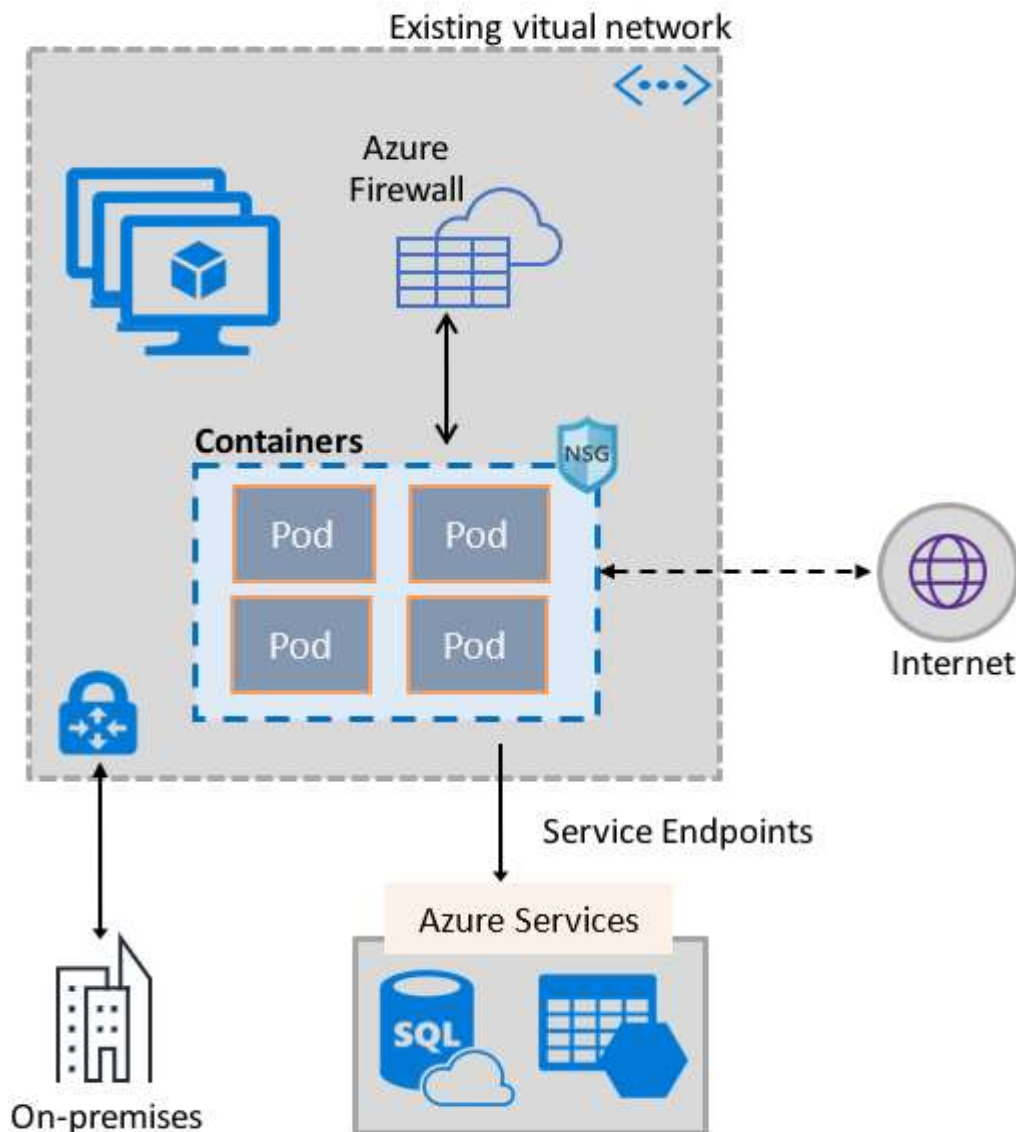

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/container-networking-overview>

QUESTION 26

You have Azure Resource Manager templates that you use to deploy Azure virtual machines.

You need to disable unused Windows features automatically as instances of the virtual machines are provisioned.

What should you use?

- A. device configuration policies in Microsoft Intune
- B. an Azure Desired State Configuration (DSC) virtual machine extension
- C. application security groups
- D. device compliance policies in Microsoft Intune

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The primary use case for the Azure Desired State Configuration (DSC) extension is to bootstrap a VM to the Azure Automation State Configuration (DSC) service. The service provides benefits that include ongoing management of the VM configuration and integration with other operational tools, such as Azure Monitoring. Using the extension to register VM's to the service provides a flexible solution that even works across Azure subscriptions.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview>

QUESTION 27

DRAG DROP

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Region	Description
HubVNet	East US	HubVNet is a virtual network connected to the on-premises network by using a site-to-site VPN that has BGP route propagation enabled. HubVNet contains subnets named HubVNetSubnet0 and GatewaySubnet. Virtual network gateway is connected to GatewaySubnet.
SpokeVNet	East US	SpokeVNet is a virtual network connected to HubVNet by using VNet peering. SpokeVNet contains subnets named SpokeVNetSubnet0 and AzureFirewallSubnet.

The Azure virtual machines on SpokeVNetSubnet0 can communicate with the computers on the on-premises network.

You plan to deploy an Azure firewall to HubVNet.

You create the following two routing tables:

- RT1: Includes a user-defined route that points to the private IP address of the Azure firewall as a next hop address
- RT2: Disables BGP route propagation and defines the private IP address of the Azure firewall as the default gateway

You need to ensure that traffic between SpokeVNetSubnet0 and the on-premises network flows through the Azure firewall.

To which subnet should you associate each route table? To answer, drag the appropriate subnets to the correct route tables. Each subnet may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Subnets	Answer Area
AzureFirewallSubnet	RT1:
GatewaySubnet	RT2:
SpokeVNetSubnet0	

Correct Answer:

Subnets	Answer Area
AzureFirewallSubnet	RT1: GatewaySubnet
GatewaySubnet	RT2: SpokeVNetSubnet0
SpokeVNetSubnet0	

Section: (none)
Explanation

Explanation/Reference:

QUESTION 28

HOTSPOT

You have an Azure subscription. The subscription contains Azure virtual machines that run Windows Server 2016.

You need to implement a policy to ensure that each virtual machine has a custom antimalware virtual machine extension installed.

How should you complete the policy? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "if" : {
    "allOf": [
      {
        "field" : "type",
        "equals": "Microsoft.Compute/virtualMachines"
      },
      {
        "field" : "Microsoft.Compute/imageSKU",
        "equals" : "2016-Datacenter",
      }
    ]
  },
  "then" : {
    "effect" : "
    

|                   |   |
|-------------------|---|
|                   | ▼ |
| Append            |   |
| Deny              |   |
| DeployIfNotExists |   |


    ",
    "details" : {
      "type" : "Microsoft.GuestConfiguration/guestConfigurationAssignments",
      "roleDefinitionsIds" : [
        "/providers/microsoft.authorization/roleDefinitions/12345678-1234-5678-abcd-012345678910"
      ],
      "name" : "customExtension",
      "deployment" : {
        "properties" : {
          "mode": "incremental",
          "parameters" : {
            "
            

|                    |   |
|--------------------|---|
|                    | ▼ |
| existenceCondition |   |
| resources          |   |
| template           |   |


            ": {
          }
        }
      }
    }
  }
}
```

Correct Answer:

Answer Area

```
{
  "if" : {
    "allOf": [
      {
        "field" : "type",
        "equals": "Microsoft.Compute/virtualMachines"
      },
      {
        "field" : "Microsoft.Compute/imagesSKU",
        "equals" : "2016-Datacenter",
      }
    ]
  },
  "then" : {
    "effect" : "
    

▼



Append



Deny



DeployIfNotExists


    ",
    "details" : {
      "type" : "Microsoft.GuestConfiguration/guestConfigurationAssignments",
      "roleDefinitionsIds" : [
        "/providers/microsoft.authorization/roleDefinitions/12345678-1234-5678-abcd-012345678910"
      ],
      "name" : "customExtension",
      "deployment" : {
        "properties" : {
          "mode": "incremental",
          "parameters" : {
            "
            

▼



existenceCondition



resources



template


            ": {
          }
        }
      }
    }
  }
}
```

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: DeployIfNotExists

DeployIfNotExists executes a template deployment when the condition is met.

Box 2: Template

The details property of the DeployIfNotExists effects has all the subproperties that define the related resources to match and the template deployment to execute.

Deployment [required]

This property should include the full template deployment as it would be passed to the Microsoft.Resources/deployment

References:

<https://docs.microsoft.com/en-us/azure/governance/policy/concepts/effects>

QUESTION 29

You are configuring an Azure Kubernetes Service (AKS) cluster that will connect to an Azure Container Registry.

You need to use the auto-generated service principal to authenticate to the Azure Container Registry.

What should you create?

- A. an Azure Active Directory (Azure AD) group
- B. an Azure Active Directory (Azure AD) role assignment
- C. an Azure Active Directory (Azure AD) user
- D. a secret in Azure Key Vault

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

When you create an AKS cluster, Azure also creates a service principal to support cluster operability with other Azure resources. You can use this auto-generated service principal for authentication with an ACR registry. To do so, you need to create an Azure AD role assignment that grants the cluster's service principal access to the container registry.

References:

<https://docs.microsoft.com/bs-latn-ba/azure/container-registry/container-registry-auth-aks>

QUESTION 30

You have an Azure subscription that contains the Azure virtual machines shown in the following table.

Name	Operating system
VM1	Windows 10
VM2	Windows Server 2016
VM3	Windows Server 2019
VM4	Ubuntu Server 18.04 LTS

You create an MDM Security Baseline profile named Profile1.

You need to identify to which virtual machines Profile1 can be applied.

Which virtual machines should you identify?

- A. VM1 only
- B. VM1, VM2, and VM3 only
- C. VM1 and VM3 only
- D. VM1, VM2, VM3, and VM4

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/mem/intune/protect/security-baselines>

QUESTION 31

SIMULATION

You need to ensure that connections from the Internet to VNET1\subnet0 are allowed only over TCP port 7777. The solution must use only currently deployed resources.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure the Network Security Group that is associated with subnet0.

1. In the Azure portal, type **Virtual Networks** in the search box, select **Virtual Networks** from the search results then select **VNET1**. Alternatively, browse to Virtual Networks in the left navigation pane.
2. In the properties of VNET1, click on **Subnets**. This will display the subnets in VNET1 and the **Network Security Group** associated to each subnet. Note the name of the Network Security Group associated to **Subnet0**.
3. Type **Network Security Groups** into the search box and select the Network Security Group associated with Subnet0.
4. In the properties of the Network Security Group, click on **Inbound Security Rules**.
5. Click the **Add** button to add a new rule.
6. In the **Source** field, select **Service Tag**.
7. In the **Source Service Tag** field, select **Internet**.
8. Leave the **Source port ranges** and **Destination** field as the default values (* and **All**).
9. In the **Destination port ranges** field, enter **7777**.
10. Change the **Protocol** to **TCP**.
11. Leave the **Action** option as **Allow**.
12. Change the **Priority** to **100**.
13. Change the **Name** from the default **Port_8080** to something more descriptive such as **Allow_TCP_7777_from_Internet**. The name cannot contain spaces.
14. Click the **Add** button to save the new rule.

QUESTION 32

SIMULATION

You need to prevent administrators from performing accidental changes to the Homepage app service plan.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure a 'lock' for the app service plan. A read-only lock ensures that no one can make changes to the app service plan without first deleting the lock.

1. In the Azure portal, type **App Service Plans** in the search box, select **App Service Plans** from the search results then select **Homepage**. Alternatively, browse to App Service Plans in the left navigation pane.
2. In the properties of the app service plan, click on **Locks**.
3. Click the **Add** button to add a new lock.
4. Enter a name in the **Lock name** field. It doesn't matter what name you provide for the exam.
5. For the **Lock type**, select **Read-only**.
6. Click **OK** to save the changes.

QUESTION 33

SIMULATION

You need to ensure that a user named Danny11597200 can sign in to any SQL database on a Microsoft SQL server named web11597200 by using SQL Server Management Studio (SSMS) and Azure Active Directory (Azure AD) credentials.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to provision an Azure AD Admin for the SQL Server.

1. In the Azure portal, type **SQL Server** in the search box, select **SQL Server** from the search results then select the server named web11597200. Alternatively, browse to SQL Server in the left navigation pane.
2. In the SQL Server properties page, click on **Active Directory Admin**.
3. Click the **Set Admin** button.
4. In the **Add Admin** window, search for and select Danny11597200.
5. Click the **Select** button to add Danny11597200.
6. Click the **Save** button to save the changes.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-sql/database/authentication-aad-configure?tabs=azure-powershell>

QUESTION 34

SIMULATION

You need to configure a Microsoft SQL server named Web11597200 only to accept connections from the Subnet0 subnet on the VNET01 virtual network.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to allow access to Azure services and configure a virtual network rule for the SQL Server.

1. In the Azure portal, type **SQL Server** in the search box, select **SQL Server** from the search results then select the server named web11597200. Alternatively, browse to SQL Server in the left navigation pane.
2. In the properties of the SQL Server, click **Firewalls and virtual networks**.
3. In the **Virtual networks** section, click on **Add existing**. This will open the **Create/Update virtual network rule** window.
4. Give the rule a name such as Allow_VNET01-Subnet0 (it doesn't matter what name you enter for the exam).
5. In the **Virtual network** box, select **VNET01**.
6. In the **Subnet name** box, select **Subnet0**.
7. Click the **OK** button to save the rule.
8. Back in the **Firewall / Virtual Networks** window, set the **Allow access to Azure services** option to **On**.

QUESTION 35

You have Azure Resource Manager templates that you use to deploy Azure virtual machines.

You need to disable unused Windows features automatically as instances of the virtual machines are provisioned.

What should you use?

- A. device configuration policies in Microsoft Intune
- B. an Azure Desired State Configuration (DSC) virtual machine extension
- C. security policies in Azure Security Center
- D. Azure Logic Apps

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The primary use case for the Azure Desired State Configuration (DSC) extension is to bootstrap a VM to the Azure Automation State Configuration (DSC) service. The service provides benefits that include ongoing management of the VM configuration and integration with other operational tools, such as Azure Monitoring. Using the extension to register VM's to the service provides a flexible solution that even works across Azure subscriptions.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/dsc-overview>

QUESTION 36

HOTSPOT

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Resource group	Status
VM1	RG1	Stopped (Deallocated)
VM2	RG2	Stopped (Deallocated)

You create the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Not allowed resource types	virtualMachines	RG1
Allowed resource types	virtualMachines	RG2

You create the resource locks shown in the following table.

Name	Type	Created on
Lock1	Read-only	VM1
Lock2	Read-only	RG2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can start VM1.	☐	☐
You can start VM2.	☐	☐
You can create a virtual machine in RG2.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
You can start VM1.	☐	☒
You can start VM2.	☒	☐
You can create a virtual machine in RG2.	☒	☐

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/governance/blueprints/concepts/resource-locking>

QUESTION 37

HOTSPOT

You have an Azure subscription that contains an Azure Active Directory (Azure AD) tenant named contoso.com. The tenant contains the users shown in the following table.

Name	Subscription role	Azure AD user role
User1	Owner	<i>None</i>
User2	Contributor	<i>None</i>
User3	Security Admin	<i>None</i>
User4	<i>None</i>	Service administrator

You create a resource group named RG1.

Which users can modify the permissions for RG1 and which users can create virtual networks in RG1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Users who can modify the permissions for RG1:

▼

☐ User1 only

☐ User1 and User2 only

☐ User1 and User3 only

☐ User1, User2 and User3 only

☐ User1, User2, User3, and User4

Users who can create virtual networks in RG1:

▼

☐ User1 only

☐ User1 and User2 only

☐ User1 and User3 only

☐ User1, User2 and User3 only

☐ User1, User2, User3, and User4

Correct Answer:

Answer Area

Users who can modify the permissions for RG1:

▼
User1 only
User1 and User2 only
User1 and User3 only
User1, User2 and User3 only
User1, User2, User3, and User4

Users who can create virtual networks in RG1:

▼
User1 only
User1 and User2 only
User1 and User3 only
User1, User2 and User3 only
User1, User2, User3, and User4

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Only an owner can change permissions on resources.

Box 2: A Contributor can create/modify/delete anything in the subscription but cannot change permissions.

QUESTION 38

SIMULATION

You need to configure network connectivity between a virtual network named VNET1 and a virtual network named VNET2. The solution must ensure that virtual machines connected to VNET1 can communicate with virtual machines connected to VNET2.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure VNet Peering between the two networks. The questions states, "The solution must ensure that virtual machines connected to VNET1 can communicate with virtual machines connected to VNET2". It doesn't say the VMs on VNET2 should be able to communicate with VMs on VNET1. Therefore, we need to configure the peering to allow just the one-way communication.

1. In the Azure portal, type **Virtual Networks** in the search box, select **Virtual Networks** from the search results then select **VNET1**. Alternatively, browse to **Virtual Networks** in the left navigation pane.
2. In the properties of **VNET1**, click on **Peerings**.
3. In the **Peerings** blade, click **Add** to add a new peering.
4. In the **Name of the peering from VNET1 to remote virtual network** box, enter a name such as **VNET1-VNET2** (this is the name that the peering will be displayed as in VNET1)
5. In the **Virtual Network** box, select **VNET2**.

6. In the **Name of the peering from remote virtual network to VNET1** box, enter a name such as **VNET2-VNET1** (this is the name that the peering will be displayed as in VNET2).

There is an option **Allow virtual network access from VNET to remote virtual network**. This should be left as **Enabled**.

7. For the option **Allow virtual network access from remote network to VNET1**, click the slider button to **Disabled**.

8. Click the **OK** button to save the changes.

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering>

QUESTION 39 SIMULATION

You need to deploy an Azure firewall to a virtual network named VNET3.

To complete this task, sign in to the Azure portal and modify the Azure resources.

This task might take several minutes to complete. You can perform other tasks while the task completes.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To add an Azure firewall to a VNET, the VNET must first be configured with a subnet named **AzureFirewallSubnet** (if it doesn't already exist).

Configure VNET3.

1. In the Azure portal, type **Virtual Networks** in the search box, select **Virtual Networks** from the search results then select **VNET3**. Alternatively, browse to **Virtual Networks** in the left navigation pane.
2. In the **Overview** section, note the **Location (region)** and **Resource Group** of the virtual network. We'll need these when we add the firewall.
3. Click on **Subnets**.
4. Click on **+ Subnet** to add a new subnet.
5. Enter **AzureFirewallSubnet** in the **Name** box. The subnet must be named **AzureFirewallSubnet**.
6. Enter an appropriate IP range for the subnet in the **Address range** box.
7. Click the **OK** button to create the subnet.

Add the Azure Firewall.

1. In the settings of **VNET3** click on **Firewall**.
2. Click the **Click here to add a new firewall** link.
3. The **Resource group** will default to the VNET3 resource group. Leave this default.
4. Enter a name for the firewall in the **Name** box.
5. In the **Region** box, select the same region as VNET3.
6. In the **Public IP address** box, select an available public IP address if one exists, or click **Add new** to add a new public IP address.
7. Click the **Review + create** button.
8. Review the settings and click the **Create** button to create the firewall.

Reference:

<https://docs.microsoft.com/en-us/azure/firewall/tutorial-firewall-deploy-portal>

QUESTION 40

SIMULATION

You need to configure a virtual network named VNET2 to meet the following requirements:

- Administrators must be prevented from deleting VNET2 accidentally.
- Administrators must be able to add subnets to VNET2 regularly.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:


Explanation:

Locking prevents other users in your organization from accidentally deleting or modifying critical resources, such as Azure subscription, resource group, or resource.


Note: In Azure, the term resource refers to an entity managed by Azure. For example, virtual machines, virtual networks, and storage accounts are all referred to as Azure resources.

1. In the Azure portal, type **Virtual Networks** in the search box, select **Virtual Networks** from the search results then select **VNET2**. Alternatively, browse to **Virtual Networks** in the left navigation pane.

2. In the Settings blade for virtual network VNET2, select **Locks**.

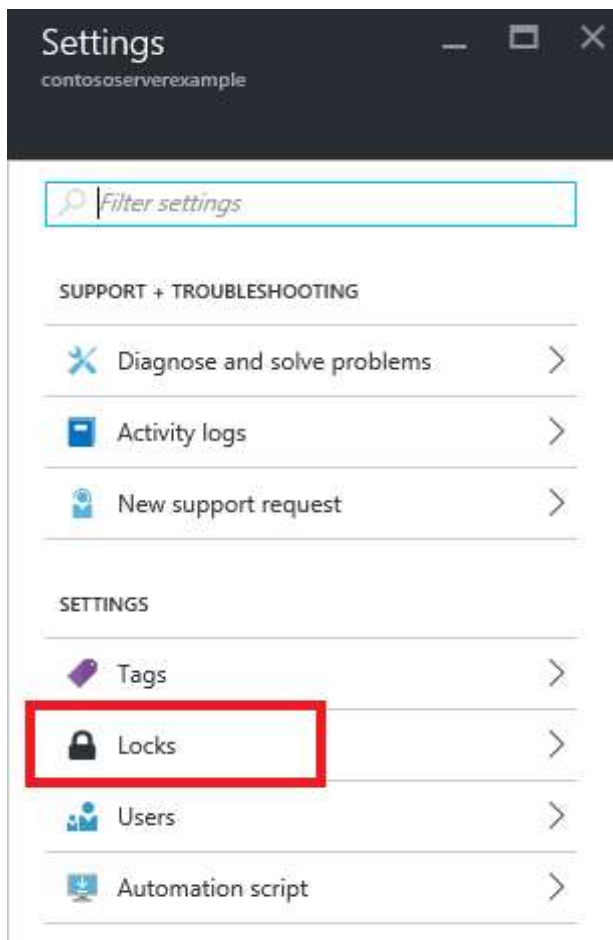

3. To add a lock, select **Add**.

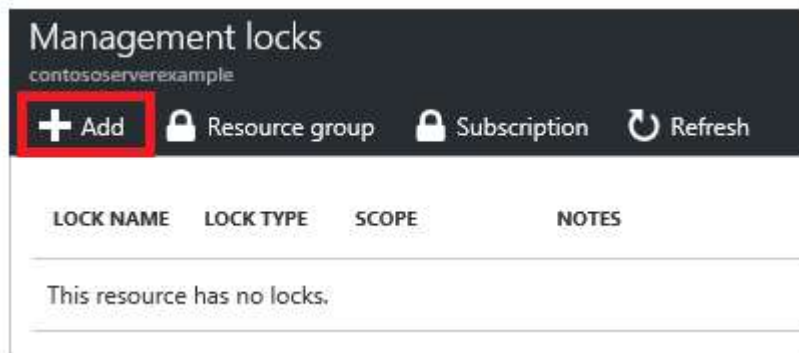

4. For **Lock type** select **Delete lock**, and click **OK**

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-lock-resources>

QUESTION 41

You have an Azure virtual machine named VM1.

From Azure Security Center, you get the following high-severity recommendation: “Install endpoint protection solutions on virtual machine”.

You need to resolve the issue causing the high-severity recommendation.

What should you do?

- A. Add the Microsoft Antimalware extension to VM1.
- B. Install Microsoft System Center Security Management Pack for Endpoint Protection on VM1.
- C. Add the Network Watcher Agent for Windows extension to VM1.
- D. Onboard VM1 to Microsoft Defender Advanced Threat Protection (Microsoft Defender ATP).

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-endpoint-protection>

QUESTION 42

HOTSPOT

You have a file named File1.yaml that contains the following contents.

```

apiVersion: 2018-10-01
location: eastus
name: containergroup1
properties:
  containers:
    - name: container1
      properties:
        environmentVariables:
          - name: 'Variable1'
            value: 'Value1'
          - name: 'Variable2'
            secureValue: 'Value2'
        image: nginx
        ports: []
        resources:
          requests:
            cpu: 1.0
            memoryInGB: 1.5
        osType: Linux
        restartPolicy: Always
      tags: null
    type: Microsoft.ContainerInstance/containerGroups

```

You create an Azure container instance named container1 by using File1.yaml.

You need to identify where you can access the values of Variable1 and Variable2.

What should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Variable1:	▼ Cannot be accessed Can be accessed from the Azure portal only Can be accessed from inside container1 only Can be accessed from inside container1 and the Azure portal
Variable2:	▼ Cannot be accessed Can be accessed from the Azure portal only Can be accessed from inside container1 only Can be accessed from inside container1 and the Azure portal

Correct Answer:

Answer Area

Variable1:

	▼
Cannot be accessed	
Can be accessed from the Azure portal only	
Can be accessed from inside container1 only	
Can be accessed from inside container1 and the Azure portal	

Variable2:

	▼
Cannot be accessed	
Can be accessed from the Azure portal only	
Can be accessed from inside container1 only	
Can be accessed from inside container1 and the Azure portal	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/container-instances/container-instances-environment-variables>

QUESTION 43

You have an Azure subscription that contains a virtual network. The virtual network contains the subnets shown in the following table.

Name	Has a network security group (NSG) associated to the virtual subnet
Subnet1	Yes
Subnet2	No

The subscription contains the virtual machines shown in the following table.

Name	Has an NSG associated to the network adaptor of the virtual machine	Connected to
VM1	No	Subnet1
VM2	No	Subnet2
VM3	No	Subnet1
VM4	Yes	Subnet2

You enable just in time (JIT) VM access for all the virtual machines.

You need to identify which virtual machines are protected by JIT.

Which virtual machines should you identify?

- A. VM4 only
- B. VM1 and VM3 only
- C. VM1, VM3 and VM4 only
- D. VM1, VM2, VM3, and VM4

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

An NSG needs to be enabled, either at the VM level or the subnet level.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-just-in-time>

QUESTION 44

HOTSPOT

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Connected to	Private IP address	Public IP address
VM1	VNET1/Subnet1	10.1.1.4	13.80.73.87
VM2	VNET2/Subnet2	10.2.1.4	213.199.133.190
VM3	VNET2/Subnet2	10.2.1.5	<i>None</i>

Subnet1 and Subnet2 have a Microsoft.Storage service endpoint configured.

You have an Azure Storage account named storageacc1 that is configured as shown in the following exhibit.

 Save  Discard  Refresh

Allow access from

☐ All networks ☒ Selected networks

Configure network security for your storage accounts. [Learn more.](#)

Virtual networks

Secure your storage account with virtual networks. [+ Add existing virtual network](#)

[+ Add new virtual network](#)

VIRTUAL NETWORK	SUBNET	ADDRESS RANGE	ENDPOINT STATUS	RESOURCE GROUP	SUBSCRIPTION
--------------------	--------	------------------	--------------------	-------------------	--------------

No network selected.

Firewall

Add IP ranges to allow access from the internet on your on-premises networks. [Learn more.](#)

Address Range

13.80.73.87 

Exceptions

- ☒ Allow trusted Microsoft services to access this storage account ⓘ
- ☐ Allow read access to storage logging from any network
- ☐ Allow read access to storage metrics from any network

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Hot Area:

Answer Area

Statements	Yes	No
From VM1, you can upload a blob to storageacc1.	☐	☐
From VM2, you can upload a blob to storageacc1.	☐	☐
From VM3 , you can upload a blob to storageacc1.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
From VM1, you can upload a blob to storageacc1.	☒	☐
From VM2, you can upload a blob to storageacc1.	☐	☒
From VM3 , you can upload a blob to storageacc1.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Yes

The public IP of VM1 is allowed through the firewall.

Box 2: No

The allowed virtual network list is empty so VM2 cannot access storageacc1 directly. The public IP address of VM2 is not in the allowed IP list so VM2 cannot access storageacc1 over the Internet.

Box 3: No

The allowed virtual network list is empty so VM3 cannot access storageacc1 directly. VM3 does not have a public IP address so it cannot access storageacc1 over the Internet.

Reference:

<https://docs.microsoft.com/en-gb/azure/storage/common/storage-network-security>

QUESTION 45

HOTSPOT

You have Azure virtual machines that have Update Management enabled. The virtual machines are configured as shown in the following table.

Name	Operating system	Region	Resource group
VM1	Windows Server 2012	East US	RG1
VM2	Windows Server 2012 R2	West US	RG1
VM3	Windows Server 2016	West US	RG2
VM4	Ubuntu Server 18.04 LTS	West US	RG2
VM5	Red Hat Enterprise Linux 7.4	East US	RG1
VM6	CentOS 7.5	East US	RG1

You schedule two update deployments named Update1 and Update2. Update1 updates VM3. Update2 updates VM6.

Which additional virtual machines can be updated by using Update1 and Update2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Update1:

	▼
VM2 only	
VM4 only	
VM1 and VM2 only	
VM1, VM2, VM4, VM5, and VM6	

Update2:

	▼
VM5 only	
VM1 and VM5 only	
VM4 and VM5 only	
VM1, VM2, and VM5 only	
VM1, VM2, VM3, VM4, and VM5	

Correct Answer:

Answer Area

Update1:

	▼
VM2 only	
VM4 only	
VM1 and VM2 only	
VM1, VM2, VM4, VM5, and VM6	

Update2:

	▼
VM5 only	
VM1 and VM5 only	
VM4 and VM5 only	
VM1, VM2, and VM5 only	
VM1, VM2, VM3, VM4, and VM5	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Update1: VM1 and VM2 only
VM3: Windows Server 2016 West US RG2

Update2: VM4 and VM5 only
VM6: CentOS 7.5 East US RG1

For Linux, the machine must have access to an update repository. The update repository can be private or public.

References:

<https://docs.microsoft.com/en-us/azure/automation/automation-update-management>

QUESTION 46

HOTSPOT

You have an Azure subscription named Sub1.

You create a virtual network that contains one subnet. On the subnet, you provision the virtual machines shown in the following table.

Name	Network interface	Application security group assignment	IP address
VM1	NIC1	AppGroup12	10.0.0.10
VM2	NIC2	AppGroup12	10.0.0.11
VM3	NIC3	AppGroup3	10.0.0.100
VM4	NIC4	AppGroup4	10.0.0.200

Currently, you have not provisioned any network security groups (NSGs).

You need to implement network security to meet the following requirements:

- Allow traffic to VM4 from VM3 only.
- Allow traffic from the Internet to VM1 and VM2 only.
- Minimize the number of NSGs and network security rules.

How many NSGs and network security rules should you create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

NSGs:

	▼
1	
2	
3	
4	

Network security rules:

	▼
1	
2	
3	
4	

Correct Answer:

Answer Area

NSGs:

	▼
1	
2	
3	
4	

Network security rules:

	▼
1	
2	
3	
4	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

NSGs: 2

Network security rules: 3

Not 2: You cannot specify multiple service tags or application groups) in a security rule.

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

QUESTION 47

HOTSPOT

You have an Azure key vault.

You need to delegate administrative access to the key vault to meet the following requirements:

- Provide a user named User1 with the ability to set advanced access policies for the key vault.
- Provide a user named User2 with the ability to add and delete certificates in the key vault.
- Use the principle of least privilege.

What should you use to assign access to each user? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User1:

	▼
A key vault access policy	
Azure Information Protection	
Azure Policy	
Managed identities for Azure resources	
RBAC	

User2:

	▼
A key vault access policy	
Azure Information Protection	
Azure Policy	
Managed identities for Azure resources	
RBAC	

Correct Answer:

Answer Area

User1: ▼

A key vault access policy
Azure Information Protection
Azure Policy
Managed identities for Azure resources
RBAC

User2: ▼

A key vault access policy
Azure Information Protection
Azure Policy
Managed identities for Azure resources
RBAC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

User1: RBAC

RBAC is used as the Key Vault access control mechanism for the management plane. It would allow a user with the proper identity to:

- set Key Vault access policies
- create, read, update, and delete key vaults
- set Key Vault tags

Note: Role-based access control (RBAC) is a system that provides fine-grained access management of Azure resources. Using RBAC, you can segregate duties within your team and grant only the amount of access to users that they need to perform their jobs.

User2: A key vault access policy

A key vault access policy is the access control mechanism to get access to the key vault data plane. Key Vault access policies grant permissions separately to keys, secrets, and certificates.

References:

<https://docs.microsoft.com/en-us/azure/key-vault/key-vault-secure-your-key-vault>

QUESTION 48

You have Azure Resource Manager templates that you use to deploy Azure virtual machines.

You need to disable unused Windows features automatically as instances of the virtual machines are provisioned.

What should you use?

- A. device compliance policies in Microsoft Intune
- B. Azure Automation State Configuration
- C. application security groups
- D. Azure Advisor

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You can use Azure Automation State Configuration to manage Azure VMs (both Classic and Resource Manager), on-premises VMs, Linux machines, AWS VMs, and on-premises physical machines. Note: Azure Automation State Configuration provides a DSC pull server similar to the Windows Feature DSC Service so that target nodes automatically receive configurations, conform to the desired state, and report back on their compliance. The built-in pull server in Azure Automation eliminates the need to set up and maintain your own pull server. Azure Automation can target virtual or physical Windows or Linux machines, in the cloud or on-premises.

QUESTION 49

From Azure Security Center, you enable Azure Container Registry vulnerability scanning of the images in Registry1.

You perform the following actions:

- Push a Windows image named Image1 to Registry1.
- Push a Linux image named Image2 to Registry1.
- Push a Windows image named Image3 to Registry1.
- Modify Image1 and push the new image as Image4 to Registry1.
- Modify Image2 and push the new image as Image5 to Registry1.

Which two images will be scanned for vulnerabilities? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Image4
- B. Image2
- C. Image1
- D. Image3
- E. Image5

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Only Linux images are scanned. Windows images are not scanned.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/azure-container-registry-integration>

QUESTION 50
HOTSPOT

You have two Azure virtual machines in the East US 2 region as shown in the following table.

Name	Operating system	Type	Tier
VM1	Windows Server 2008 R2	A3	Basic
VM2	Ubuntu 16.04-DAILY-LTS	L4s	Standard

You deploy and configure an Azure Key vault.

You need to ensure that you can enable Azure Disk Encryption on VM1 and VM2.

What should you modify on each virtual machine? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

VM1:

	▼
The operating system version	
The tier	
The type	

VM2:

	▼
The operating system version	
The tier	
The type	

Correct Answer:

Answer Area

VM1:

	▼
The operating system version	
The tier	
The type	

VM2:

	▼
The operating system version	
The tier	
The type	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

VM1: The Tier

The Tier needs to be upgraded to standard.

Disk Encryption for Windows and Linux IaaS VMs is in General Availability in all Azure public regions and Azure Government regions for Standard VMs and VMs with Azure Premium Storage.

VM2: The type

Need to change the VMtype to any of A, D, DS, G, GS, F, and so on, series IaaS VMs.

Not the operating system version: Ubuntu 16.04 is supported.

References:

<https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-overview>

https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-faq#bkmk_LinuxOSSupport

QUESTION 51

You have the Azure virtual machines shown in the following table.

Name	Operating system	Region	Resource group
VM1	Windows Server 2012	East US	RG1
VM2	Windows Server 2012 R2	West Europe	RG1
VM3	Windows Server 2016	West Europe	RG2
VM4	Red Hat Enterprise Linux 7.4	East US	RG2

You create an Azure Log Analytics workspace named Analytics1 in RG1 in the East US region.

Which virtual machines can be enrolled in Analytics1?

- A. VM1 only
- B. VM1, VM2, and VM3 only
- C. VM1, VM2, VM3, and VM4
- D. VM1 and VM4 only

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Note: Create a workspace

- In the Azure portal, click All services. In the list of resources, type Log Analytics. As you begin typing, the list filters based on your input. Select Log Analytics.
- Click Create, and then select choices for the following items:

Provide a name for the new Log Analytics workspace, such as DefaultLAWorkspace. OMS workspaces are now referred to as Log Analytics workspaces.

Select a Subscription to link to by selecting from the drop-down list if the default selected is not appropriate.

For Resource Group, select an existing resource group that contains one or more Azure virtual machines.

Select the Location your VMs are deployed to. For additional information, see which regions Log Analytics is available in.

Incorrect Answers:

B, C: A Log Analytics workspace provides a geographic location for data storage. VM2 and VM3 are at a different location.

D: VM4 is a different resource group.

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/manage-access>

QUESTION 52

You are testing an Azure Kubernetes Service (AKS) cluster. The cluster is configured as shown in the exhibit. (Click the **Exhibit** tab.)

Basics

Subscription	Azure Pass - Sponsorship
Resource group	RG1
Region	(US) East US
Kubernetes cluster name	AKScluster
Kubernetes version	1.12.8
DNS name prefix	AKScluster
Node count	3
Node size	Standard_DS2_v2

Scale

Virtual nodes	Disabled
VM scale sets (preview)	Disabled

Authentication

Enable RBAC	No
-------------	----

Networking

HTTP application routing	No
Network configuration	Basic

Monitoring

Enable container monitoring	No
-----------------------------	----

Tags

(none)

You plan to deploy the cluster to production. You disable HTTP application routing.

You need to implement application routing that will provide reverse proxy and TLS termination for AKS services by using a single IP address.

What should you do?

- A. Create an AKS Ingress controller.
- B. Install the container network interface (CNI) plug-in.
- C. Create an Azure Standard Load Balancer.
- D. Create an Azure Basic Load Balancer.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

An ingress controller is a piece of software that provides reverse proxy, configurable traffic routing, and TLS termination for Kubernetes services.

Reference:

<https://docs.microsoft.com/en-us/azure/aks/ingress-tls>

QUESTION 53

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You use Azure Security Center for the centralized policy management of three Azure subscriptions.

You use several policy definitions to manage the security of the subscriptions.

You need to deploy the policy definitions as a group to all three subscriptions.

Solution: You create a policy definition and assignments that are scoped to resource groups.

Does this meet the goal?

A. Yes

B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

References:

<https://4sysops.com/archives/apply-governance-policy-to-multiple-azure-subscriptions-with-management-groups/>

QUESTION 54

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You use Azure Security Center for the centralized policy management of three Azure subscriptions.

You use several policy definitions to manage the security of the subscriptions.

You need to deploy the policy definitions as a group to all three subscriptions.

Solution: You create a resource graph and an assignment that is scoped to a management group.

Does this meet the goal?

A. Yes

B. No

Correct Answer: B
Section: (none)
Explanation

Explanation/Reference:

Explanation:

Management groups in Microsoft Azure solve the problem of needing to impose governance policy on more than one Azure subscription simultaneously. However, you need to use an initiative, not a resource graph to bundle the policy definitions into a group that can be applied to the management group.

References:

<https://4sysops.com/archives/apply-governance-policy-to-multiple-azure-subscriptions-with-management-groups/>

QUESTION 55

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription. The subscription contains 50 virtual machines that run Windows Server 2012 R2 or Windows Server 2016.

You need to deploy Microsoft Antimalware to the virtual machines.

Solution: You add an extension to each virtual machine.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: A
Section: (none)
Explanation

Explanation/Reference:

Explanation:

You can use Visual Studio to enable and configure the Microsoft Antimalware service. This entails selecting Microsoft Antimalware extension from the dropdown list under Installed Extensions and click Add to configure with default antimalware configuration.

References:

<https://docs.microsoft.com/en-us/azure/security/fundamentals/antimalware>

QUESTION 56

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription. The subscription contains 50 virtual machines that run Windows Server 2012 R2 or Windows Server 2016.

You need to deploy Microsoft Antimalware to the virtual machines.

Solution: You connect to each virtual machine and add a Windows feature.

Does this meet the goal?

- A. Yes
- B. No

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Microsoft Antimalware is deployed as an extension and not a feature.

Reference:

<https://docs.microsoft.com/en-us/azure/security/fundamentals/antimalware>

QUESTION 57

You have an Azure Active Directory (Azure AD) tenant named Contoso.com and an Azure Kubernetes Service (AKS) cluster AKS1.

You discover that AKS1 cannot be accessed by using accounts from Contoso.com.

You need to ensure AKS1 can be accessed by using accounts from Contoso.com. The solution must minimize administrative effort.

What should you do first?

- A. From Azure recreate AKS1.
- B. From AKS1, upgrade the version of Kubernetes.
- C. From Azure AD, implement Azure AD Premium.
- D. From Azure AD, configure the User settings.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/aks/azure-ad-integration-cli>

QUESTION 58

You have an Azure subscription that contains an Azure Container Registry named Registry1. The subscription uses the Standard use tier of Azure Security Center.

You upload several container images to Registry1.

You discover that vulnerability security scans were not performed.

You need to ensure that the images are scanned for vulnerabilities when they are uploaded to Registry1.

What should you do?

- A. From the Azure portal modify the Pricing tier settings.
- B. From Azure CLI, lock the container images.

- C. Upload the container images by using AzCopy.
- D. Push the container images to Registry1 by using Docker

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://charbelnemnom.com/scan-container-images-in-azure-container-registry-with-azure-security-center/>

Manage security operations

Testlet 1

Case Study

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Contoso, Ltd. is a consulting company that has a main office in Montreal and two branch offices in Seattle and New York.

The company hosts its entire server infrastructure in Azure.

Contoso has two Azure subscriptions named Sub1 and Sub2. Both subscriptions are associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

Existing Environment

Azure AD

Contoso.com contains the users shown in the following table.

Name	City	Role
User1	Montreal	Global administrator
User2	MONTREAL	Security administrator
User3	London	Privileged role administrator
User4	Ontario	Application administrator
User5	Seattle	Cloud application administrator
User6	Seattle	User administrator
User7	Sydney	Reports reader
User8	Sydney	None
User9	Sydney	Owner

Contoso.com contains the security groups shown in the following table.

Name	Membership type	Dynamic membership rule
Group1	Dynamic user	user.city -contains "ON"
Group2	Dynamic user	user.city -match "**on"

Sub1

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6.

User9 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

Sub1 contains the Azure policies shown in the following table.

Policy definition	Resource type	Scope
Allowed resource types	networkSecurityGroups	RG4
Not allowed resource types	virtualNetworks/subnets	RG5
Not allowed resource types	networkSecurityGroups	RG5
Not allowed resource types	virtualNetworks/virtualNetworkPeerings	RG6

Sub2

Sub2 contains the virtual networks shown in the following table.

Name	Subnet
VNetwork1	Subnet11, Subnet12, and Subnet13
VNetwork2	Subnet21

Sub2 contains the virtual machines shown in the following table.

Name	Network interface	Application security group	Connected to
VM1	NIC1	ASG1	Subnet11
VM2	NIC2	ASG2	Subnet11
VM3	NIC3	<i>None</i>	Subnet12
VM4	NIC4	ASG1	Subnet13
VM5	NIC5	<i>None</i>	Subnet21

All virtual machines have public IP addresses and the Web Server (IIS) role installed. The firewalls for each virtual machine allow ping requests and web requests.

Sub2 contains the network security groups (NSGs) shown in the following table.

Name	Associated to
NSG1	NIC2
NSG2	Subnet11
NSG3	Subnet13
NSG4	Subnet21

NSG1 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG2 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	80	TCP	Internet	VirtualNetwork	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG3 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	TCP	ASG1	ASG1	Allow
150	Any	Any	ASG2	VirtualNetwork	Allow
200	Any	Any	Any	Any	Deny
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG4 has the inbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
100	Any	Any	Any	Any	Allow
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	AzureLoadBalancer	Any	Allow
65500	Any	Any	Any	Any	Deny

NSG1, NSG2, NSG3, and NSG4 have the outbound security rules shown in the following table.

Priority	Port	Protocol	Source	Destination	Action
65000	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	Any	Any	Any	Internet	Allow
65500	Any	Any	Any	Any	Deny

Technical requirements

Contoso identifies the following technical requirements:

- Deploy Azure Firewall to VNetwork1 in Sub2.
- Register an application named App2 in contoso.com.
- Whenever possible, use the principle of least privilege.
- Enable Azure AD Privileged Identity Management (PIM) for contoso.com.

QUESTION 1

HOTSPOT

You assign User8 the Owner role for RG4, RG5, and RG6.

In which resource groups can User8 create virtual networks and NSGs? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

User8 can create virtual networks in:

	▼
RG4 only	
RG6 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

User8 can create NSGs in:

	▼
RG4 only	
RG4 and RG5 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

Correct Answer:

Answer Area

User8 can create virtual networks in:

	▼
RG4 only	
RG6 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

User8 can create NSGs in:

	▼
RG4 only	
RG4 and RG5 only	
RG4 and RG6 only	
RG4, RG5, and RG6	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: RG4 only

The policy does not allow the creation of virtual networks in RG5 or RG6.
Box 2: The policy does not allow the creation of NSGs in RG5.

Policy definition	Resource type	Scope
Allowed resource types	networkSecurityGroups	RG4
Not allowed resource types	virtualNetworks/subnets	RG5
Not allowed resource types	networksSecurityGroups	RG5
Not allowed resource types	virtualNetworks/virtualNetworkPeerings	RG6

References:

<https://docs.microsoft.com/en-us/azure/governance/policy/overview>

QUESTION 2

HOTSPOT

Which virtual networks in Sub1 can User9 modify and delete in their current state? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Virtual networks that User9 can modify:

	▼
VNET4 only	
VNET4 and VNET1 only	
VNET4, VNET3, and VNET1 only	
VNET4, VNET3, VNET2, and VNET1	

Virtual networks that User9 can delete:

	▼
VNET4 only	
VNET4 and VNET1 only	
VNET4, VNET3, and VNET1 only	
VNET4, VNET3, VNET2, and VNET1	

Correct Answer:

Answer Area

Virtual networks that User9 can modify:

	▼
VNET4 only	
VNET4 and VNET1 only	
VNET4, VNET3, and VNET1 only	
VNET4, VNET3, VNET2, and VNET1	

Virtual networks that User9 can delete:

	▼
VNET4 only	
VNET4 and VNET1 only	
VNET4, VNET3, and VNET1 only	
VNET4, VNET3, VNET2, and VNET1	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: VNET4 and VNET1 only

RG1 has only Delete lock, while there are no locks on RG4.

RG2 and RG3 both have Read-only locks.

Box 2: VNET4 only

There are no locks on RG4, while the other resource groups have either Delete or Read-only locks.

Note: As an administrator, you may need to lock a subscription, resource group, or resource to prevent other users in your organization from accidentally deleting or modifying critical resources. You can set the lock level to CanNotDelete or ReadOnly. In the portal, the locks are called Delete and Read-only respectively.

- CanNotDelete means authorized users can still read and modify a resource, but they can't delete the resource.
- ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.

Scenario:

Sub1 contains six resource groups named RG1, RG2, RG3, RG4, RG5, and RG6.

User9 creates the virtual networks shown in the following table.

Name	Resource group
VNET1	RG1
VNET2	RG2
VNET3	RG3
VNET4	RG4

Sub1 contains the locks shown in the following table.

Name	Set on	Lock type
Lock1	RG1	Delete
Lock2	RG2	Read-only
Lock3	RG3	Delete
Lock4	RG3	Read-only

Reference:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-lock-resources>

Manage security operations

Testlet 2

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://www.litwareinc.com and http://www.litwareinc.com.
RG1	Resource group	RG1 is a resource group that contains VNet1, VM0, and VM1.
RG2	Resource group	RG2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Standard tier.

Requirements

Planned Changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Identity and Access Requirements

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to RG2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

- Microsoft Antimalware must be installed on the virtual machines in RG1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role.
- Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in RG1. Role1 must be available only for RG1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

Data and Application Requirements

Litware identifies the following data and applications requirements:

- The users in Group2 must be able to authenticate to SQLDB1 by using their Azure AD credentials.
- WebApp1 must enforce mutual authentication.

General Requirements

Litware identifies the following general requirements:

- Whenever possible, administrative effort must be minimized.
- Whenever possible, use of automation must be maximized.

QUESTION 1

You need to ensure that you can meet the security operations requirements. What should you do first?

- A. Turn on Auto Provisioning in Security Center.
- B. Integrate Security Center and Microsoft Cloud App Security.
- C. Upgrade the pricing tier of Security Center to Standard.
- D. Modify the Security Center workspace configuration.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The Standard tier extends the capabilities of the Free tier to workloads running in private and other public clouds, providing unified security management and threat protection across your hybrid cloud workloads. The Standard tier also adds advanced threat detection capabilities, which uses built-in behavioral analytics and machine learning to identify attacks and zero-days exploits, access and application controls to reduce exposure to network attacks and malware, and more.

Scenario: Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-pricing>

Manage security operations

Question Set 3

QUESTION 1

HOTSPOT

You suspect that users are attempting to sign in to resources to which they have no access.

You need to create an Azure Log Analytics query to identify failed user sign-in attempts from the last three days. The results must only show users who had more than five failed sign-in attempts.

How should you configure the query? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area


```
let timeframe = 3d;
SecurityEvent
| where TimeGenerated > ago(3d)
| where AccountType == 'User' and  == 4625
    ActivityID
    DataType
    EventID
    QuantityUnit


| summarize failed_login_attempts= 
    Count(),
    Countif(),
    Makeset(),
    Split(),

latest_failed_login=arg_max(TimeGenerated, Account) by Account
| where failed_login_attempts > 5
```

Correct Answer:

Answer Area

```
let timeframe = 3d;
SecurityEvent
| where TimeGenerated > ago(3d)
| where AccountType == 'User' and  == 4625

| summarize failed_login_attempts= 

latest_failed_login=arg_max(TimeGenerated, Account) by Account
| where failed_login_attempts > 5
```

Section: (none)

Explanation

Explanation/Reference:

Explanation:

The following example identifies user accounts that failed to log in more than five times in the last day, and when they last attempted to log in.

```
let timeframe = 1d;
SecurityEvent
| where TimeGenerated > ago(1d)
| where AccountType == 'User' and EventID == 4625 // 4625 - failed log in
| summarize failed_login_attempts=count(), latest_failed_login=arg_max(TimeGenerated, Account) by
Account
| where failed_login_attempts > 5
| project-away Account1
```

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/log-query/examples>

QUESTION 2

You have an Azure subscription named Sub1.

In Azure Security Center, you have a security playbook named Play1. Play1 is configured to send an email message to a user named User1.

You need to modify Play1 to send email messages to a distribution group named Alerts.

What should you use to modify Play1?

- A. Azure DevOps
- B. Azure Application Insights

- C. Azure Monitor
- D. Azure Logic Apps Designer

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You can change an existing playbook in Security Center to add an action, or conditions. To do that you just need to click on the name of the playbook that you want to change, in the Playbooks tab, and Logic App Designer opens up.

References:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-playbooks>

QUESTION 3

You create a new Azure subscription.

You need to ensure that you can create custom alert rules in Azure Security Center.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Onboard Azure Active Directory (Azure AD) Identity Protection.
- B. Create an Azure Storage account.
- C. Implement Azure Advisor recommendations.
- D. Create an Azure Log Analytics workspace.
- E. Upgrade the pricing tier of Security Center to Standard.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

D: You need write permission in the workspace that you select to store your custom alert.

References:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-custom-alert>

QUESTION 4

You have an Azure subscription named Sub1 that contains an Azure Log Analytics workspace named LAW1.

You have 100 on-premises servers that run Windows Server 2012 R2 and Windows Server 2016. The servers connect to LAW1. LAW1 is configured to collect security-related performance counters from the connected servers.

You need to configure alerts based on the data collected by LAW1. The solution must meet the following requirements:

- Alert rules must support dimensions.
- The time it takes to generate an alert must be minimized.
- Alert notifications must be generated only once when the alert is generated and once when the alert is resolved.

Which signal type should you use when you create the alert rules?

- A. Log
- B. Log (Saved Query)
- C. Metric
- D. Activity Log

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Metric alerts in Azure Monitor provide a way to get notified when one of your metrics cross a threshold. Metric alerts work on a range of multi-dimensional platform metrics, custom metrics, Application Insights standard and custom metrics.

Note: Signals are emitted by the target resource and can be of several types. Metric, Activity log, Application Insights, and Log.

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-metric>

QUESTION 5

DRAG DROP

You have an Azure subscription that contains 100 virtual machines. Azure Diagnostics is enabled on all the virtual machines.

You are planning the monitoring of Azure services in the subscription.

You need to retrieve the following details:

- Identify the user who deleted a virtual machine three weeks ago.
- Query the security events of a virtual machine that runs Windows Server 2016.

What should you use in Azure Monitor? To answer, drag the appropriate configuration settings to the correct details. Each configuration setting may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Select and Place:

Settings	Answer Area
Activity log Logs Metrics Service Health	Identify the user who deleted a virtual machine three weeks ago: Query the security events of a virtual machine that runs Windows Server 2016:

Correct Answer:

Settings

Activity log

Logs

Metrics

Service Health

Answer Area

Identify the user who deleted a virtual machine three weeks ago:

Activity log

Query the security events of a virtual machine that runs Windows Server 2016:

Logs

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box1: Activity log

Azure activity logs provide insight into the operations that were performed on resources in your subscription. Activity logs were previously known as “audit logs” or “operational logs,” because they report control-plane events for your subscriptions.

Activity logs help you determine the “what, who, and when” for write operations (that is, PUT, POST, or DELETE).

Box 2: Logs

Log Integration collects Azure diagnostics from your Windows virtual machines, Azure activity logs, Azure Security Center alerts, and Azure resource provider logs. This integration provides a unified dashboard for all your assets, whether they're on-premises or in the cloud, so that you can aggregate, correlate, analyze, and alert for security events.

References:

<https://docs.microsoft.com/en-us/azure/security/azure-log-audit>

QUESTION 6

HOTSPOT

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
RG1	Resource group	<i>Not applicable</i>
VM1	Virtual machine	RG1
VM2	Virtual machine	RG1
ActionGroup1	Action group	RG1

VM1 and VM2 are stopped.

You create an alert rule that has the following settings:

- Resource: RG1
- Condition: All Administrative operations
- Actions: Action groups configured for this alert rule: ActionGroup1
- Alert rule name: Alert1

You create an action rule that has the following settings:

- Scope: VM1
- Filter criteria: Resource Type = "Virtual Machines"
- Define on this scope: Suppression
- Suppression config: From now (always)
- Name: ActionRule1

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Note: Each correct selection is worth one point.

Hot Area:

Answer area	Statements	Yes	No
	If you start VM1, an alert is triggered.	☐	☐
	If you start VM2, an alert is triggered.	☐	☐
	If you add a tag to RG1, an alert is triggered.	☐	☐

Correct Answer:

Answer area	Statements	Yes	No
	If you start VM1, an alert is triggered.	☐	☒
	If you start VM2, an alert is triggered.	☒	☐
	If you add a tag to RG1, an alert is triggered.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1:

The scope for the action rule is set to VM1 and is set to suppress alerts indefinitely.

Box 2:

The scope for the action rule is not set to VM2.

Box 3:
Adding a tag is not an administrative operation.

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-activity-log>

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-action-rules>

QUESTION 7

DRAG DROP

You have an Azure subscription named Sub1 that contains an Azure Log Analytics workspace named LAW1.

You have 500 Azure virtual machines that run Windows Server 2016 and are enrolled in LAW1.

You plan to add the System Update Assessment solution to LAW1.

You need to ensure that System Update Assessment-related logs are uploaded to LAW1 from 100 of the virtual machines only.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Create a new workspace.	
Apply the scope configuration to the solution.	
Create a scope configuration.	
Create a computer group.	
Create a data source.	

Correct Answer:

Actions	Answer Area
Create a new workspace.	Create a computer group.
	Create a scope configuration.
	Apply the scope configuration to the solution.
Create a data source.	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/insights/solution-targeting>

QUESTION 8

You have an Azure subscription named Sub1 that contains the virtual machines shown in the following table.

Name	Resource group
VM1	RG1
VM2	RG2
VM3	RG1
VM4	RG2

You need to ensure that the virtual machines in RG1 have the Remote Desktop port closed until an authorized user requests access.

What should you configure?

- A. Azure Active Directory (Azure AD) Privileged Identity Management (PIM)
- B. an application security group
- C. Azure Active Directory (Azure AD) conditional access
- D. just in time (JIT) VM access

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Just-in-time (JIT) virtual machine (VM) access can be used to lock down inbound traffic to your Azure VMs, reducing exposure to attacks while providing easy access to connect to VMs when needed.

Note: When just-in-time is enabled, Security Center locks down inbound traffic to your Azure VMs by creating an NSG rule. You select the ports on the VM to which inbound traffic will be locked down. These ports are controlled by the just-in-time solution.

When a user requests access to a VM, Security Center checks that the user has Role-Based Access Control (RBAC) permissions that permit them to successfully request access to a VM. If the request is approved, Security Center automatically configures the Network Security Groups (NSGs) and Azure Firewall to allow inbound traffic to the selected ports and requested source IP addresses or ranges, for the amount of time that was specified. After the time has expired, Security Center restores the NSGs to their previous states. Those connections that are already established are not being interrupted, however.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-just-in-time>

QUESTION 9

SIMULATION

You need to ensure that web11597200 is protected from malware by using Microsoft Antimalware for Virtual Machines and is scanned every Friday at 01:00.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to install and configure the Microsoft Antimalware extension on the virtual machine named web11597200.

1. In the Azure portal, type **Virtual Machines** in the search box, select **Virtual Machines** from the search results then select **web11597200**. Alternatively, browse to Virtual Machines in the left navigation pane.
2. In the properties of web11597200, click on **Extensions**.
3. Click the **Add** button to add an **Extension**.
4. Scroll down the list of extensions and select **Microsoft Antimalware**.
5. Click the **Create** button. This will open the settings pane for the **Microsoft Antimalware Extension**.
6. In the **Scan day** field, select **Friday**.
7. In the **Scan time** field, enter **60**. The scan time is measured in minutes after midnight so 60 would be 01:00, 120 would be 02:00 etc.
8. Click the **OK** button to save the configuration and install the extension.

QUESTION 10

SIMULATION

You need to ensure that the events in the NetworkSecurityGroupRuleCounter log of the VNET01-Subnet0-NSG network security group (NSG) are stored in the logs11597200 Azure Storage account for 30 days.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure the diagnostic logging for the NetworkSecurityGroupRuleCounter log.

1. In the Azure portal, type **Network Security Groups** in the search box, select **Network Security Groups** from the search results then select **VNET01-Subnet0-NSG**. Alternatively, browse to Network Security Groups in the left navigation pane.
2. In the properties of the Network Security Group, click on **Diagnostic Settings**.
3. Click on the **Add diagnostic setting** link.
4. Provide a name in the **Diagnostic settings name** field. It doesn't matter what name you provide for the exam.
5. In the **Log** section, select **NetworkSecurityGroupRuleCounter**.
6. In the **Destination details** section, select **Archive to a storage account**.
7. In the **Storage account** field, select the **logs11597200** storage account.
8. In the **Retention (days)** field, enter **30**.
9. Click the **Save** button to save the changes.

QUESTION 11

SIMULATION

A user named Debbie has the Azure app installed on her mobile device.

You need to ensure that debbie@contoso.com is alerted when a resource lock is deleted.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

You need to configure an alert rule in Azure Monitor.

1. Type **Monitor** into the search box and select **Monitor** from the search results.
2. Click on **Alerts**.
3. Click on **+New Alert Rule**.
4. In the **Scope** section, click on the **Select resource** link.
5. In the **Filter by resource type** box, type **locks** and select **Management locks (locks)** from the filtered results.
6. Select the subscription then click the **Done** button.
7. In the **Condition** section, click on the **Select condition** link.
8. Select the **Delete management locks** condition then click the **Done** button.
9. In the **Action group** section, click on the **Select action group** link.
10. Click the **Create action group** button to create a new action group.
11. Give the group a name such as Debbie Mobile App (it doesn't matter what name you enter for the exam) then click the **Next: Notifications >** button.
12. In the **Notification type** box, select the **Email/SMS message/Push/Voice** option.
13. In the **Email/SMS message/Push/Voice** window, tick the **Azure app Push Notifications** checkbox and enter **debbie@contoso.com** in the **Azure account email field**.
14. Click the **OK** button to close the window.
15. Enter a name such as Debbie Mobile App in the notification name box.
16. Click the **Review & Create** button then click the **Create** button to create the action group.
17. Back in the **Create alert rule window**, in the **Alert rule details** section, enter a name such as **Management lock deletion** in the **Alert rule name** field.
18. Click the **Create alert rule** button to create the alert rule.

QUESTION 12

You are troubleshooting a security issue for an Azure Storage account.

You enable the diagnostic logs for the storage account.

What should you use to retrieve the diagnostics logs?

- A. Azure Storage Explorer
- B. SQL query editor in Azure
- C. File Explorer in Windows
- D. Azure Security Center

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

If you want to download the metrics for long-term storage or to analyze them locally, you must use a tool or write some code to read the tables. You must download the minute metrics for analysis. The tables do not appear if you list all the tables in your storage account, but you can access them directly by name. Many storage-browsing tools are aware of these tables and enable you to view them directly (see Azure Storage

Client Tools for a list of available tools).

Microsoft provides several graphical user interface (GUI) tools for working with the data in your Azure Storage account. All of the tools outlined in the following table are free.

Azure Storage client tool	Supported platforms	Block Blob	Page Blob	Append Blob	Tables	Queues	Files
Azure portal	Web	Yes	Yes	Yes	Yes	Yes	Yes
Azure Storage Explorer	Windows, OSX	Yes	Yes	Yes	Yes	Yes	Yes
Microsoft Visual Studio Cloud Explorer	Windows	Yes	Yes	Yes	Yes	Yes	No

Note:

There are several versions of this question in the exam. The questions in the exam have two different correct answers:

1. Azure Storage Explorer
2. AZCopy

Other incorrect answer options you may see on the exam include the following:

1. Azure Monitor
2. The Security & Compliance admin center
3. Azure Cosmos DB explorer
4. Azure Monitor

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-analytics-metrics?toc=%2fazure%2fstorage%2fblobs%2ftoc.json>

<https://docs.microsoft.com/en-us/azure/storage/common/storage-explorers>

QUESTION 13

SIMULATION

You plan to connect several Windows servers to the WS11641655 Azure Log Analytics workspace.

You need to ensure that the events in the System event logs are collected automatically to the workspace after you connect the Windows servers.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation


Explanation/Reference:

Explanation:

Azure Monitor can collect events from the Windows event logs or Linux Syslog and performance counters that you specify for longer term analysis and reporting, and take action when a particular condition is detected. Follow these steps to configure collection of events from the Windows system log and Linux Syslog, and several common performance counters to start with.

Data collection from Windows VM

1. In the Azure portal, locate the WS11641655 Azure Log Analytics workspace then select **Advanced settings**.

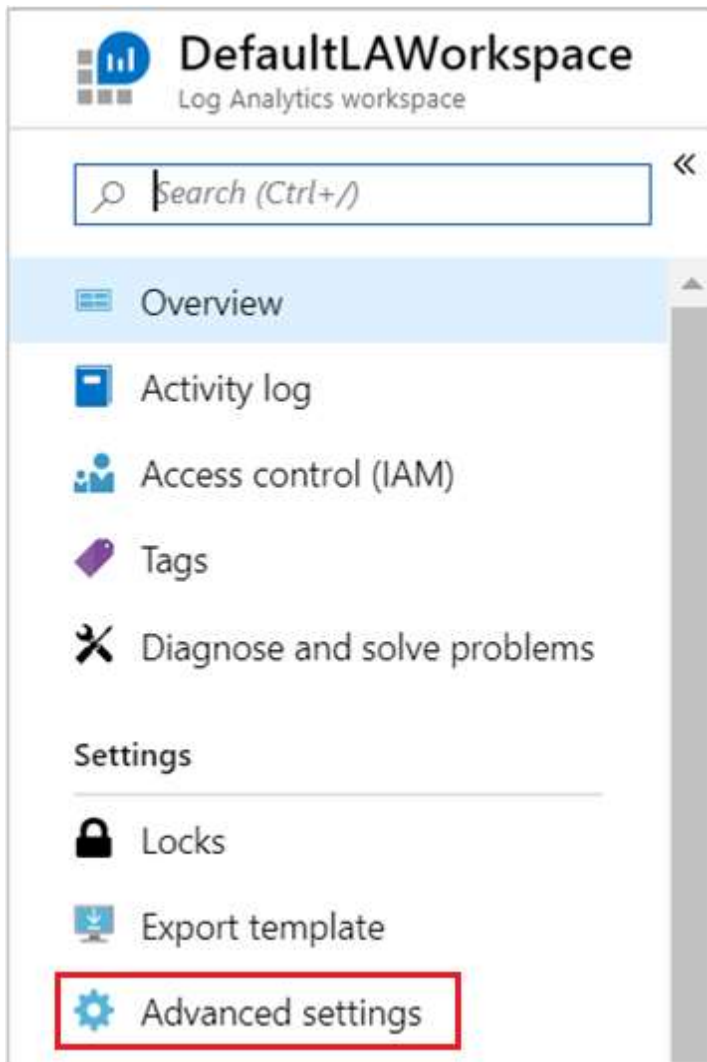

2. Select **Data**, and then select **Windows Event Logs**.
3. You add an event log by typing in the name of the log. Type **System** and then select the plus sign +.
4. In the table, check the severities **Error** and **Warning**. (for this question, select all severities to ensure that ALL logs are collected).
5. Select **Save** at the top of the page to save the configuration.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-monitor/learn/quick-collect-azurevm>

QUESTION 14

SIMULATION

You need to ensure that the AzureBackupReport log for the Vault1 Recovery Services vault is stored in the WS11641655 Azure Log Analytics workspace.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In the Azure portal, type **Recovery Services Vaults** in the search box, select **Recovery Services Vaults** from the search results then select **Vault1**. Alternatively, browse to **Recovery Services Vaults** in the left navigation pane.
2. In the properties of Vault1, scroll down to the **Monitoring** section and select **Diagnostic Settings**.
3. Click the **Add a diagnostic setting** link.
4. Enter a name in the **Diagnostic settings name** box.
5. In the **Log** section, select **AzureBackupReport**.

Category details

log

☐ AzureBackupReport

☐ CoreAzureBackup

☐ AddonAzureBackupJobs

☐ AddonAzureBackupAlerts

☐ AddonAzureBackupPolicy

6. In the **Destination details** section, select **Send to log analytics**

Destination details

☐ Send to Log Analytics

☐ Archive to a storage account

☐ Stream to an event hub

7. Select the WS11641655 Azure Log Analytics workspace.
8. Click the **Save** button to save the changes.

Reference:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-diagnostic-events>

QUESTION 15

SIMULATION

You need to ensure that the audit logs from the SQLdb1 Azure SQL database are stored in the WS11641655 Azure Log Analytics workspace.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In the Azure portal, type **SQL** in the search box, select **SQL databases** from the search results then select **SQLdb1**. Alternatively, browse to **SQL databases** in the left navigation pane.
2. In the properties of SQLdb1, scroll down to the **Security** section and select **Auditing**.
3. Turn auditing on if it isn't already, tick the **Log Analytics** checkbox then click on **Configure**.

Auditing ⓘ

☒ ON ☐ OFF

Audit log destination (choose at least one):

☐ Storage

☒ Log Analytics (Preview)

Log Analytics details

Configure

☐ Event Hub (Preview)

4. Select the **WS11641655** Azure Log Analytics workspace.
5. Click **Save** to save the changes.

QUESTION 16

HOTSPOT

You are configuring just in time (JIT) VM access to a set of Azure virtual machines.

You need to grant users PowerShell access to the virtual machine by using JIT VM access.

What should you configure? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Permission that must be granted to users on VM:

	▼
Read	
Update	
View	
Write	

TCP port that must be allowed:

	▼
22	
25	
3389	
5986	

Correct Answer:

Answer Area

Permission that must be granted to users on VM:

	▼
Read	
Update	
View	
Write	

TCP port that must be allowed:

	▼
22	
25	
3389	
5986	

Section: (none)

Explanation

Explanation/Reference:

QUESTION 17

HOTSPOT

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Region	Resource group
SQL1	Azure SQL database	East US	RG1
Analytics1	Azure Log Analytics workspace	East US	RG1
Analytics2	Azure Log Analytics workspace	East US	RG2
Analytics3	Azure Log Analytics workspace	West Europe	RG1

You create the Azure Storage accounts shown in the following table.

Name	Region	Resource group	Storage account type	Access tier (default)
Storage1	East US	RG1	Blob	Cool
Storage2	East US	RG2	General purpose V1	<i>Not applicable</i>
Storage3	West Europe	RG1	General purpose V2	Hot

You need to configure auditing for SQL1.

Which storage accounts and Log Analytics workspaces can you use as the audit log destination? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Storage accounts that can be used as the audit log destination:

	▼
Storage1 only	
Storage2 only	
Storage1 and Storage2 only	
Storage1, Storage2, and Storage3	

Log Analytics workspaces that can be used as the audit log destination:

	▼
Analytics1 only	
Analytics1 and Analytics2 only	
Analytics1 and Analytics3 only	
Analytics1, Analytics2, and Analytics3	

Correct Answer:

Answer Area

Storage accounts that can be used as the audit log destination:

	▼
Storage1 only	
Storage2 only	
Storage1 and Storage2 only	
Storage1, Storage2, and Storage3	

Log Analytics workspaces that can be used as the audit log destination:

	▼
Analytics1 only	
Analytics1 and Analytics2 only	
Analytics1 and Analytics3 only	
Analytics1, Analytics2, and Analytics3	

Section: (none)

Explanation

Explanation/Reference:

QUESTION 18

HOTSPOT

You have an Azure subscription named Sub1. Sub1 has an Azure Storage account named storage1 that contains the resources shown in the following table.

Name	Type
Container1	Blob container
Share1	File share

You generate a shared access signature (SAS) to connect to the blob service and the file service.

Which tool can you use to access the contents in Container1 and Share1 by using the SAS? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Tools for Container1:

	▼
Robocopy.exe	
Azure Storage Explorer	
File Explorer	

Tools for Share1:

	▼
Robocopy.exe	
Azure Storage Explorer	
File Explorer	

Correct Answer:

Answer Area

Tools for Container1:

	▼
Robocopy.exe	
Azure Storage Explorer	
File Explorer	

Tools for Share1:

	▼
Robocopy.exe	
Azure Storage Explorer	
File Explorer	

Section: (none)

Explanation

Explanation/Reference:

QUESTION 19

You have an Azure Storage account named storage1 that has a container named container1.

You need to prevent the blobs in container1 from being modified.

What should you do?

- A. From container1, change the access level.
- B. From container1, add an access policy.
- C. From container1, modify the Access Control (IAM) settings.

D. From storage1, enable soft delete for blobs.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-immutable-storage?tabs=azure-portal>

QUESTION 20

You company has an Azure Active Directory (Azure AD) tenant named contoso.com.

You plan to create several security alerts by using Azure Monitor.

You need to prepare the Azure subscription for the alerts.

What should you create first?

- A. An Azure Storage account
- B. an Azure Log Analytics workspace
- C. an Azure event hub
- D. an Azure Automation account

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 21

You company has an Azure subscription named Sub1. Sub1 contains an Azure web app named WebApp1 that uses Azure Application Insights. WebApp1 requires users to authenticate by using OAuth 2.0 client secrets.

Developers at the company plan to create a multi-step web test app that preforms synthetic transactions emulating user traffic to Web App1.

You need to ensure that web tests can run unattended.

What should you do first?

- A. In Microsoft Visual Studio, modify the .webtest file.
- B. Upload the .webtest file to Application Insights.
- C. Register the web test app in Azure AD.
- D. Add a plug-in to the web test app.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 22

You have an Azure subscription named Subscription1.

You deploy a Linux virtual machine named VM1 to Subscription1.

You need to monitor the metrics and the logs of VM1.

What should you use?

- A. the AzurePerformanceDiagnostics extension
- B. Azure HDInsight
- C. Linux Diagnostic Extension (LAD) 3.0
- D. Azure Analysis Services

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/extensions/diagnostics-linux>

QUESTION 23

You onboard Azure Sentinel. You connect Azure Sentinel to Azure Security Center.

You need to automate the mitigation of incidents in Azure Sentinel. The solution must minimize administrative effort.

What should you create?

- A. an alert rule
- B. a playbook
- C. a function app
- D. a runbook

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/sentinel/tutorial-respond-threats-playbook>

QUESTION 24

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You need to configure diagnostic settings for contoso.com. The solution must meet the following requirements:

- Retain logs for two years.
- Query logs by using the Kusto query language.
- Minimize administrative effort.

Where should you store the logs?

- A. an Azure event hub
- B. an Azure Log Analytics workspace
- C. an Azure Storage account

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 25

You are troubleshooting a security issue for an Azure Storage account.

You enable the diagnostic logs for the storage account.

What should you use to retrieve the diagnostics logs?

- A. the Security & Compliance admin center
- B. Azure Security Center
- C. Azure Cosmos DB explorer
- D. AzCopy

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

If you want to download the metrics for long-term storage or to analyze them locally, you must use a tool or write some code to read the tables. You must download the minute metrics for analysis. The tables do not appear if you list all the tables in your storage account, but you can access them directly by name. Many storage-browsing tools are aware of these tables and enable you to view them directly (see Azure Storage Client Tools for a list of available tools).

Microsoft provides several graphical user interface (GUI) tools for working with the data in your Azure Storage account. All of the tools outlined in the following table are free.

Azure Storage client tool	Supported platforms	Block Blob	Page Blob	Append Blob	Tables	Queues	Files
Azure portal	Web	Yes	Yes	Yes	Yes	Yes	Yes
Azure Storage Explorer	Windows, OSX	Yes	Yes	Yes	Yes	Yes	Yes
Microsoft Visual Studio Cloud Explorer	Windows	Yes	Yes	Yes	Yes	Yes	No

Note:

There are several versions of this question in the exam. The questions in the exam have two different correct answers:

1. Azure Storage Explorer
2. AZCopy

Other incorrect answer options you may see on the exam include the following:

1. SQL query editor in Azure
2. File Explorer in Windows
3. Azure Monitor

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-analytics-metrics?toc=%2fazure%2fstorage%2fblobs%2ftoc.json>

<https://docs.microsoft.com/en-us/azure/storage/common/storage-explorers>

QUESTION 26

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Operating system
VM1	Windows Server 2016
VM2	Ubuntu Server 18.04 LTS

From Azure Security Center, you turn on Auto Provisioning.

You deploy the virtual machines shown in the following table.

Name	Operating system
VM3	Windows Server 2016
VM4	Ubuntu Server 18.04 LTS

On which virtual machines is the Microsoft Monitoring Agent installed?

- A. VM3 only
- B. VM1 and VM3 only
- C. VM3 and VM4 only
- D. VM1, VM2, VM3, and VM4

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

When automatic provisioning is enabled, Security Center provisions the Microsoft Monitoring Agent on all supported Azure VMs and any new ones that are created.

Supported Operating systems include: Ubuntu 14.04 LTS (x86/x64), 16.04 LTS (x86/x64), and 18.04 LTS (x64) and Windows Server 2008 R2, 2012, 2012 R2, 2016, version 1709 and 1803.

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-faq>

QUESTION 27

SIMULATION

You need to email an alert to a user named admin1@contoso.com if the average CPU usage of a virtual machine named VM1 is greater than 70 percent for a period of 15 minutes.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Create an alert rule on a metric with the Azure portal

1. In the portal, locate the resource, here VM1, you are interested in monitoring and select it.

2. Select Alerts (Classic) under the MONITORING section. The text and icon may vary slightly for different resources.

3. Select the Add metric alert (classic) button and fill in the fields as per below, and click OK.

Metric: CPU Percentage

Condition: Greater than

Period: Over last 15 minutes

Notify via: email

Additional administrator email(s): admin1@contoso.com

The screenshot shows the 'Add metric alert (classic)' configuration form in the Azure portal. The form is divided into several sections: 'Condition' with a dropdown set to 'Greater than'; 'Threshold' with a text input set to '60' and a percentage symbol to its right; 'Period' with a dropdown set to 'Over the last 5 minutes'; 'Notify via' with a checked checkbox for 'Email owners, contributors, and readers'; 'Additional administrator email(s)' with a text input set to 'admin@contoso.com'; and 'Webhook' with a text input set to 'http://www.contoso.com/dowork?param'. Each input field has a green checkmark icon on its right side, indicating it is valid.

Reference:

<https://docs.microsoft.com/en-us/azure/sql-database/sql-database-insights-alerts-portal>

QUESTION 28

SIMULATION

You need to collect all the audit failure data from the security log of a virtual machine named VM1 to an Azure Storage account.

To complete this task, sign in to the Azure portal.

This task might take several minutes to complete. You can perform other tasks while the task completes.

Correct Answer: See the explanation below.

Section: (none)

Explanation


Explanation/Reference:

Explanation:

Step 1: Create a workspace

Azure Monitor can collect data directly from your Azure virtual machines into a Log Analytics workspace for detailed analysis and correlation.

1. In the Azure portal, select All services. In the list of resources, type Log Analytics. As you begin typing, the list filters based on your input. Select Log Analytics workspaces.

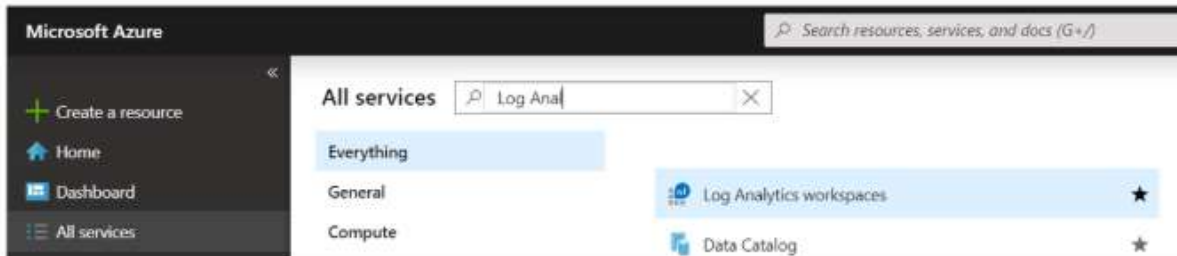

2. Select Create, and then select choices for the following items:

A screenshot of the 'Log Analytics workspace' creation form in the Azure portal. The form has a title bar with 'Log Analytics workspace' and a subtitle 'Create new or link existing workspace'. Below the title bar, there are two radio buttons: 'Create New' (selected) and 'Link Existing'. The form contains several fields with red asterisks indicating required information: 'Log Analytics Workspace' with the value 'DefaultLAWorkspace' and a green checkmark; 'Subscription' with the value 'Microsoft Azure'; 'Resource group' with the value 'Prod'; 'Location' with the value 'East US'; and 'Pricing tier' with the value 'Per GB (2018)'. There is a 'Create new' link below the 'Resource group' field and a right arrow next to the 'Pricing tier' field.

3. After providing the required information on the Log Analytics workspace pane, select OK.

While the information is verified and the workspace is created, you can track its progress under Notifications

from the menu.

Step 2: Enable the Log Analytics VM Extension

Installing the Log Analytics VM extension for Windows and Linux allows Azure Monitor to collect data from your Azure VMs.

1. In the Azure portal, select All services found in the upper left-hand corner. In the list of resources, type Log Analytics. As you begin typing, the list filters based on your input. Select Log Analytics workspaces.
2. In your list of Log Analytics workspaces, select DefaultWorkspace (the name you created in step 1).
3. On the left-hand menu, under Workspace Data Sources, select Virtual machines.
4. In the list of Virtual machines, select a virtual machine you want to install the agent on. Notice that the Log Analytics connection status for the VM indicates that it is Not connected.
5. In the details for your virtual machine, select Connect. The agent is automatically installed and configured for your Log Analytics workspace. This process takes a few minutes, during which time the Status shows Connecting.

After you install and connect the agent, the Log Analytics connection status will be updated with This workspace.

Reference: <https://docs.microsoft.com/en-us/azure/azure-monitor/learn/quick-collect-azurevm>

QUESTION 29

You have 10 virtual machines on a single subnet that has a single network security group (NSG).

You need to log the network traffic to an Azure Storage account.

What should you do?

- A. Install the Network Performance Monitor solution.
- B. Create an Azure Log Analytics workspace.
- C. Enable diagnostic logging for the NSG.
- D. Enable NSG flow logs.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A network security group (NSG) enables you to filter inbound traffic to, and outbound traffic from, a virtual machine (VM). You can log network traffic that flows through an NSG with Network Watcher's NSG flow log capability. Steps include:

- Create a VM with a network security group
- Enable Network Watcher and register the Microsoft.Insights provider
- Enable a traffic flow log for an NSG, using Network Watcher's NSG flow log capability
- Download logged data
- View logged data

Reference:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-nsg-flow-logging-portal>

QUESTION 30

You have an Azure subscription that contains the virtual machines shown in the following table.

Name	Operating system
VM1	Windows Server 2016
VM2	Ubuntu Server 18.04 LTS

From Azure Security Center, you turn on Auto Provisioning.

You deploy the virtual machines shown in the following table.

Name	Operating system
VM3	Windows Server 2016
VM4	Ubuntu Server 18.04 LTS

On which virtual machines is the Log Analytics Agent installed?

- A. VM3 only
- B. VM1 and VM3 only
- C. VM3 and VM4 only
- D. VM1, VM2, VM3, and VM4

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

When automatic provisioning is On, Security Center provisions the Log Analytics Agent on all supported Azure VMs and any new ones that are created.

Supported Operating systems include: Ubuntu 14.04 LTS (x86/x64), 16.04 LTS (x86/x64), and 18.04 LTS (x64) and Windows Server 2008 R2, 2012, 2012 R2, 2016, version 1709 and 1803

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-enable-data-collection>

QUESTION 31

HOTSPOT

You plan to use Azure Log Analytics to collect logs from 200 servers that run Windows Server 2016.

You need to automate the deployment of the Microsoft Monitoring Agent to all the servers by using an Azure Resource Manager template.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "type" : "Microsoft.Compute/virtualMachines/extensions",
  "name" : "[concat(parameter('vmname'), /OMSExtension)]",
  "apiVersion" : "[variables('apiVersion')]",
  "location" : "[resourceGroup().location]",
  "dependsOn" : [
    "[concat('Microsoft.Compute/virtualMachines/', parameters('vmName'))]"
  ],
  "properties" : {
    "publisher" : "Microsoft.EnterpriseCloud.Monitoring",
    "type" : "MicrosoftMonitoringAgent",
    "typeHandlerVersion" : "1.0",
    "autoUpgradeMinorVersion" : true,
    "settings" : {
      

|                        |   |
|------------------------|---|
|                        | ▼ |
| "AzureADApplicationID" |   |
| "WorkspacelD"          |   |
| "WorkspaceName"        |   |
| "WorkspaceURL"         |   |


      : "[variable('var1')]"
    },
    "protectedSettings" : {
      

|                            |   |
|----------------------------|---|
|                            | ▼ |
| "AzureADApplicationSecret" |   |
| "StorageAccountKey"        |   |
| "WorkspacelD"              |   |
| "WorkspaceKey"             |   |


      : "[variable ('var2')]"
    }
  }
}
```

Correct Answer:

Answer Area

```
{
  "type" : "Microsoft.Compute/virtualMachines/extensions",
  "name" : "[concat(parameter('vmname'), /OMSExtension)]",
  "apiVersion" : "[variables('apiVersion')]",
  "location" : "[resourceGroup().location]",
  "dependsOn" : [
    "[concat('Microsoft.Compute/virtualMachines/', parameters('vmName'))]"
  ],
  "properties" : {
    "publisher" : "Microsoft.EnterpriseCloud.Monitoring",
    "type" : "MicrosoftMonitoringAgent",
    "typeHandlerVersion" : "1.0",
    "autoUpgradeMinorVersion" : true,
    "settings" : {
      

|                        |   |                        |
|------------------------|---|------------------------|
|                        | ▼ | : "[variable('var1')]" |
| "AzureADApplicationID" |   |                        |
| "WorkspaceID"          |   |                        |
| "WorkspaceName"        |   |                        |
| "WorkspaceURL"         |   |                        |


    },
    "protectedSettings" : {
      

|                            |   |                        |
|----------------------------|---|------------------------|
|                            | ▼ | : "[variable('var2')]" |
| "AzureADApplicationSecret" |   |                        |
| "StorageAccountKey"        |   |                        |
| "WorkspaceID"              |   |                        |
| "WorkspaceKey"             |   |                        |


    }
  }
}
```

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://blogs.technet.microsoft.com/manageabilityguys/2015/11/19/enabling-the-microsoft-monitoring-agent-in-windows-json-templates/>

QUESTION 32

HOTSPOT

You have an Azure subscription that contains the alerts shown in the following exhibit.

All Alerts

New alert rule

Edit columns

Manage alert rules

View classic alerts

Refresh

Change state

Don't see a subscription? Open Directory + Subscription settings

Subscription

Azure Pass - Sponsorship

Resource group

Type to start filtering ...

Resource type

0 selected

Resource

Type to start filtering ...

Time range

Past hour

Monitor service

15 selected

Monitor condition

2 selected

Severity

Sev 4

Alert state

3 selected

Smart group id

Smart group id

All Alerts

Alerts By Smart Group (Preview)

Search by name (case-insensitive)

NAME	SEVERITY	MONITOR C...	ALERT STATE	AFFECT...	MONITOR SERV...	SIGNAL TYPE	FIRED TIME	SU...
Alert1	Sev4	Fired	New		ActivityLog Ad...	Log	6/6/2019, 11:23:53 ...	Azure ...
Alert1	Sev4	Fired	Acknowledged		ActivityLog Ad...	Log	6/6/2019, 11:23:52 ...	Azure ...
Alert2	Sev4	Fired	Acknowledged		ActivityLog Ad...	Log	6/6/2019, 11:23:25 ...	Azure ...
Alert2	Sev4	Fired	Closed		ActivityLog Ad...	Log	6/6/2019, 11:23:24 ...	Azure ...

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

The state of Alert1 that was fired at 11:23:52

▼

cannot be changed

can be changed to Closed only

can be changed to New only

can be changed to New or Closed

The state of Alert2 that was fired at 11:23:24

▼

cannot be changed

can be changed to Acknowledged only

can be changed to New only

can be changed to New or Acknowledged

Correct Answer:

Answer Area

The state of Alert1 that was fired at 11:23:52

	▼
cannot be changed	
can be changed to Closed only	
can be changed to New only	
can be changed to New or Closed	

The state of Alert2 that was fired at 11:23:24

	▼
cannot be changed	
can be changed to Acknowledged only	
can be changed to New only	
can be changed to New or Acknowledged	

Section: (none)

Explanation

Explanation/Reference:

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/alerts-overview>

QUESTION 33

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

You are assigned the Global administrator role for the tenant. You are responsible for managing Azure Security Center settings.

You need to create a custom sensitivity label.

What should you do?

- A. Create a custom sensitive information type.
- B. Elevate access for global administrators in Azure AD.
- C. Upgrade the pricing tier of the Security Center to Standard.
- D. Enable integration with Microsoft Cloud App Security.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

First, you need to create a new sensitive information type because you can't directly modify the default rules.

Reference:

<https://docs.microsoft.com/en-us/office365/securitycompliance/customize-a-built-in-sensitive-information-type>

QUESTION 34

HOTSPOT

You have the hierarchy of Azure resources shown in the following exhibit.



You create the Azure Blueprints definitions shown in the following table.

Name	Published at
Blueprint1	Tenant Root Group
Blueprint2	Subscription1

To which objects can you assign Blueprint1 and Blueprint2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Blueprint1:

ManagementGroup1 only
ManagementGroup1, Subscription1, and RG1 only
ManagementGroup1, Subscription1, RG1, and VM1
Subscription1 only
Tenant Root Group only
Tenant Root Group, ManagementGroup1, and Subscription1 only

Blueprint2:

ManagementGroup1 only
Subscription1 and RG1 only
Subscription1 only
Subscription1, RG1, and VM1

Correct Answer:

Answer Area

Blueprint1:

ManagementGroup1 only
ManagementGroup1, Subscription1, and RG1 only
ManagementGroup1, Subscription1, RG1, and VM1
Subscription1 only
Tenant Root Group only
Tenant Root Group, ManagementGroup1, and Subscription1 only

Blueprint2:

ManagementGroup1 only
Subscription1 and RG1 only
Subscription1 only
Subscription1, RG1, and VM1

Section: (none)
Explanation

Explanation/Reference:

Explanation:

Blueprints can only be assigned to subscriptions.

QUESTION 35

You have an Azure subscription that contains the Azure Log Analytics workspaces shown in the following table.

Name	Location	Description
Workspace1	East US	Used by Azure Sentinel
Workspace2	West US	<i>Not applicable</i>

You create the virtual machines shown in the following table.

Name	Location	Operating system	Connected to
VM1	East US	Windows Server 2019	<i>None</i>
VM2	East US	Windows Server 2019	Workspace2
VM3	West US	Windows Server 2019	<i>None</i>
VM4	West US	Windows Server 2019	Workspace2

You plan to use Azure Sentinel to monitor Windows Defender Firewall on the virtual machines.

Which virtual machines you can connect to Azure Sentinel?

- A. VM1 only
- B. VM1 and VM3 only
- C. VM1, VM2, VM3, and VM4
- D. VM1 and VM2 only

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/sentinel/connect-windows-firewall>

QUESTION 36

HOTSPOT

You have an Azure subscription that contains a user named Admin1 and a resource group named RG1.

In Azure Monitor, you create the alert rules shown in the following table.

Name	Resource	Condition
Rule1	RG1	All security operations
Rule2	RG1	All administrative operations
Rule3	Azure subscription	All security operations by Admin1
Rule4	Azure subscription	All administrative operations by Admin1

Admin1 performs the following actions on RG1:

- Adds a virtual network named VNET1
- Adds a Delete lock named Lock1

Which rules will trigger an alert as a result of the actions of Admin1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Adding VNET1:

☐	Rule2 only
☐	Rule4 only
☐	Rule2 and Rule 4 only
☐	Rule3 and Rule 4 only
☐	Rule1, Rule2, Rule3 and Rule 4

Adding Lock1:

☐	Rule2 only
☐	Rule4 only
☐	Rule2 and Rule 4 only
☐	Rule3 and Rule 4 only
☐	Rule1, Rule2, Rule3 and Rule 4

Correct Answer:

Answer Area

Adding VNET1:

	▼
Rule2 only	
Rule4 only	
Rule2 and Rule 4 only	
Rule3 and Rule 4 only	
Rule1, Rule2, Rule3 and Rule 4	

Adding Lock1:

	▼
Rule2 only	
Rule4 only	
Rule2 and Rule 4 only	
Rule3 and Rule 4 only	
Rule1, Rule2, Rule3 and Rule 4	

Section: (none)

Explanation

Explanation/Reference:

QUESTION 37

You have an Azure subscription that contains 100 virtual machines and has Azure Security Center Standard tier enabled.

You plan to perform a vulnerability scan of each virtual machine.

You need to deploy the vulnerability scanner extension to the virtual machines by using an Azure Resource Manager template.

Which two values should you specify in the code to automate the deployment of the extension to the virtual machines? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. the user-assigned managed identity
- B. the workspace ID
- C. the Azure Active Directory (Azure AD) ID
- D. the Key Vault managed storage account key
- E. the system-assigned managed identity
- F. the primary shared key

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

QUESTION 38

You have an Azure subscription that contains a user named Admin1 and a virtual machine named VM1. VM1 runs Windows Server 2019 and was deployed by using an Azure Resource Manager template. VM1 is the member of a backend pool of a public Azure Basic Load Balancer.

Admin1 reports that VM1 is listed as Unsupported on the Just in time VM access blade of Azure Security Center.

You need to ensure that Admin1 can enable just in time (JIT) VM access for VM1.

What should you do?

- A. Create and configure a network security group (NSG).
- B. Create and configure an additional public IP address for VM1.
- C. Replace the Basic Load Balancer with an Azure Standard Load Balancer.
- D. Assign an Azure Active Directory Premium Plan 1 license to Admin1.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/security-center/security-center-just-in-time?tabs=jit-config-asc%2Cjit-request-asc>

QUESTION 39

HOTSPOT

You have an Azure Sentinel workspace that contains an Azure Active Directory (Azure AD) connector, an Azure Log Analytics query named Query1 and a playbook named Playbook1.

Query1 returns a subset of security events generated by Azure AD.

You plan to create an Azure Sentinel analytic rule based on Query1 that will trigger Playbook1.

You need to ensure that you can add Playbook1 to the new rule.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Create the rule and set the type to:

	▼
Fusion	
Microsoft Security incident creation	
Scheduled	

Configure the playbook to include:

	▼
A managed connector	
A system-assigned managed identity	
A trigger	
Diagnostic settings	

Correct Answer:

Answer Area

Create the rule and set the type to:

	▼
Fusion	
Microsoft Security incident creation	
Scheduled	

Configure the playbook to include:

	▼
A managed connector	
A system-assigned managed identity	
A trigger	
Diagnostic settings	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/sentinel/tutorial-detect-threats-custom>

<https://docs.microsoft.com/en-us/azure/sentinel/tutorial-respond-threats-playbook>

QUESTION 40

HOTSPOT

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Attached to	NSG
NSG1	Network security group (NSG)	VM5	<i>Not applicable</i>
NSG2	Network security group (NSG)	Subnet1	<i>Not applicable</i>
Subnet1	Subnet	<i>Not applicable</i>	<i>Not applicable</i>
VM5	Virtual machine	Subnet1	NSG1

An IP address of 10.1.0.4 is assigned to VM5. VM5 does not have a public IP address.

VM5 has just in time (JIT) VM access configured as shown in the following exhibit.

JIT VM access configuration

×

VM5

+ Add Save × Discard

Configure the ports for which the just-in-time VM access will be applicable

Port	Protocol	Allowed source IPs	IP range	Time range (hours)	
3389	Any	Per request	N/A	3 hours	...

You enable JIT VM access for VM5.

NSG1 has the inbound rules shown in the following exhibit.

Priority	Name	Port	Protocol	Source	Destination	Action
100	 SecurityCenter-JITRule-...	3389	Any	Any	10.1.0.4	 Allow
1000	SecurityCenter-JITRule_341...	3389	Any	Any	10.1.0.4	 Deny
1001	RDP	3389	TCP	Any	Any	 Allow
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	 Allow
65001	AllowAzureLoadBalancerIn...	Any	Any	AzureLoadBalancer	Any	 Allow
65500	DenyAllInBound	Any	Any	Any	Any	 Deny

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
Deleting the security rule that has a priority of 100 will revoke the approved JIT access request.	☐	☐
Remote Desktop access to VM5 is blocked.	☐	☐
An Azure Bastion host will enable Remote Desktop access to VM5 from the internet.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
Deleting the security rule that has a priority of 100 will revoke the approved JIT access request.	☒	☐
Remote Desktop access to VM5 is blocked.	☒	☐
An Azure Bastion host will enable Remote Desktop access to VM5 from the internet.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

QUESTION 41

You have an Azure Active Directory (Azure AD) tenant and a root management group.

You create 10 Azure subscriptions and add the subscriptions to the root management group.

You need to create an Azure Blueprints definition that will be stored in the root management group.

What should you do first?

- A. Modify the role-based access control (RBAC) role assignments for the root management group.
- B. Add an Azure Policy definition to the root management group.
- C. Create a user assigned identity.
- D. Create a service principal.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/elevate-access-global-admin>

QUESTION 42

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named contoso.com that contains the users shown in the following table.

Name	Role
Admin1	Global administrator
Admin2	Group administrator
Admin3	User administrator

Contoso.com contains a group naming policy. The policy has a custom blocked word list rule that includes the word Contoso.

Which users can create a group named Contoso Sales in contoso.com? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Users who can create a security group named Contoso Sales:

☐ Admin1 only

☐ Admin1 and Admin2 only

☐ Admin1 and Admin3 only

☐ Admin1, Admin2, and Admin3

Users who can create an Office 365 group named Contoso Sales:

☐ Admin1 only

☐ Admin1 and Admin2 only

☐ Admin1 and Admin3 only

☐ Admin1, Admin2, and Admin3

Correct Answer:

Answer Area

Users who can create a security group named Contoso Sales:

☐ Admin1 only

☐ Admin1 and Admin2 only

☒ Admin1 and Admin3 only

☐ Admin1, Admin2, and Admin3

Users who can create an Office 365 group named Contoso Sales:

☐ Admin1 only

☐ Admin1 and Admin2 only

☒ Admin1 and Admin3 only

☐ Admin1, Admin2, and Admin3

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/groups-naming-policy>

QUESTION 43

DRAG DROP

You have five Azure subscriptions linked to a single Azure Active Directory (Azure AD) tenant.

You create an Azure Policy initiative named SecurityPolicyInitiative1.

You identify which standard role assignments must be configured on all new resource groups.

You need to enforce SecurityPolicyInitiative1 and the role assignments when a new resource group is created.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Answer Area

Publish an Azure Blueprints version

Assign an Azure blueprint.

Create a policy assignment.

Create a custom role-based access control (RBAC) role.

Create a dedicated management subscription.

Create an Azure Blueprints definition.

Create an initiative assignment.



Correct Answer:

Actions	Answer Area
Publish an Azure Blueprints version	Create an Azure Blueprints definition.
Assign an Azure blueprint.	Publish an Azure Blueprints version
Create a policy assignment.	Assign an Azure blueprint.
Create a custom role-based access control (RBAC) role.	
Create a dedicated management subscription.	
Create an Azure Blueprints definition.	
Create an initiative assignment.	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/governance/blueprints/create-blueprint-portal>

<https://docs.microsoft.com/en-us/azure/azure-australia/azure-policy>

QUESTION 44

You have three on-premises servers named Server1, Server2, and Server3 that run Windows. Server1 and Server2 are located on the Internal network. Server3 is located on the premises network. All servers have access to Azure.

From Azure Sentinel, you install a Windows firewall data connector.

You need to collect Microsoft Defender Firewall data from the servers for Azure Sentinel.

What should you do?

- A. Create an event subscription from Server1, Server2 and Server3
- B. Install the On-premises data gateway on each server.
- C. Install the Microsoft Agent on each server.
- D. Install the Microsoft Agent on Server1 and Server2 install the on-premises data gateway on Server3.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/sentinel/connect-windows-firewall>

QUESTION 45

You have an Azure subscription that contains several Azure SQL databases and an Azure Sentinel workspace.

You need to create a saved query in the workspace to find events reported by Advanced Threat Protection for Azure SQL Database.

What should you do?

- A. From Azure CLI run the `Get-AzOperationalInsightsworkspace` cmdlet.
- B. From the Azure SQL Database query editor, create a Transact-SQL query.
- C. From the Azure Sentinel workspace, create a Kusto Query Language query.
- D. From Microsoft SQL Server Management Studio (SSMS), create a Transact-SQL query.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

QUESTION 46

HOTSPOT

You plan to use Azure Sentinel to create an analytic rule that will detect suspicious threats and automate responses.

Which components are required for the rule? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Detect suspicious threats:

☐	A Kusto query language query
☐	A Transact-SQL query
☐	An Azure PowerShell query
☐	An Azure Sentinel playbook

Automate responses:

☐	An Azure Functions app
☐	An Azure PowerShell script
☐	An Azure Sentinel playbook
☐	An Azure Sentinel workbook

Correct Answer:

Answer Area

Detect suspicious threats:

	▼
A Kusto query language query	
A Transact-SQL query	
An Azure PowerShell query	
An Azure Sentinel playbook	

Automate responses:

	▼
An Azure Functions app	
An Azure PowerShell script	
An Azure Sentinel playbook	
An Azure Sentinel workbook	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/sentinel/tutorial-detect-threats-custom>

<https://docs.microsoft.com/en-us/azure/sentinel/tutorial-respond-threats-playbook>

QUESTION 47

You are collecting events from Azure virtual machines to an Azure Log Analytics workspace.

You plan to create alerts based on the collected events.

You need to identify which Azure services can be used to create the alerts.

Which two services should you identify? Each correct answer presents a complete solution

NOTE: Each correct selection is worth one point.

- A. Azure Monitor
- B. Azure Security Center
- C. Azure Analytics Services
- D. Azure Sentinel
- E. Azure Advisor

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Secure data and applications

Testlet 1

This is a case study. **Case studies are not timed separately. You can use as much exam time as you would like to complete each case.** However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the **Next** button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an **All Information** tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the **Question** button to return to the question.

Overview

Litware, Inc. is a digital media company that has 500 employees in the Chicago area and 20 employees in the San Francisco area.

Existing Environment

Litware has an Azure subscription named Sub1 that has a subscription ID of 43894a43-17c2-4a39-8cfc-3540c2653ef4.

Sub1 is associated to an Azure Active Directory (Azure AD) tenant named litwareinc.com. The tenant contains the user objects and the device objects of all the Litware employees and their devices. Each user is assigned an Azure AD Premium P2 license. Azure AD Privileged Identity Management (PIM) is activated.

The tenant contains the groups shown in the following table.

Name	Type	Description
Group1	Security group	A group that has the Dynamic User membership type, contains all the San Francisco users, and provides access to many Azure AD applications and Azure resources.
Group2	Security group	A group that has the Dynamic User membership type and contains the Chicago IT team

The Azure subscription contains the objects shown in the following table.

Name	Type	Description
VNet1	Virtual network	VNet1 is a virtual network that contains security-sensitive IT resources. VNet1 contains three subnets named Subnet0, Subnet1, and AzureFirewallSubnet.
VM0	Virtual machine	VM0 is an Azure virtual machine that runs Windows Server 2016, connects to Subnet0, and has just in time (JIT) VM access configured.
VM1	Virtual machine	VM1 is an Azure virtual machine that runs Windows Server 2016 and connects to Subnet0.
SQLDB1	Azure SQL Database	SQLDB1 is an Azure SQL database on a SQL Database server named LitwareSQLServer1.
WebApp1	Web app	WebApp1 is an Azure web app that is accessible by using https://www.litwareinc.com and http://www.litwareinc.com.
RG1	Resource group	RG1 is a resource group that contains VNet1, VM0, and VM1.
RG2	Resource group	RG2 is a resource group that contains shared IT resources.

Azure Security Center is set to the Standard tier.

Requirements

Planned Changes

Litware plans to deploy the Azure resources shown in the following table.

Name	Type	Description
Firewall1	Azure Firewall	An Azure firewall on VNet1.
RT1	Route table	A route table that will contain a route pointing to Firewall1 as the default gateway and will be assigned to Subnet0.
AKS1	Azure Kubernetes Service (AKS)	A managed AKS cluster

Identity and Access Requirements

Litware identifies the following identity and access requirements:

- All San Francisco users and their devices must be members of Group1.
- The members of Group2 must be assigned the Contributor role to RG2 by using a permanent eligible assignment.
- Users must be prevented from registering applications in Azure AD and from consenting to applications that access company information on the users' behalf.

Platform Protection Requirements

Litware identifies the following platform protection requirements:

-
- Microsoft Antimalware must be installed on the virtual machines in RG1.
- The members of Group2 must be assigned the Azure Kubernetes Service Cluster Admin Role.
- Azure AD users must be able to authenticate to AKS1 by using their Azure AD credentials.
- Following the implementation of the planned changes, the IT team must be able to connect to VM0 by using JIT VM access.
- A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in RG1. Role1 must be available only for RG1.

Security Operations Requirements

Litware must be able to customize the operating system security configurations in Azure Security Center.

Data and Application Requirements

Litware identifies the following data and applications requirements:

- The users in Group2 must be able to authenticate to SQLDB1 by using their Azure AD credentials.
- WebApp1 must enforce mutual authentication.

General Requirements

Litware identifies the following general requirements:

- Whenever possible, administrative effort must be minimized.
- Whenever possible, use of automation must be maximized.

QUESTION 1

You need to configure WebApp1 to meet the data and application requirements.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Upload a public certificate.
- B. Turn on the HTTPS Only protocol setting.
- C. Set the Minimum TLS Version protocol setting to 1.2.
- D. Change the pricing tier of the App Service plan.
- E. Turn on the Incoming client certificates protocol setting.

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

A: To configure Certificates for use in Azure Websites Applications you need to upload a public Certificate.

C: Over time, multiple versions of TLS have been released to mitigate different vulnerabilities. TLS 1.2 is the most current version available for apps running on Azure App Service.

Incorrect Answers:

B: We need support the http url as well.

Note:

WebApp1 is an Azure web app that is accessible by using <https://litwareinc.com> and <http://www.litwareinc.com>.

References:

<https://docs.microsoft.com/en-us/azure/app-service/app-service-web-configure-tls-mutual-auth>

<https://azure.microsoft.com/en-us/updates/app-service-and-functions-hosted-apps-can-now-update-tls-versions/>

QUESTION 2

HOTSPOT

You need to create Role1 to meet the platform protection requirements.

How should you complete the role definition of Role1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
{
  "Name": "Role1",
  "Id": "11111111-1111-1111-1111-111111111111",
  "IsCustom" : true,
  "Description": "VM storage operator"
  "Actions" : [
```

Microsoft.Compute/	disks/**,
Microsoft.Resources/	storageAccounts/**,
Microsoft.Storage/	virtualMachines/disks/**,

```
    ],
  "NotActions": [
    ],
  "AssignableScopes": [
```

"/
"/subscriptions/43894a43-17c2-4a39-8cfc-3540c2653ef4/resourceGroups/RG1"
"/subscriptions/43894a43-17c2-4a39-8cfc-3540c2653ef4

```
    ]
  }
```

Correct Answer:

Answer Area

```
{  
  "Name": "Role1",  
  "Id": "11111111-1111-1111-1111-111111111111",  
  "IsCustom" : true,  
  "Description": "VM storage operator"  
  "Actions" : [  

```

▼	▼
Microsoft.Compute/ Microsoft.Resources/ Microsoft.Storage/	disks/*, storageAccounts/*, virtualMachines/disks/*,

```
    ],  
  "NotActions": [  
  ],  
  "AssignableScopes": [  

```

▼
*/ */subscriptions/43894a43-17c2-4a39-8cfc-3540c2653ef4/resourceGroups/RG1/ */subscriptions/43894a43-17c2-4a39-8cfc-3540c2653ef4

```
    ]  

```

```
}
```

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Scenario: A new custom RBAC role named Role1 must be used to delegate the administration of the managed disks in RG1. Role1 must be available only for RG1.

Azure RBAC template managed disks "Microsoft.Storage/"

Reference:

<https://blogs.msdn.microsoft.com/azureedu/2017/02/11/new-managed-disk-storage-option-for-your-azure-vms/>

<https://blogs.msdn.microsoft.com/azure4fun/2016/10/21/custom-azure-rbac-roles-and-how-to-extend-existing-role-definitions-scope/>

QUESTION 3

DRAG DROP

You need to configure SQLDB1 to meet the data and application requirements.

Which three actions should you recommend be performed in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Answer Area

From the Azure portal, create an Azure AD administrator for LitwareSQLServer1.

In SQLDB1, create contained database users.


Connect to SQLDB1 by using Microsoft SQL Server Management Studio (SSMS).

In Azure AD, create a system-assigned managed identity.

In Azure AD, create a user-assigned managed identity.



Correct Answer:

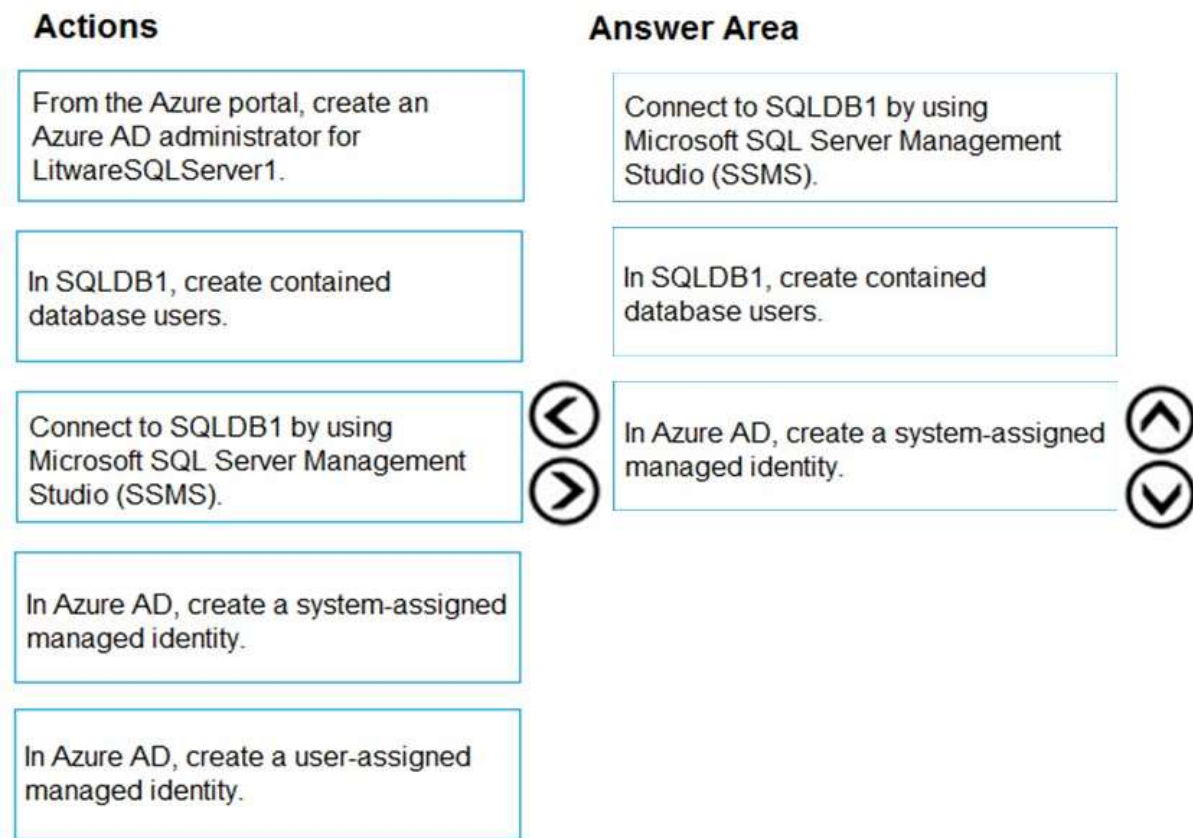

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Connect to SQLDB1 by using Microsoft SQL Server Management Studio (SSMS)

Step 2: In SQLDB1, create contained database users.

Create a contained user in the database that represents the VM's system-assigned identity.

Step 3: In Azure AD, create a system-assigned managed identity.

A system-assigned identity for a Windows virtual machine (VM) can be used to access an Azure SQL server. Managed Service Identities are automatically managed by Azure and enable you to authenticate to services that support Azure AD authentication, without needing to insert credentials into your code.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/tutorial-windows-vm-access-sql>

Secure data and applications

Question Set 2

QUESTION 1

SIMULATION

You need to ensure that User2-11641655 has all the key permissions for KeyVault11641655.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to assign the user the **Key Vault Secrets Officer** role.

1. In the Azure portal, type **Key Vaults** in the search box, select **Key Vaults** from the search results then select **KeyVault11641655**. Alternatively, browse to **Key Vaults** in the left navigation pane.
2. In the key vault properties, select **Access control (IAM)**.
3. In the **Add a role assignment** section, click the **Add** button.
4. In the **Role** box, select the **Key Vault Secrets Officer** role from the drop-down list.
5. In the **Select** box, start typing User2-11641655 and select User2-11641655 from the search results.
6. Click the **Save** button to save the changes.

QUESTION 2

You have an Azure web app named WebApp1.

You upload a certificate to WebApp1.

You need to make the certificate accessible to the app code of WebApp1.

What should you do?

- A. Add a user-assigned managed identity to WebApp1.
- B. Add an app setting to the WebApp1 configuration.
- C. Enable system-assigned managed identity for the WebApp1.
- D. Configure the TLS/SSL binding for WebApp1.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/configure-ssl-certificate-in-code>

QUESTION 3

HOTSPOT

You have the Azure key vaults shown in the following table.

Name	Location	Azure subscription name
KV1	West US	Subscription1
KV2	West US	Subscription1
KV3	East US	Subscription1
KV4	West US	Subscription2
KV5	East US	Subscription2

KV1 stores a secret named Secret1 and a key for a managed storage account named Key1.

You back up Secret1 and Key1.

To which key vaults can you restore each backup? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

You can restore the Secret1 backup to:

	▼
KV1 only	
KV1 and KV2 only	
KV1, KV2 and KV3 only	
KV1, KV2 and KV4 only	
KV1, KV2, KV3, KV4, and KV5	

You can restore the Key1 backup to:

	▼
KV1 only	
KV1 and KV2 only	
KV1, KV2 and KV3 only	
KV1, KV2 and KV4 only	
KV1, KV2, KV3, KV4, and KV5	

Correct Answer:

Answer Area

You can restore the Secret1 backup to:

	▼
KV1 only	
KV1 and KV2 only	
KV1, KV2 and KV3 only	
KV1, KV2 and KV4 only	
KV1, KV2, KV3, KV4, and KV5	

You can restore the Key1 backup to:

	▼
KV1 only	
KV1 and KV2 only	
KV1, KV2 and KV3 only	
KV1, KV2 and KV4 only	
KV1, KV2, KV3, KV4, and KV5	

Section: (none)
Explanation

Explanation/Reference:
Explanation:

The backups can only be restored to key vaults in the same subscription and same geography. You can restore to a different region in the same geography.

QUESTION 4 HOTSPOT

You have an Azure subscription that contains an Azure key vault named Vault1.

On January 1, 2019, Vault1 stores the following secrets.

Enabled : False
Expires :
NotBefore : 5/1/19 12:00:00 AM
Created : 12/20/18 2:55:00 PM
Updated : 12/20/18 2:55:00 PM
ContentType :
Tags :
TagsTable :
VaultName : vault1
Name : Password1
Version :
Id : https://vault1.vault.azure.net:443/secrets/Password1

Enabled : True
Expires : 5/1/19 12:00:00 AM
NotBefore : 3/1/19 12:00:00 AM
Created : 12/20/18 3:00:00 PM
Updated : 12/20/18 3:00:00 PM
ContentType :
Tags :
TagsTable :
VaultName : vault1
Name : Password2
Version :
Id : https://vault1.vault.azure.net:443/secrets/Password2

When can each secret be used by an application? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Password1:

	▼
Never	
Always	
Only after May 1, 2019	

Password2:

	▼
Never	
Always	
Only between March 1, 2019 and May 1. 2019	

Correct Answer:

Answer Area

Password1:

▼
Never
Always
Only after May 1, 2019

Password2:

▼
Never
Always
Only between March 1, 2019 and May 1. 2019

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Never
Password1 is disabled.

Box 2: Only between March 1, 2019 and May 1,
Password2:

```
Expires       : 5/1/19 12:00:00 AM
NotBefore     : 3/1/19 12:00:00 AM
```

Reference:

<https://docs.microsoft.com/en-us/powershell/module/azurerm.keyvault/set-azurekeyvaultsecretattribute>

QUESTION 5

You have an Azure web app named webapp1.

You need to configure continuous deployment for webapp1 by using an Azure Repo.

What should you create first?

- A. an Azure Application Insights service
- B. an Azure DevOps organization
- C. an Azure Storage account
- D. an Azure DevTest Labs lab

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

To use Azure Repos, make sure your Azure DevOps organization is linked to your Azure subscription.

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/deploy-continuous-deployment>

QUESTION 6

Your company has an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

The company develops an application named App1. App1 is registered in Azure AD.

You need to ensure that App1 can access secrets in Azure Key Vault on behalf of the application users.

What should you configure?

- A. an application permission without admin consent
- B. a delegated permission without admin consent
- C. a delegated permission that requires admin consent
- D. an application permission that requires admin consent

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Delegated permissions - Your client application needs to access the web API as the signed-in user, but with access limited by the selected permission. This type of permission can be granted by a user unless the permission requires administrator consent.

Incorrect Answers:

A, D: Application permissions - Your client application needs to access the web API directly as itself (no user context). This type of permission requires administrator consent and is also not available for public (desktop and mobile) client applications.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/quickstart-configure-app-access-web-apis>

QUESTION 7

DRAG DROP

Your company has an Azure Active Directory (Azure AD) tenant named contoso.com.

The company is developing an application named App1. App1 will run as a service on server that runs Windows Server 2016. App1 will authenticate to contoso.com and access Microsoft Graph to read directory data.

You need to delegate the minimum required permissions to App1.

Which three actions should you perform in sequence from the Azure portal? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Answer Area

Grant permissions

Add a delegated permission.

Configure Azure AD Application Proxy.

Add an application permission.

Create an app registration.



Correct Answer:

Actions

Answer Area

Grant permissions

Add a delegated permission.

Configure Azure AD Application Proxy.

Add an application permission.

Create an app registration.

Create an app registration.

Add an application permission.

Grant permissions



Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Create an app registration

First the application must be created/registered.

Step 2: Add an application permission

Application permissions are used by apps that run without a signed-in user present.

Step 3: Grant permissions

Incorrect Answers:

Delegated permission

Delegated permissions are used by apps that have a signed-in user present.

Application Proxy:

Azure Active Directory's Application Proxy provides secure remote access to on-premises web applications.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/v2-permissions-and-consent>

QUESTION 8

Your company has an Azure subscription named Sub1 that is associated to an Azure Active Directory Azure (Azure AD) tenant named contoso.com.

The company develops a mobile application named App1. App1 uses the OAuth 2 implicit grant type to acquire Azure AD access tokens.

You need to register App1 in Azure AD.

What information should you obtain from the developer to register the application?

- A. a redirect URI
- B. a reply URL
- C. a key
- D. an application ID

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

For Native Applications you need to provide a Redirect URI, which Azure AD will use to return token responses.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/develop/v1-protocols-oauth-code>

QUESTION 9

From the Azure portal, you are configuring an Azure policy.

You plan to assign policies that use the `DeployIfNotExist`, `AuditIfNotExist`, `Append`, and `Deny` effects.

Which effect requires a managed identity for the assignment?

- A. `AuditIfNotExist`
- B. `Append`
- C. `DeployIfNotExist`
- D. `Deny`

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

When Azure Policy runs the template in the `deployIfNotExists` policy definition, it does so using a managed identity.

Reference:

<https://docs.microsoft.com/bs-latn-ba/azure/governance/policy/how-to/remediate-resources>

QUESTION 10

HOTSPOT

You have an Azure subscription named Sub1 that is associated to an Azure Active Directory (Azure AD) tenant named contoso.com.

You plan to implement an application that will consist of the resources shown in the following table.

Name	Type	Description
CosmosDBAccount1	Azure Cosmos DB account	A Cosmos DB account containing a database named CosmosDB1 that serves as a back-end tier of the application
WebApp1	Azure web app	A web app configured to serve as the middle tier of the application

Users will authenticate by using their Azure AD user account and access the Cosmos DB account by using resource tokens.

You need to identify which tasks will be implemented in CosmosDB1 and WebApp1.

Which task should you identify for each resource? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

CosmosDB1:

▼

Authenticate Azure AD users and generate resource tokens.

Authenticate Azure AD users and relay resource tokens.

Create database users and generate resource tokens.

WebApp1:

▼

Authenticate Azure AD users and generate resource tokens.

Authenticate Azure AD users and relay resource tokens.

Create database users and generate resource tokens.

Correct Answer:

Answer Area

CosmosDB1:	▼ Authenticate Azure AD users and generate resource tokens. Authenticate Azure AD users and relay resource tokens. Create database users and generate resource tokens.
WebApp1:	▼ Authenticate Azure AD users and generate resource tokens. Authenticate Azure AD users and relay resource tokens. Create database users and generate resource tokens.

Section: (none)

Explanation

Explanation/Reference:


Explanation:

CosmosDB1: Create database users and generate resource tokens.

Azure Cosmos DB resource tokens provide a safe mechanism for allowing clients to read, write, and delete specific resources in an Azure Cosmos DB account according to the granted permissions.

WebApp1: Authenticate Azure AD users and relay resource tokens

A typical approach to requesting, generating, and delivering resource tokens to a mobile application is to use a resource token broker. The following diagram shows a high-level overview of how the sample application uses a resource token broker to manage access to the document database data:

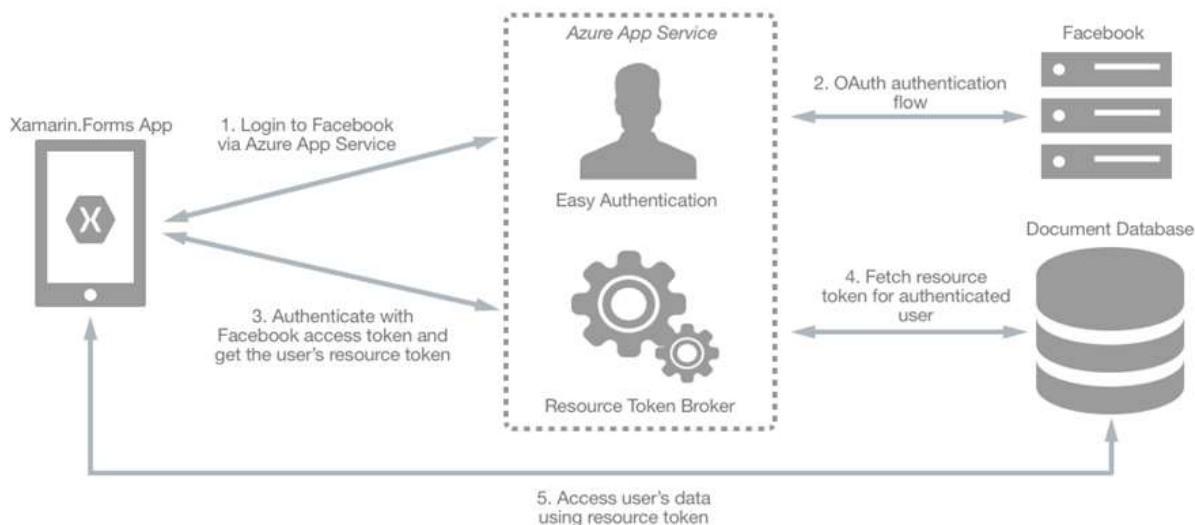

Reference:

<https://docs.microsoft.com/en-us/xamarin/xamarin-forms/data-cloud/cosmosdb/authentication>

QUESTION 11

HOTSPOT

You need to create an Azure key vault. The solution must ensure that any object deleted from the key vault be retained for 90 days.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

```
New-AzKeyVault -VaultName 'KeyVault1' -ResourceGroupName 'RG1'
```

-Location 'East US'

	▼
-EnabledForDeployment	
-EnablePurgeProtection	
-Tag	

	▼
-Confirm	
-DefaultProfile	
-EnableSoftDelete	
-SKU	

Correct Answer:

Answer Area

```
New-AzKeyVault -VaultName 'KeyVault1' -ResourceGroupName 'RG1'
```

-Location 'East US'

	▼
-EnabledForDeployment	
-EnablePurgeProtection	
-Tag	

	▼
-Confirm	
-DefaultProfile	
-EnableSoftDelete	
-SKU	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: -EnablePurgeProtection

If specified, protection against immediate deletion is enabled for this vault; requires soft delete to be enabled as well.

Box 2: -EnableSoftDelete

Specifies that the soft-delete functionality is enabled for this key vault. When soft-delete is enabled, for a grace period, you can recover this key vault and its contents after it is deleted.

Reference:

<https://docs.microsoft.com/en-us/powershell/module/azurerm.keyvault/new-azurermkeyvault>

QUESTION 12

You have an Azure subscription that contains an Azure key vault named Vault1.

In Vault1, you create a secret named Secret1.

An application developer registers an application in Azure Active Directory (Azure AD).

You need to ensure that the application can use Secret1.

What should you do?

- A. In Azure AD, create a role.
- B. In Azure Key Vault, create a key.
- C. In Azure Key Vault, create an access policy.
- D. In Azure AD, enable Azure AD Application Proxy.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure Key Vault provides a way to securely store credentials and other keys and secrets, but your code needs to authenticate to Key Vault to retrieve them.

Managed identities for Azure resources overview makes solving this problem simpler, by giving Azure services an automatically managed identity in Azure Active Directory (Azure AD). You can use this identity to authenticate to any service that supports Azure AD authentication, including Key Vault, without having any credentials in your code.

Example: How a system-assigned managed identity works with an Azure VM

After the VM has an identity, use the service principal information to grant the VM access to Azure resources. To call Azure Resource Manager, use role-based access control (RBAC) in Azure AD to assign the appropriate role to the VM service principal. To call Key Vault, grant your code access to the specific secret or key in Key Vault.

Reference:

<https://docs.microsoft.com/en-us/azure/key-vault/quick-create-net>

<https://docs.microsoft.com/en-us/azure/active-directory/managed-identities-azure-resources/overview>

QUESTION 13

You have an Azure SQL database.

You implement Always Encrypted.

You need to ensure that application developers can retrieve and decrypt data in the database.

Which two pieces of information should you provide to the developers? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. a stored access policy
- B. a shared access signature (SAS)
- C. the column encryption key
- D. user credentials
- E. the column master key

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Always Encrypted uses two types of keys: column encryption keys and column master keys. A column encryption key is used to encrypt data in an encrypted column. A column master key is a key-protecting key that encrypts one or more column encryption keys.

Reference:

<https://docs.microsoft.com/en-us/sql/relational-databases/security/encryption/always-encrypted-database-engine>

QUESTION 14

You have a hybrid configuration of Azure Active Directory (Azure AD).

All users have computers that run Windows 10 and are hybrid Azure AD joined.

You have an Azure SQL database that is configured to support Azure AD authentication.

Database developers must connect to the SQL database by using Microsoft SQL Server Management Studio (SSMS) and authenticate by using their on-premises Active Directory account.

You need to tell the developers which authentication method to use to connect to the SQL database from SSMS. The solution must minimize authentication prompts.

Which authentication method should you instruct the developers to use?

- A. SQL Login
- B. Active Directory – Universal with MFA support
- C. Active Directory – Integrated
- D. Active Directory – Password

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Azure AD can be the initial Azure AD managed domain. Azure AD can also be an on-premises Active Directory Domain Services that is federated with the Azure AD.


Using an Azure AD identity to connect using SSMS or SSDT

The following procedures show you how to connect to a SQL database with an Azure AD identity using SQL Server Management Studio or SQL Server Database Tools.

Active Directory integrated authentication

Use this method if you are logged in to Windows using your Azure Active Directory credentials from a federated domain.

1. Start Management Studio or Data Tools and in the Connect to Server (or Connect to Database Engine) dialog box, in the Authentication box, select Active Directory - Integrated. No password is needed or can be entered because your existing credentials will be presented for the connection.

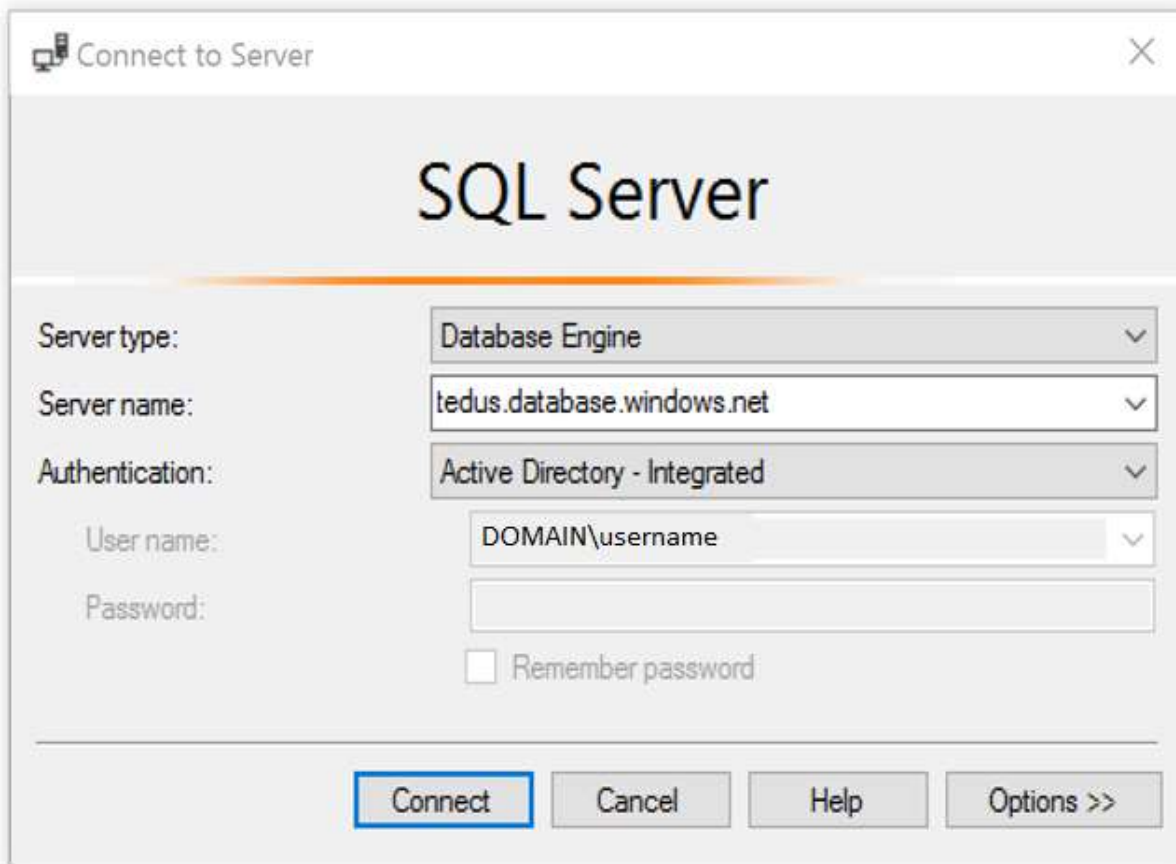

2. Select the Options button, and on the Connection Properties page, in the Connect to database box, type the name of the user database you want to connect to. (The AD domain name or tenant ID" option is only supported for Universal with MFA connection options, otherwise it is greyed out.)

Reference:

<https://docs.microsoft.com/en-us/azure/azure-sql/database/authentication-aad-configure?tabs=azure-powershell>

QUESTION 15

DRAG DROP

You have an Azure subscription named Sub1 that contains an Azure Storage account named contosostorage1 and an Azure key vault named Contosokeyvault1.

You plan to create an Azure Automation runbook that will rotate the keys of contosostorage1 and store them in Contosokeyvault1.

You need to implement prerequisites to ensure that you can implement the runbook.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Run Set-AzKeyVaultAccessPolicy.

Create an Azure Automation account.

Import PowerShell modules to the Azure Automation account.

Create a user-assigned managed identity.

Create a connection resource in the Azure Automation account.

Answer Area



Correct Answer:

Actions

Run Set-AzKeyVaultAccessPolicy.

Create an Azure Automation account.

Import PowerShell modules to the Azure Automation account.

Create a user-assigned managed identity.

Create a connection resource in the Azure Automation account.

Answer Area

Create an Azure Automation account.

Import PowerShell modules to the Azure Automation account.

Create a connection resource in the Azure Automation account.



Section: (none)

Explanation

Explanation/Reference:

Explanation:

Step 1: Create an Azure Automation account
Runbooks live within the Azure Automation account and can execute PowerShell scripts.

Step 2: Import PowerShell modules to the Azure Automation account
Under 'Assets' from the Azure Automation account Resources section select 'to add in Modules to the runbook. To execute key vault cmdlets in the runbook, we need to add AzureRM.profile and AzureRM.key vault.

Step 3: Create a connection resource in the Azure Automation account

You can use the sample code below, taken from the AzureAutomationTutorialScript example runbook, to authenticate using the Run As account to manage Resource Manager resources with your runbooks. The AzureRunAsConnection is a connection asset automatically created when we created 'run as accounts' above. This can be found under Assets -> Connections. After the authentication code, run the same code above to get all the keys from the vault.

```
$connectionName = "AzureRunAsConnection"
try
{
    # Get the connection "AzureRunAsConnection "
    $servicePrincipalConnection=Get-AutomationConnection -Name $connectionName

    "Logging in to Azure..."
    Add-AzureRmAccount `
        -ServicePrincipal `
        -TenantId $servicePrincipalConnection.TenantId `
        -ApplicationId $servicePrincipalConnection.ApplicationId `
        -CertificateThumbprint $servicePrincipalConnection.CertificateThumbprint
}
```

Reference:

<https://www.rahulpnath.com/blog/accessing-azure-key-vault-from-azure-runbook/>

QUESTION 16

You have an Azure SQL Database server named SQL1.

You turn on Advanced Threat Protection for SQL1 to detect all threat detection types.

Which action will Advanced Threat Protection detect as a threat?

- A. A user updates more than 50 percent of the records in a table.
- B. A user attempts to sign in as `SELECT * FROM table1`.
- C. A user is added to the db_owner database role.
- D. A user deletes more than 100 records from the same table.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Advanced Threat Protection can detect potential SQL injections: This alert is triggered when an active exploit happens against an identified application vulnerability to SQL injection. This means the attacker is trying to inject malicious SQL statements using the vulnerable application code or stored procedures.

Reference:

<https://docs.microsoft.com/en-us/azure/sql-database/sql-database-threat-detection-overview>

QUESTION 17

HOTSPOT

You have the Azure Information Protection labels as shown in the following table.

Name	Use condition	Label is applied	Pattern	Case sensitivity
Label1	Condition1	Automatically	White	On
Label2	Condition2	Automatically	Black	Off

You have the Azure Information Protection policies as shown in the following table.

Name	Applies to	Use label	Set the default label
Global	<i>Not applicable</i>	<i>None</i>	None
Policy1	User1	Label1	None
Policy2	User1	Label2	None

You need to identify how Azure Information Protection will label files.

What should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

If User1 creates a Microsoft Word file that includes the text "Black and White", the file will be assigned:

▼

No label
Label1 only
Label2 only
Label1 and Label2

If User1 creates a Microsoft Notepad file that includes the text "Black or white", the file will be assigned:

▼

No label
Label1 only
Label2 only
Label1 and Label2

Correct Answer:

Answer Area

If User1 creates a Microsoft Word file that includes the text "Black and White", the file will be assigned:

	▼
No label	
Label1 only	
Label2 only	
Label1 and Label2	

If User1 creates a Microsoft Notepad file that includes the text "Black or white", the file will be assigned:

	▼
No label	
Label1 only	
Label2 only	
Label1 and Label2	

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Box 1: Label 2 only

How multiple conditions are evaluated when they apply to more than one label

1. The labels are ordered for evaluation, according to their position that you specify in the policy: The label positioned first has the lowest position (least sensitive) and the label positioned last has the highest position (most sensitive).
2. The most sensitive label is applied.
3. The last sublabel is applied.

Box 2: No Label

Automatic classification applies to Word, Excel, and PowerPoint when documents are saved, and apply to Outlook when emails are sent. Automatic classification does not apply to Microsoft Notepad.

Reference:

<https://docs.microsoft.com/en-us/azure/information-protection/configure-policy-classification>

QUESTION 18

Your company uses Azure DevOps.

You need to recommend a method to validate whether the code meets the company's quality standards and code review standards.

What should you recommend implementing in Azure DevOps?

- A. branch folders
- B. branch permissions
- C. branch policies
- D. branch locking

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Branch policies help teams protect their important branches of development. Policies enforce your team's code quality and change management standards.

Reference:

<https://docs.microsoft.com/en-us/azure/devops/repos/git/branch-policies?view=azure-devops&viewFallbackFrom=vsts>

QUESTION 19

DRAG DROP

You have an Azure subscription named Sub1. Sub1 contains an Azure virtual machine named VM1 that runs Windows Server 2016.

You need to encrypt VM1 disks by using Azure Disk Encryption.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions	Answer Area
Run Set-AzStorageAccount.	
Create an Azure key vault.	
Configure access policies for the Azure key vault.	
Configure secrets for the Azure key vault.	
Run Set-AzVMDiskEncryptionExtension.	

Correct Answer:

Actions	Answer Area
Run Set-AzStorageAccount.	Create an Azure key vault.
	Configure access policies for the Azure key vault.
	Run Set-AzVMDiskEncryptionExtension.
Configure secrets for the Azure key vault.	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/encrypt-disks>

QUESTION 20

You have an Azure subscription that contains a virtual machine named VM1.

You create an Azure key vault that has the following configurations:

- Name: Vault5
- Region: West US
- Resource group: RG1

You need to use Vault5 to enable Azure Disk Encryption on VM1. The solution must support backing up VM1 by using Azure Backup.

Which key vault settings should you configure?

- A. Access policies
- B. Secrets
- C. Keys
- D. Locks

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/key-vault/key-vault-secure-your-key-vault>

QUESTION 21

You have an Azure subscription named Sub1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
sa1	Azure Storage account	East US	RG1
VM1	Azure virtual machine	East US	RG2
KV1	Azure key vault	East US 2	RG1
SQL1	Azure SQL database	East US 2	RG2

You need to ensure that you can provide VM1 with secure access to a database on SQL1 by using a contained database user.

What should you do?

- A. Enable a managed identity on VM1.
- B. Create a secret in KV1.
- C. Configure a service endpoint on SQL1.
- D. Create a key in KV1.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

QUESTION 22

You have an Azure subscription named Sub1 that contains the Azure key vaults shown in the following table:

Name	Region	Resource group
Vault1	West Europe	RG1
Vault2	East US	RG1
Vault3	West Europe	RG2
Vault4	East US	RG2

In Sub1, you create a virtual machine that has the following configurations:

- Name: VM1
- Size: DS2v2
- Resource group: RG1
- Region: West Europe
- Operating system: Windows Server 2016

You plan to enable Azure Disk Encryption on VM1.

In which key vaults can you store the encryption key for VM1?

- A. Vault1 or Vault3 only
- B. Vault1, Vault2, Vault3, or Vault4
- C. Vault1 only
- D. Vault1 or Vault2 only

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

In order to make sure the encryption secrets don't cross regional boundaries, Azure Disk Encryption needs the Key Vault and the VMs to be co-located in the same region. Create and use a Key Vault that is in the same region as the VM to be encrypted.

Reference:

<https://docs.microsoft.com/en-us/azure/security/azure-security-disk-encryption-prerequisites>

QUESTION 23

HOTSPOT

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
User1	Azure Active Directory (Azure AD) user
User2	Azure Active Directory (Azure AD) user
Group1	Azure Active Directory (Azure AD) group
Vault1	Azure key vault

User1 is a member of Group1. Group1 and User2 are assigned the Key Vault Contributor role for Vault1.

On January 1, 2019, you create a secret in Vault1. The secret is configured as shown in the exhibit. (Click the **Exhibit** tab.)

Create a secret

Upload options

Manual 

* Name

Password1 

* Value

• • • • • 

Content type (optional)

Set activation date?  ☒

Activation Date

2019-03-01  12:00:00 AM

(UTC+02:00) --- Current Time Zone --- 

Set expiration date?  ☒

Expiration Date

2020-03-01  12:00:00 AM

(UTC+02:00) --- Current Time Zone --- 

Enabled?

User2 is assigned an access policy to Vault1. The policy has the following configurations:

- Key Management Operations: Get, List, and Restore
- Cryptographic Operations: Decrypt and Unwrap Key
- Secret Management Operations: Get, List, and Restore

Group1 is assigned an access policy to Vault1. The policy has the following configurations:

- Key Management Operations: Get and Recover
- Secret Management Operations: List, Backup, and Recover

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
On January 1, 2019, User1 can view the value of Password1.	☐	☐
On June 1, 2019, User2 can view the value of Password1.	☐	☐
On June 1, 2019, User1 can view the value of Password1.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
On January 1, 2019, User1 can view the value of Password1.	☐	☒
On June 1, 2019, User2 can view the value of Password1.	☒	☐
On June 1, 2019, User1 can view the value of Password1.	☐	☒

Section: (none)
Explanation

Explanation/Reference:

QUESTION 24

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named contoso1812.onmicrosoft.com that contains the users shown in the following table.

Name	Username	Type
User1	User1@contoso1812.onmicrosoft.com	Member
User2	User2@contoso1812.onmicrosoft.com	Member
User3	User3@contoso1812.onmicrosoft.com	Member
User4	User4@outlook.com	Guest

You create an Azure Information Protection label named Label1. The Protection settings for Label1 are configured as shown in the exhibit. (Click the Exhibit tab.)

Protection

Contoso1812 - Azure Information Protection

Protections settings ⓘ

Azure (cloud key) **HYOK (AD RMS)**

Select the protection action type ⓘ

- ☒ Set permissions
- ☐ Set user-defined permissions (Preview)

USERS

PERMISSIONS

AuthenticatedUsers

Viewer

User1@contoso1812.onmicrosoft.com

Co-Author

User2@contoso1812.onmicrosoft.com

Reviewer

[+Add permissions](#)

Label1 is applied to a file named File1.

For each of the following statements, select Yes if the statement is true, Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
User1 can print File1.	☐	☐
User3 can read File1.	☐	☐
User4 can print File1.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
User1 can print File1.	☒	☐
User3 can read File1.	☒	☐
User4 can print File1.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

QUESTION 25

SIMULATION

You need to prevent HTTP connections to the rg1lod10598168n1 Azure Storage account.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)


Explanation

Explanation/Reference:

Explanation:

The "Secure transfer required" feature is now supported in Azure Storage account. This feature enhances the security of your storage account by enforcing all requests to your account through a secure connection. This feature is disabled by default.

1. In Azure Portal select you Azure Storage account rg1lod10598168n1.
2. Select Configuration, and Secure Transfer required.

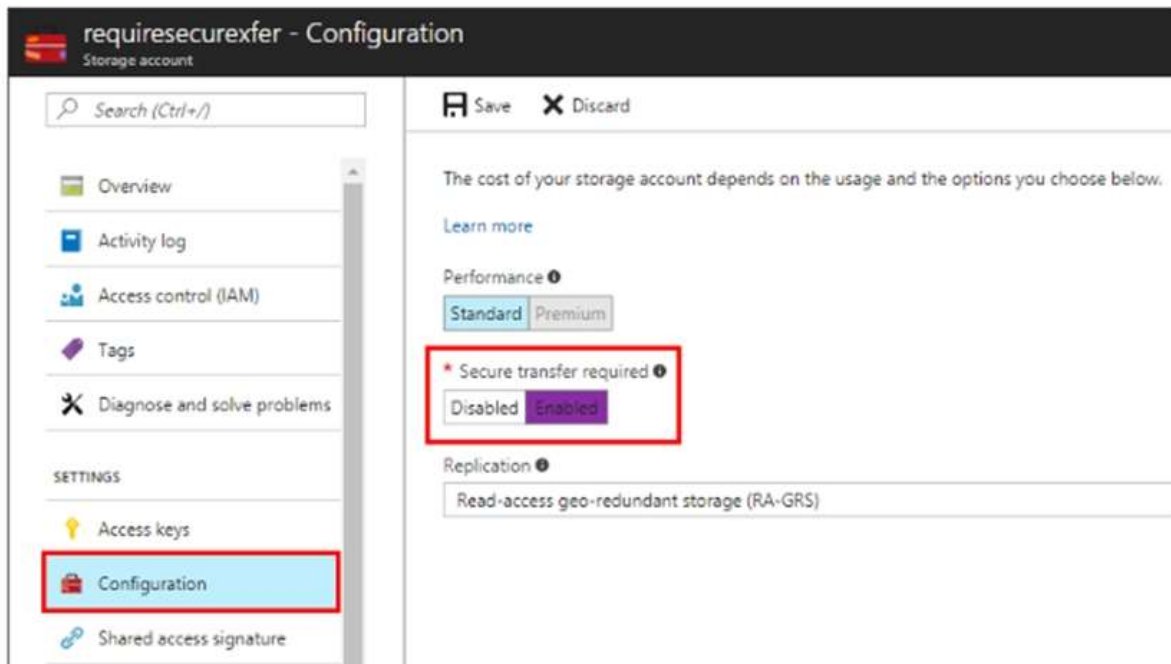

Reference:

<https://techcommunity.microsoft.com/t5/Azure/quot-Secure-transfer-required-quot-is-available-in-Azure-Storage/m-p/82475>

QUESTION 26

SIMULATION

You need to ensure that the rg1lod10598168n1 Azure Storage account is encrypted by using a key stored in the KeyVault10598168 Azure key vault.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation


Explanation/Reference:

Explanation:

Step 1: To enable customer-managed keys in the Azure portal, follow these steps:

1. Navigate to your storage account rg1lod10598168n1

2. On the Settings blade for the storage account, click Encryption. Select the Use your own key option, as shown in the following figure.

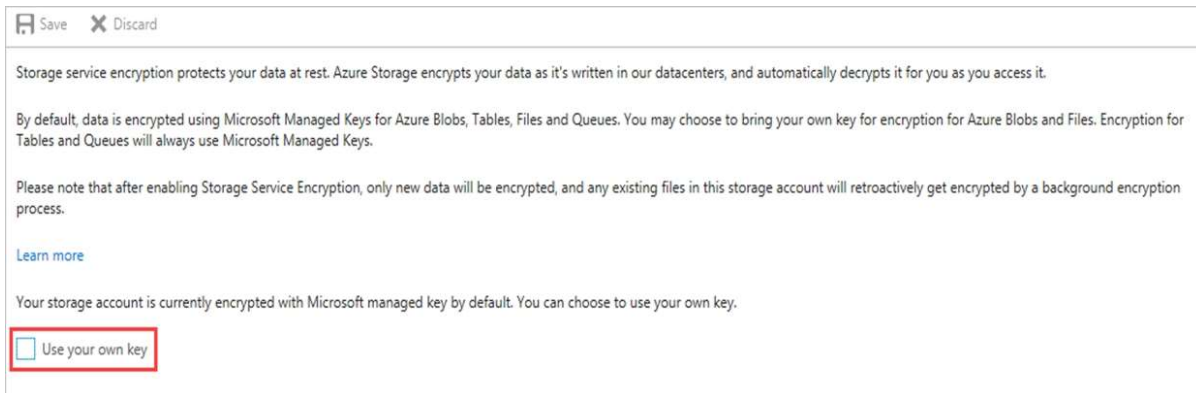

Save X Discard

Storage service encryption protects your data at rest. Azure Storage encrypts your data as it's written in our datacenters, and automatically decrypts it for you as you access it.

By default, data is encrypted using Microsoft Managed Keys for Azure Blobs, Tables, Files and Queues. You may choose to bring your own key for encryption for Azure Blobs and Files. Encryption for Tables and Queues will always use Microsoft Managed Keys.

Please note that after enabling Storage Service Encryption, only new data will be encrypted, and any existing files in this storage account will retroactively get encrypted by a background encryption process.

[Learn more](#)

Your storage account is currently encrypted with Microsoft managed key by default. You can choose to use your own key.

☒ Use your own key


Step 2: Specify a key from a key vault

To specify a key from a key vault, first make sure that you have a key vault that contains a key. To specify a key from a key vault, follow these steps:

4. Choose the Select from Key Vault option.

5. Choose the key vault KeyVault10598168 containing the key you want to use.

6. Choose the key from the key vault.

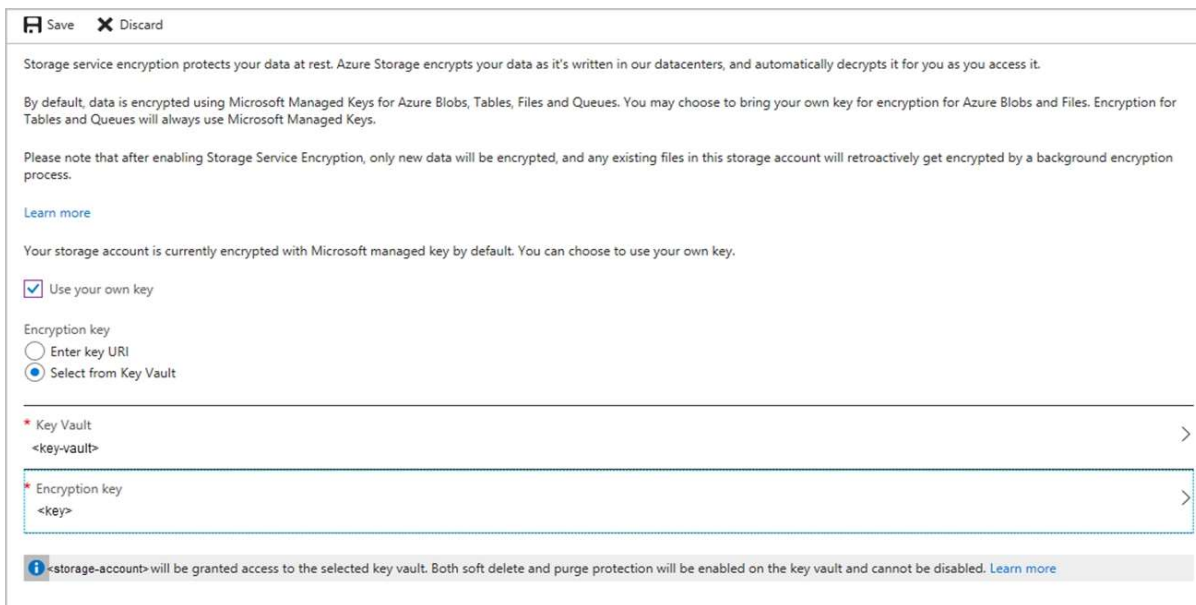

Save X Discard

Storage service encryption protects your data at rest. Azure Storage encrypts your data as it's written in our datacenters, and automatically decrypts it for you as you access it.

By default, data is encrypted using Microsoft Managed Keys for Azure Blobs, Tables, Files and Queues. You may choose to bring your own key for encryption for Azure Blobs and Files. Encryption for Tables and Queues will always use Microsoft Managed Keys.

Please note that after enabling Storage Service Encryption, only new data will be encrypted, and any existing files in this storage account will retroactively get encrypted by a background encryption process.

[Learn more](#)

Your storage account is currently encrypted with Microsoft managed key by default. You can choose to use your own key.

☒ Use your own key

Encryption key

☐ Enter key URI

☒ Select from Key Vault

* Key Vault
<key-vault>

* Encryption key
<key>

! <storage-account> will be granted access to the selected key vault. Both soft delete and purge protection will be enabled on the key vault and cannot be disabled. [Learn more](#)

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-encryption-keys-portal>

QUESTION 27

You have a web app named WebApp1.

You create a web application firewall (WAF) policy named WAF1.

You need to protect WebApp1 by using WAF1.

What should you do first?

- A. Deploy an Azure Front Door.
- B. Add an extension to WebApp1.
- C. Deploy Azure Firewall.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/frontdoor/quickstart-create-front-door>

QUESTION 28

SIMULATION

You need to configure a weekly backup of an Azure SQL database named Homepage. The backup must be retained for eight weeks.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure the backup policy for the Azure SQL database.

1. In the Azure portal, type **Azure SQL Database** in the search box, select **Azure SQL Database** from the search results then select **Homepage**. Alternatively, browse to Azure SQL Database in the left navigation pane.
2. Select the server hosting the **Homepage** database and click on **Manage backups**.
3. Click on **Configure policies**.
4. Ensure that the **Weekly Backups** option is ticked.
5. Configure the **How long would you like weekly backups to be retained** option to **8 weeks**.
6. Click **Apply** to save the changes.

QUESTION 29

SIMULATION

You need to ensure that when administrators deploy resources by using an Azure Resource Manager template, the deployment can access secrets in an Azure key vault named KV11597200.

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

You need to configure an option in the Advanced Access Policy of the key vault.

1. In the Azure portal, type **Azure Key Vault** in the search box, select **Azure Key Vault** from the search results then select the key vault named KV11597200. Alternatively, browse to Azure Key Vault in the left navigation pane.
2. In the properties of the key vault, click on **Advanced Access Policies**.
3. Tick the checkbox labelled **Enable access to Azure Resource Manager for template deployment**.
4. Click **Save** to save the changes.

QUESTION 30

SIMULATION

You need to ensure that connections through an Azure Application Gateway named Homepage-AGW are inspected for malicious requests.

To complete this task, sign in to the Azure portal.

You do not need to wait for the task to complete.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

You need to enable the Web Application Firewall on the Application Gateway.

1. In the Azure portal, type **Application gateways** in the search box, select **Application gateways** from the search results then select the gateway named Homepage-AGW. Alternatively, browse to Application Gateways in the left navigation pane.
2. In the properties of the application gateway, click on **Web application firewall**.
3. For the **Tier** setting, select **WAF V2**.
4. In the **Firewall status** section, click the slider to switch to **Enabled**.
5. In the **Firewall mode** section, click the slider to switch to **Prevention**.
6. Click **Save** to save the changes.

QUESTION 31

SIMULATION

You need to create a web app named Intranet11597200 and enable users to authenticate to the web app by using Azure Active Directory (Azure AD).

To complete this task, sign in to the Azure portal.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In the Azure portal, type **App services** in the search box and select **App services** from the search results.
2. Click the **Create app service** button to create a new app service.
3. In the Resource Group section, click the **Create new** link to create a new resource group.
4. Give the resource group a name such as Intranet11597200RG and click **OK**.
5. In the **Instance Details** section, enter **Intranet11597200** in the **Name** field.
6. In the **Runtime stack** field, select any runtime stack such as **.NET Core 3.1**.
7. Click the **Review + create** button.
8. Click the **Create** button to create the web app.
9. Click the **Go to resource** button to open the properties of the new web app.
10. In the **Settings** section, click on **Authentication / Authorization**.
11. Click the **App Service Authentication** slider to set it to **On**.

12. In the **Action to take when request is not authentication** box, select **Log in with Azure Active Directory**.

13. Click **Save** to save the changes.

QUESTION 32

HOTSPOT

You have an Azure subscription that contains an Azure key vault named KeyVault1 and the virtual machines shown in the following table.

Name	Private IP address	Public IP address	Connected to
VM1	10.7.0.4	51.144.245.152	VNET1/Default
VM2	10.8.0.4	104.45.9.227	VNET2/Default

You set the Key Vault access policy to Enable access to Azure Disk Encryption for volume encryption.

KeyVault1 is configured as shown in the following exhibit.

 Save  Discard

Allow access from: ☐ All networks ☒ Selected networks

 Configure network access control for your key vault. [Learn More](#)

Virtual networks:  [+ Add existing virtual networks](#) [+ Add new virtual network](#)

VIRTUAL NETWORK	SUBNET	RESOURCE GROUP	SUBSCRIPTION
VNET1	default	RG1	...

Firewall: 

IPv4 ADDRESS OR CIDR

...

Exception:

Allow trusted Microsoft services to bypass this firewall?  ☒ Yes ☐ No

 This setting is related to firewall only. In order to access this key vault, the trusted service must also be given explicit permissions in the Access policies section.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
From VM1, users can manage the keys and secrets stored in KeyVault1.	☐	☐
From VM2, users can manage the keys and secrets stored in KeyVault1.	☐	☐
VM2 can use KeyVault for Azure Disk Encryption	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
From VM1, users can manage the keys and secrets stored in KeyVault1.	☒	☐
From VM2, users can manage the keys and secrets stored in KeyVault1.	☒	☐
VM2 can use KeyVault for Azure Disk Encryption	☒	☐

Section: (none)

Explanation

Explanation/Reference:

QUESTION 33

DRAG DROP

You have an Azure Storage account named storage1 and an Azure virtual machine named VM1. VM1 has a premium SSD managed disk.

You need to enable Azure Disk Encryption for VM1.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Select and Place:

Actions

Run the Set-AzVMDiskEncryptionExtension cmdlet.

Set the Key Vault access policy to **Enable access to Azure Virtual Machines for deployment**.

Set the Key Vault access policy to **Enable access to Azure Disk Encryption for volume encryption**.

Generate a key vault certificate.

Create an Azure key vault.

Configure storage1 to use a customer-managed key.

Answer Area**Correct Answer:****Actions**

Set the Key Vault access policy to **Enable access to Azure Virtual Machines for deployment**.

Generate a key vault certificate.

Configure storage1 to use a customer-managed key.

Answer Area

Create an Azure key vault.

Set the Key Vault access policy to **Enable access to Azure Disk Encryption for volume encryption**.

Run the Set-AzVMDiskEncryptionExtension cmdlet.

Section: (none)**Explanation****Explanation/Reference:**

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/disk-encryption-key-vault>

QUESTION 34**SIMULATION**

You need to enable Advanced Data Security for the SQLdb1 Azure SQL database. The solution must ensure that Azure Advanced Threat Protection (ATP) alerts are sent to User1@contoso.com.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)**Explanation****Explanation/Reference:**

Explanation:

1. In the Azure portal, type **SQL** in the search box, select **SQL databases** from the search results then select **SQLdb1**. Alternatively, browse to **SQL databases** in the left navigation pane.
2. In the properties of SQLdb1, scroll down to the **Security** section and select **Advanced data security**.
3. Click on the **Settings** icon.

4. Tick the **Enable Advanced Data Security at the database level** checkbox.
5. Click **Yes** at the confirmation prompt.
6. In the **Storage account** select a storage account if one isn't selected by default.
7. Under **Advanced Threat Protection Settings**, enter **User1@contoso.com** in the **Send alerts to** box.
8. Click the **Save** button to save the changes.

Reference:

<https://docs.microsoft.com/en-us/azure/azure-sql/database/advanced-data-security>

QUESTION 35

SIMULATION

You plan to use Azure Disk Encryption for several virtual machine disks.

You need to ensure that Azure Disk Encryption can retrieve secrets from the KeyVault11641655 Azure key vault.

To complete this task, sign in to the Azure portal and modify the Azure resources.

Correct Answer: See the explanation below.

Section: (none)

Explanation

Explanation/Reference:

Explanation:

1. In the Azure portal, type **Key Vaults** in the search box, select **Key Vaults** from the search results then select **KeyVault11641655**. Alternatively, browse to **Key Vaults** in the left navigation pane.
2. In the Key Vault properties, scroll down to the **Settings** section and select **Access Policies**.
3. Select the **Azure Disk Encryption for volume encryption**

Enable Access to:

- ☐ Azure Virtual Machines for deployment ⓘ
- ☐ Azure Resource Manager for template deployment ⓘ
- ☒ Azure Disk Encryption for volume encryption ⓘ

4. Click **Save** to save the changes.

QUESTION 36

HOTSPOT

You have an Azure subscription that contains a web app named App1 and an Azure key vault named Vault1.

You need to configure App1 to store and access the secrets in Vault1.

How should you configure App1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Configure App1 to authenticate by using a:

	▼
Key	
Certificate	
Passphrase	
User-assigned managed identity	
System-assigned managed identity	

Configure a Key Vault reference for App1 from the:

	▼
Extensions blade	
General settings tab	
TLS/SSL settings blade	
Application settings tab	

Correct Answer:

Answer Area

Configure App1 to authenticate by using a:

	▼
Key	
Certificate	
Passphrase	
User-assigned managed identity	
System-assigned managed identity	

Configure a Key Vault reference for App1 from the:

	▼
Extensions blade	
General settings tab	
TLS/SSL settings blade	
Application settings tab	

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/app-service/overview-managed-identity?tabs=dotnet>

QUESTION 37

HOTSPOT

You have an Azure key vault named KeyVault1 that contains the items shown in the following table.

Name	Type
Item1	Key
Item2	Secret
Policy1	Access policy

In KeyVault, the following events occur in sequence:

- Item1 is deleted
- Administrator enables soft delete
- Item2 and Policy1 are deleted.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Hot Area:

Answer Area

Statements	Yes	No
You can recover Policy1.	☐	☐
You can add a new key named Item1.	☐	☐
You can add a new secret named Item2.	☐	☐

Correct Answer:

Answer Area

Statements	Yes	No
You can recover Policy1.	☒	☐
You can add a new key named Item1.	☒	☐
You can add a new secret named Item2.	☐	☒

Section: (none)

Explanation

Explanation/Reference:

Reference:

<https://docs.microsoft.com/en-us/azure/key-vault/general/soft-delete-overview>